


AUTOMATIC MODE OPERATION:

1. WHEN SENSOR ACTIVATES, BOTH LOADS TURN ON.
2. LOADS TURN OFF WHEN SENSOR TIMES OUT.

RECOMMENDED WIRE:
18-3 AWG STRANDED WIRE SHIELDED OR
NONSHIELDED

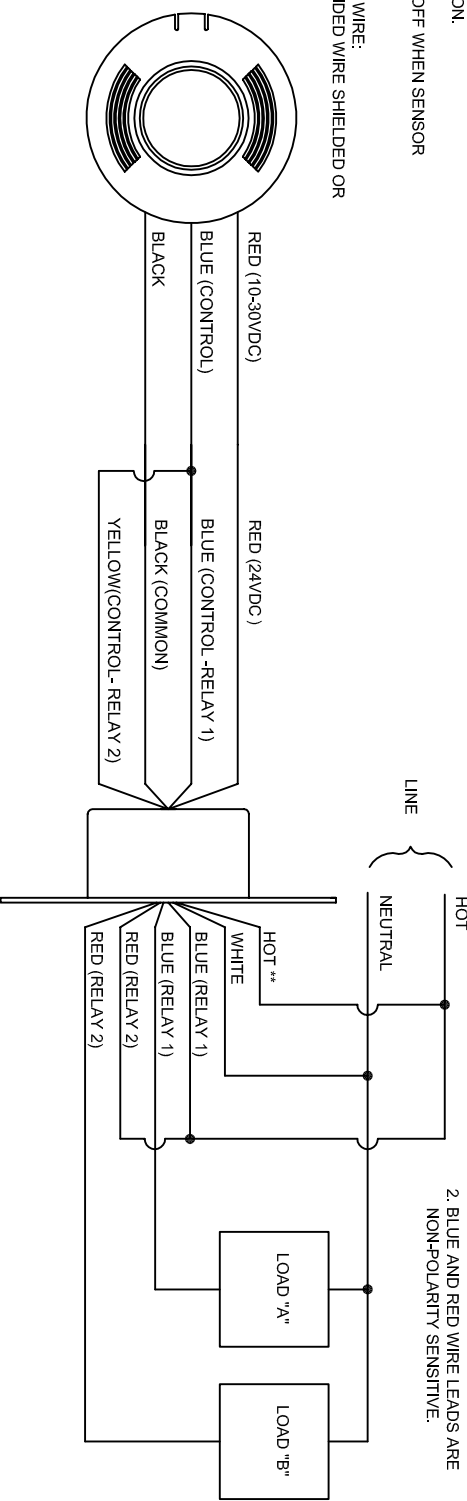

****USE BLACK LEAD FOR 120VAC.
USE ORANGE LEAD FOR 277VAC.
CAP UNUSED LEAD.**

NOTES

1. SPD20-MV-NO SWITCHPACK SHOWN, 120/277VAC 20AMP RATING PER RELAY.
2. BLUE AND RED WIRE LEADS ARE NON-POLARITY SENSITIVE.

NOTES:

1. SENSOR TYPE INCLUDE OAC-P-0500, OAC-P-1500, OAC-U-0501, OAC-U-1000, OAC-U-2000, OAC-DT-0501, OAC-DT-1000, OAC-DT-2000.
2. SPD20-MV-NO SWITCHPACK SHOWN. REFER TO CUT SHEETS AND/OR INSTALLATION INSTRUCTIONS FOR OTHER GREENGATE SWITCHPACK WIRING.



COOPER Controls

Tel: 1-800-553-3879
Fax: 1-800-954-7016
Add: 203 Cooper Circle
Peachtree City, GA 30269, USA
ControlsSales@cooperindustries.com
www.coopercontrol.com

PROJECT	CEILING SENSOR WIRING DIAGRAM	DRAWN BY	CHECKED BY	APPROVED BY
TITLE	SINGLE SENSOR AUTO ON /OFF	DATE	CHKBY	APPLY
		05-29-2013		
		DWG NO.		REV.
		CI-1D1-1-0000-000		A