



HALO[®]

SLD Series
Surface Mount LED Downlight

SLD Surface LED Downlight Luminaire



SLD6



SLD4


WaveStream™ LED
Taking Control of Light.

Features

- 4" and 6" ultra-low profile surface mounting
- WaveStream™ LED Technology
 - Downlight cone-of-light performance
 - AccuAim™ optics for directional control
- 4" SLD4 and 6" SLD6 - 600 Series
 - Lumens: up to 800
 - Wattage: 12.2W (13.2W SLD6 90CRI)
 - Voltage: 120V, 50/60 Hz
- 6" SLD6 - 1200 Series
 - Lumens: up to 1215
 - Wattage: 14.8W
 - Voltage: 120V, 50/60 Hz
- 6" SLD6 - 1200 Series UNV
 - Lumens: up to 1215
 - Wattage: 14.8W
 - Voltage: 120V-277V, 50/60 Hz
- 2700K, 3000K, 3500K, and 4000K CCT
- 80 CRI and 90 CRI options
- Installs in many 3-1/2" and 4" ceiling junction boxes
- Retrofits 4", 5", or 6" recessed downlight housings
- Dimmable to 5% with many 120V leading-edge and trailing-edge phase control dimmers
- Universal voltage also dimmable to 10% with many 0-10V DC low voltage dimmers

Innovation you can rely on™

Halo **SLD Series** Surface LED Downlight luminaires incorporate WaveStream™ LED technology to create an ultra-low profile, surface-mounting luminaire with the performance and look of traditional downlights. The SLD Series 4" and 6" luminaires are designed for installation in many 3-1/2" and 4" electrical junction boxes, and may be retrofit in 4", 5", or 6" aperture IC and Non-IC recessed housings. A dedicated LED wiring connector meets high-efficacy code requirements when in recessed downlight housings and prevents substitution of lower efficacy sources. Perfect for residential or commercial installations and ideal for closets, storage areas, attics and basements. For closets, compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5). The SLD Series offers unparalleled design freedom with mainstream value.



- cULus Listed for Halo housings
- UL Classified for other housings
- Damp Location Listed for walls
- Wet Location Listed for showers and outdoor protected ceilings
- Plug-in LED connector for easy installation
 - Supply wire adapter connection, for junction box wiring*
 - Screwbase adapter for recessed housing retrofit**



*LED connector on SLD meets CA Title 24
 ** Retrofit only - not for CA Title 24

Compliances

90 CRI



Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Title 20 Appliance Efficiency Database.

80 CRI



Can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as a LED Luminaire.



Refer to ENERGY STAR® Certified Products List.

SLD4 4" LED Surface Downlight Luminaire



SLD4 Designer Trims (Order Separately)





SLD4TRMSN
Satin Nickel



SLD4TRMTBZ
Tuscan Bronze



SLD4TRMWH
White (Paintable)



| SLD4 Energy Data | 80 CRI | 90 CRI |
|--------------------|-------------|-------------|
| Lumens (4000K) | 800 | 710 |
| Input Voltage | 120V | 120V |
| Input Frequency | 50/60 Hz | 50/60 Hz |
| Input Current | 0.10 A | 0.10 A |
| Input Power | 12.2 W | 12 W |
| Efficiency (4000K) | 66 lm/W | 59 lm/W |
| THD | ≤ 20% | ≤ 20% |
| Power Factor | ≥ 0.90 | ≥ 0.90 |
| T Ambient | -30 - +40°C | -30 - +40°C |
| Sound Rating | Class A | Class A |

OVER **\$460^Δ**
SAVINGS

LASTS **22^{*}**
YEARS

* Based on average six hours use per day.
Δ Savings are over the life of the Halo SLD4 luminaire.
Energy savings: \$367
Replacement lamp savings: \$95
Savings based on \$0.155 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 60W PAR16 Halogen lamp lumen equivalent.

SLD6 6" LED Surface Downlight Luminaire



SLD6 Designer Trims (Order Separately)





SLD6TRMSN
Satin Nickel



SLD6TRMTBZ
Tuscan Bronze



SLD6TRMWH
White (Paintable)

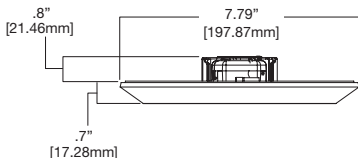

| SLD6 Energy Data | 600 Series | | 1200 Series | |
|--------------------|-------------|-------------|-------------|-------------|
| | 80 CRI | 90 CRI | 80 CRI | 90 CRI |
| Lumens (4000K) | 800 | 780 | 1215 | 1000 |
| Input Voltage | 120V | 120V | 120V | 120V |
| Input Frequency | 50/60 Hz | 50/60 Hz | 50/60 Hz | 50/60 Hz |
| Input Current | 0.10 A | 0.11 A | 0.12 A | 0.12 A |
| Input Power | 12.2 W | 13.2 W | 14.8 W | 14.8 W |
| Efficiency (4000K) | 66 lm/W | 59 lm/W | 82 lm/W | 68 lm/W |
| THD | ≤ 20% | ≤ 20% | ≤ 20% | ≤ 20% |
| Power Factor | ≥ 0.90 | ≥ 0.90 | ≥ 0.90 | ≥ 0.90 |
| T Ambient | -30 - +40°C | -30 - +40°C | -30 - +40°C | -30 - +40°C |
| Sound Rating | Class A | Class A | Class A | Class A |

OVER **\$475****
SAVINGS

LASTS **22***
YEARS

* Based on average six hours use per day.

** Savings are over the life of the Halo SLD6-600 Series luminaire.

Energy savings: \$406

Replacement lamp savings: \$77

Savings based on \$0.155 per kilowatt hour, average six hours use per day, 50,000 hours of lamp usage, and 65W BR30 lamp lumen equivalent.

SLD Designer Trim Rings

SLD trims provide the ultimate in design freedom to match décor and interior fittings in a space with an offering of satin nickel and tuscan bronze plated trims, plus a white trim that may be field painted prior to installation to an alternate color choice.



**White
(Paintable)**

Satin Nickel

**Tuscan
Bronze**



The versatile SLD trims are optional accessories that snap over the SLD. Note that use of the pre-installed thin film tape on the back side of the trim is required to secure the trim and prevent rotation when installing the SLD unit.


Junction Box Accessories

Spacer Extension Ring

The spacer extension ring adds 15/16" depth when the SLD driver cannot fit into a junction box due to excess wire fill or other obstruction. The spacer extension ring is also a problem solver for installations with shallow pancake boxes or plaster rings.



SLD4EXT
4" Surface LED Space Ring

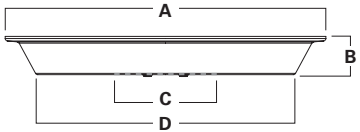


| | A | B | C | D |
|---------|-------|--------|-------|-------|
| SLD4EXT | 7.75" | 0.925" | 3.88" | 6.25" |
| SLD6EXT | 9.5" | 0.925" | 3.88" | 8" |




SLD6EXT
6" Surface LED Spacer Ring


Standard J-box



Standard J-box with plaster ring



Shallow J-box (pancake)



Surface Box Adapter


The surface box adapter allows the user to install the SLD to a junction box that is mounted flat on a ceiling or beam surface (not recessed in the ceiling).



SLD4RAD
4" SLD Round Surface J-box Adapter
For 4" round and octagon junction boxes.




SLD6RAD
6" SLD Round Surface J-box Adapter
For 4" round, octagon, and square junction boxes.
(*use SLD6SADPLT for square J-box)




***SLD6SADPLT**
6" SLD Square Surface
J-box Adapter Plate
(use with SLD6RAD)

Concrete

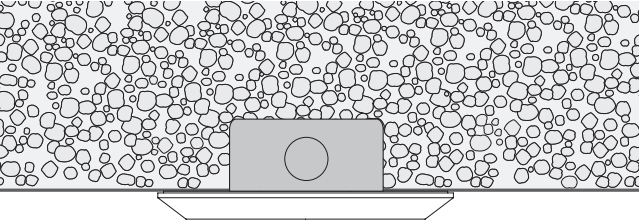


Fire-rated

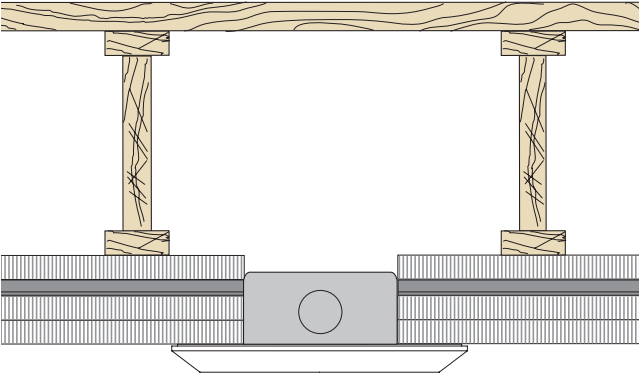


Shallow plenum?
No problem.



Insulation - batting or spray foam

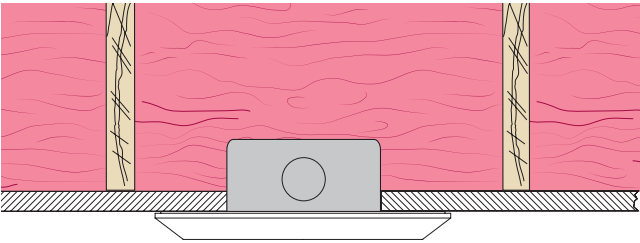


Framing

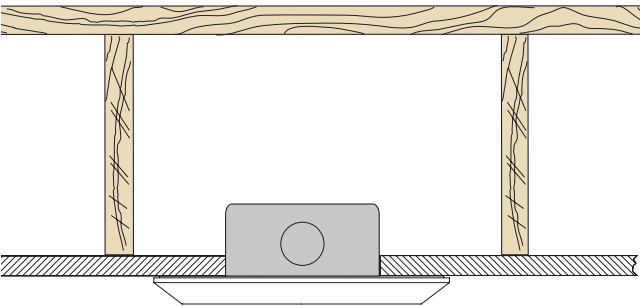

Junction box mounting applications are generalized for illustrative concept only. These are not for construction or specification. Refer to appropriate professional and code authority for specific box and installation requirements.

The perfect solution where there is no plenum space for a recessed downlight.

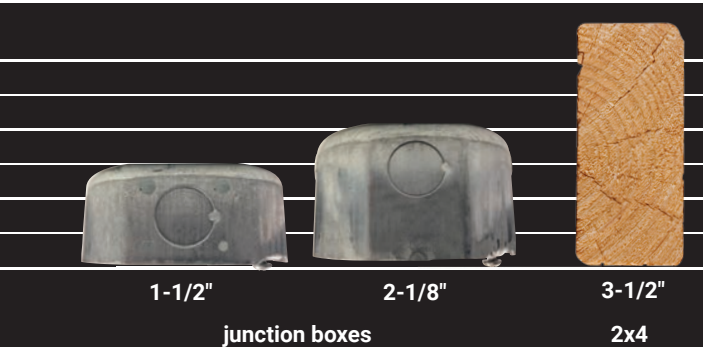


Junction Box Mounting Ceiling or Wall

SLD6 Junction Box Installation

Compatible Junction Box (by others)

Junction Box Bracket

Supply Wire Adapter

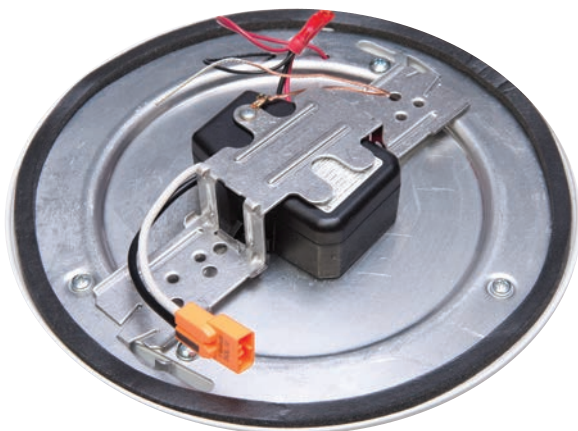

SLD6 with junction box bracket installed.

Junction Box Mounting Summary

1. Install junction box bracket.
2. Unplug supply wire adapter from SLD. Connect black and white wires from the supply wire adapter to house wiring (black to black and white to white).
3. Locate the supply wire adapter behind the junction box bracket.
4. Plug matching orange LED connector from supply wire adapter to SLD.
5. Align two bracket tabs with slots on back of SLD fixture.
6. Turn clockwise to lock in place.


Note that this is only a summary. Read and follow the instructions included with the product for full details.

Compatible Junction
Box (by others)

SLD4 Junction Box Installation

Junction Box Bracket


Supply Wire
Adapter

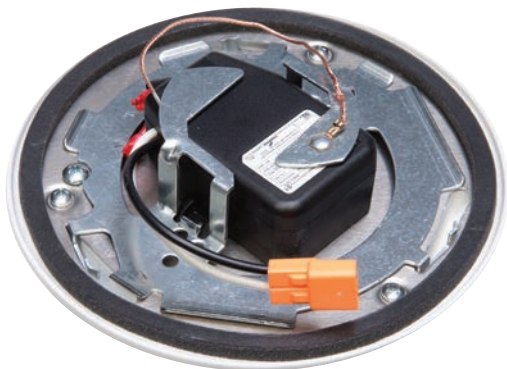


SLD4 with junction box bracket installed.

Slot-N-Lock™

Halo SLD proprietary Slot-N-Lock quick
installation system with mounting
bracket.

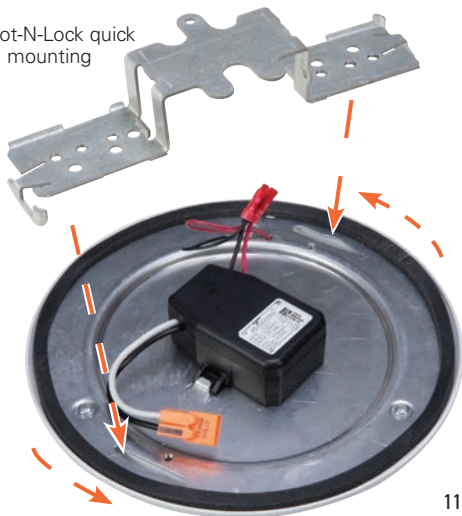

Compatible Junction Boxes*

| | | SLD4 | SLD6 | SLD4RAD adapter | SLD6RAD adapter | SLD6SADPLT adapter |
|--|---|------|------|--------------------|--------------------|-----------------------|
|  | Octagon - steel light fixture / fan box | | | | | |
| | 4" x 2-1/8" | ✓ | ✓ | ✓ | ✓ | |
| | 4" x 1-1/2" | ✓ | ✓ | ✓ | ✓ | |
|  | Square - steel deep box | | | | | |
| | 4" x 4" x 2-1/8" | | ✓ | | | ✓ |
| | 4" x 4" x 1-1/2" | | ✓ | | | ✓ |
|  | Round - new work fixture box (plastic) | | | | | |
| | 4" diameter x 2-3/16" | ✓ | ✓ | ✓ | ✓ | |
| | 3-1/2" diameter x 2-3/4" | ✓ | ✓ | ✓ | | |
|  | Round - old work fixture box (plastic) | | | | | |
| | 4-1/4" flange x 2-5/8", 3-1/2" I.D. | ✓ | ✓ | ✓ | | |
|  | Round - new work fixture box (plastic) with bar hanger | | | | | |
| | 4" diameter x 2-3/16" | ✓ | ✓ | ✓ | ✓ | |
|  | Round surface mount | | | | | |
| | 4" diameter x 1-1/2" | △ | △ | ✓ | ✓ | |
|  | TP316 - Cooper Lighting Solutions' Crouse-Hinds junction box for non-metallic cable | | | | | |
| | 4" x 2-1/8" | ✓ | ✓ | ✓ | ✓ | |
|  | TP317 - Cooper Lighting Solutions' Crouse-Hinds junction box for metal clad cable | | | | | |
| | 4" x 2-1/8" | ✓ | ✓ | ✓ | ✓ | |

△ when used with SLD4RAD (SLD4) or SLD6RAD (SLD6)

*This is a representative list of compatible junction boxes only. Information contained in this literature about other manufacturers' products is from published information made available by the manufacturer and is deemed to be reliable, but has not been verified. Cooper Lighting Solutions makes no specific recommendation on product selection and there are no warranties of performance or compatibility implied. Installer must determine that site conditions are suitable to allow proper installation of the SLD mounting bracket in the box.

Note: SLD6-1200-UNV is compatible with 4"x4" square junction boxes. Compatibility with other junction boxes requires SLD6EXT. See spec sheet for details.

Recessed Housing Mounting

Retrofits 4", 5", or 6" recessed housings.

1. Install screwbase adapter to fixture socket. (LED housings skip Step 1)
2. Attach torsion springs or friction clips to SLD following the instructions included with the SLD.
3. Install SLD into recessed can.

Note that this is only a summary. Read the instructions included with the product for full details.



SLD4 Series Friction Clip Installation



4-inch friction clip

SLD6 Series Friction Clip Installation



6-inch friction clip position



5-inch friction clip position

SLD6 Series Torsion Spring Installation



6-inch torsion spring position



5-inch torsion spring position

Ordering Information

4" SLD4

Sample Number: **SLD405927WH + SLD4TRMSN**

Junction Box Installation: Order junction box separately, as supplied by others, to complete installation.

Recessed Installation: Order Halo recessed housing separately to complete installation.

| Models | Color Rendering Index (CRI) | Color Temperature (CCT) | Finish | |
|--|--|--|-------------------|------------------------------|
| SLD405 = 4" Surface LED Downlight, 120V with recessed retrofit and junction box hardware kits | 8 = 80 CRI 9 = 90 CRI | 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K | WH = White | |
| "JB" Models | Color Rendering Index (CRI) | Color Temperature (CCT) | Finish | JB |
| SLD405 = 4" Surface LED Downlight, 120V with junction box hardware kit only | 8 = 80 CRI 9 = 90 CRI | 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K | WH = White | JB = Junction Box Kit |

Accessories (Order Separately)

| |
|--|
| <u>Designer Trims:</u> fit over the SLD4 for a designer finish, 6" O.D. SLD4TRMSN = 4" SLD Satin Nickel Trim Ring SLD4TRMTBZ = 4" SLD Tuscan Bronze Trim Ring SLD4TRMWH = 4" SLD White Paintable Trim Ring |
| <u>J-box Spacer Extension Ring:</u> add 15/16" depth when SLD driver cannot fit into installed junction box, 7.75" O.D. SLD4EXT = 4" Surface LED J-box Extender |
| <u>RAD Adapters:</u> when junction box is mounted flat on a ceiling or beam surface SLD4RAD = 4" SLD Round Surface J-box Adapter (compatible with 4" round and octagon junction boxes) |
| <u>Spare Parts</u> SLD4ACCKIT = 4" Accessory Parts Replacement Kit (screwbase adapter, and friction blades) SLD4BRKT = 4" Junction Box Bracket and Screws |



6" SLD6 - 600 Series

Sample Number: **SLD606927WH + SLD6TRMSN**

Junction Box Installation: Order junction box separately, as supplied by others, to complete installation.

Recessed Installation: Order Halo recessed housing separately to complete installation.

| Models | Color Rendering Index (CRI) | Color Temperature (CCT) | Finish | |
|--|--|--|-------------------|------------------------------|
| SLD606 = 6" Surface LED Downlight, 120V, 600 Series with recessed retrofit and junction box hardware kits | 8 = 80 CRI 9 = 90 CRI | 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K | WH = White | |
| "JB" Models | Color Rendering Index (CRI) | Color Temperature (CCT) | Finish | JB |
| SLD606 = 6" Surface LED Downlight, 120V, 600 Series with junction box hardware kit only | 8 = 80 CRI 9 = 90 CRI | 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K | WH = White | JB = Junction Box Kit |

Accessories (Order Separately)

| |
|---|
| <u>Designer Trims:</u> fit over the SLD6 for a designer finish, 7.79" O.D. SLD6TRMSN = 6" SLD Satin Nickel Trim Ring SLD6TRMTBZ = 6" SLD Tuscan Bronze Trim Ring SLD6TRMWH = 6" SLD White Paintable Trim Ring |
| <u>J-box Spacer Extension Ring:</u> add 15/16" depth when SLD driver cannot fit into installed junction box, 9.5" O.D. SLD6EXT = 6" Surface LED J-box Extender |
| <u>RAD Adapters:</u> when junction box is mounted flat on a ceiling or beam surface SLD6RAD = 6" SLD Round Surface J-box Adapter (compatible with 4" round, octagon, and square junction boxes) SLD6SADPLT = 6" SLD Square Surface J-box Adapter Plate (use with SLD6RAD) |
| <u>Spare Parts</u> SLD6ACCKIT = 6" Accessory Parts Replacement Kit (screwbase adapter, torsion springs, friction blades) SLD6BRKT = 6" Junction Box Bracket and Screws |



Ordering Information

6" SLD6 - 1200 Series

Sample Number: **SLD612927WH + SLD6TRMSN**

Junction Box Installation: Order junction box separately, as supplied by others, to complete installation.

Recessed Installation: Order Halo recessed housing separately to complete installation.

| Models | Color Rendering Index (CRI) | Color Temperature (CCT) | Finish |
|---|--|--|-------------------|
| SLD612 = 6" Surface LED Downlight, 120V, 1200 Series with recessed retrofit and junction box hardware kits | 8 = 80 CRI 9 = 90 CRI | 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K | WH = White |

Accessories (Order Separately)

Designer Trims: fit over the SLD6 for a designer finish, 7.79" O.D.

SLD6TRMSN= 6" SLD Satin Nickel Trim Ring

SLD6TRMTBZ= 6" SLD Tuscan Bronze Trim Ring

SLD6TRMWH= 6" SLD White Paintable Trim Ring

J-box Spacer Extension Ring: add 15/16" depth when SLD driver cannot fit into installed junction box, 9.5" O.D.

SLD6EXT= 6" Surface LED J-box Extender

RAD Adapters: when junction box is mounted flat on a ceiling or beam surface

SLD6RAD= 6" SLD Round Surface J-box Adapter (compatible with 4" round, octagon, and square junction boxes)

SLD6SADPLT= 6" SLD Square Surface J-box Adapter Plate (use with SLD6RAD)

Spare Parts

SLD6ACCKIT= 6" Accessory Parts Replacement Kit (screwbase adapter, torsion springs, friction blades)

SLD6BRKT= 6" Junction Box Bracket and Screws

6" SLD6 - 1200 Series - Universal Voltage

Sample Number: **SLD612830WHUNVJB + SLD6TRMSN**

Junction Box Installation: Order junction box separately, as supplied by others, to complete installation.

Recessed Installation: Order Halo recessed housing separately to complete installation.

| Models | Color Rendering Index (CRI) | Color Temperature (CCT) | Finish |
|---|--|--|-------------------|
| SLD612 = 6" Surface LED Downlight, 1200 Series | 8 = 80 CRI 9 = 90 CRI | 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K | WH = White |

Voltage

UNV= Universal Voltage 120V-277V

Junction Box

JB= Junction Box Kit

Accessories (Order Separately)

Designer Trims: fit over the SLD6 for a designer finish, 7.79" O.D.

SLD6TRMSN= 6" SLD Satin Nickel Trim Ring

SLD6TRMTBZ= 6" SLD Tuscan Bronze Trim Ring

SLD6TRMWH= 6" SLD White Paintable Trim Ring

J-box Spacer Extension Ring: add 15/16" depth when SLD driver cannot fit into installed junction box, 9.5" O.D.

SLD6EXT= 6" Surface LED J-box Extender

RAD Adapters: when junction box is mounted flat on a ceiling or beam surface

SLD6RAD= 6" SLD Round Surface J-box Adapter (compatible with 4" round, octagon, and square junction boxes)

SLD6SADPLT= 6" SLD Square Surface J-box Adapter Plate (use with SLD6RAD)

Spare Parts

SLD6ACCKIT= 6" Accessory Parts Replacement Kit (screwbase adapter, torsion springs, friction blades)

SLD6BRKT= 6" Junction Box Bracket and Screws

Housing Compatibility

4" Housings - Halo and All-Pro UL Listed Compatibility

Recessed Can Size Catalog Number

Compatible Halo LED Housings with LED Luminaire High-efficacy Compliant Connector (Meets CA Title 24 requirements)

| | |
|-----------|---------------------|
| 4" | H995ICAT, H995RICAT |
|-----------|---------------------|

Compatible Halo Incandescent E26 Screwbase Housings

| | |
|-----------|--------------------------|
| 4" | H99ICAT, H99TAT, H99RTAT |
|-----------|--------------------------|

Compatible All-Pro Incandescent E26 Screwbase Housings

| | |
|-----------|----------------------------------|
| 4" | EI400ATSB, ET400ATSB, ET400RATSB |
|-----------|----------------------------------|

6" Housings - Halo and All-Pro UL Listed Compatibility

Recessed Can Size Catalog Number

Compatible Halo LED Housings with LED Luminaire High-efficacy Compliant Connector (Meets CA Title 24 requirements)

| | |
|-----------|---------------------|
| 5" | H550ICAT, H550RICAT |
|-----------|---------------------|

| | |
|-----------|--|
| 6" | H750ICAT, H750RICAT, H750T, H750RINTD010, H750TCP, H2750ICAT |
|-----------|--|

Halo LED Retrofit Enclosures

| | |
|-----------|---------------------|
| 6" | ML7BXRFK, ML7E26RFK |
|-----------|---------------------|

Compatible Halo Incandescent E26 Screwbase Housings

| | |
|-----------|---|
| 5" | H5ICAT, H5RICAT, H5T, H5RT, H5TM, H25ICAT |
|-----------|---|

| | |
|-----------|---|
| 6" | H7ICAT, H7RICAT, H7ICT, H7RICT, H7ICATNB, H7ICTNB, H7T, H7RT, H7TNB, H7TCP, H7UICAT, H7UICAT, H27ICAT, H27RICAT, H27ICT, H27RICT, H27T, H27RT |
|-----------|---|

Compatible All-Pro Incandescent E26 Screwbase Housings

| | |
|-----------|----------------------------------|
| 5" | EI500AT, EI500RAT, ET500, ET500R |
|-----------|----------------------------------|

| | |
|-----------|---|
| 6" | EI700AT, EI700RAT, EI700, EI700R, EI700ATNB, EI700NB, EI700U, EI700UAT, ET700, ET700R, EI2700AT, EI2700, EI2700R, ET2700, ET2700R |
|-----------|---|

The SLD Series surface LED downlight luminaire is cULus Listed or UL Classified for use with any 4" (SLD4) or 5"/6" (SLD6) diameter recessed housings constructed of steel or aluminum with an internal volume that exceeds 62.3 in³ (SLD4) or 107.9 in³ (SLD6) in addition to those noted above.

Replacement Parts Kits



SLD4ACCKIT

SLD4 Retrofit Kit

SLD4 screwbase adapter, friction blades, ground wire, mounting screws, wire nuts



SLD4BRKT


SLD4 Junction box mounting bracket and mounting screws



SLD6ACCKIT

SLD6 Retrofit Kit

SLD6 screwbase adapter, friction blades, torsion springs, ground wire, mounting screws, wire nuts



SLD6BRKT

SLD6 Junction box mounting bracket and mounting screws



HALOHOME™



HALO Home In-wall Smart Dimmer

HIWMA1BLE40AWH

Controls standard lighting fixtures with dimmer or HALO Home mobile app.

Features include:

- ON/OFF
- Dim
- Group
- Scene
- Schedule




Product and Photometric Data

- Downlight cone-of-light distribution
- Maximum spacing criteria
- Optimized design for general downlighting
- Exceeds 83% of light between 0-60° cone-of-light zone
- ENERGY STAR® and California Title 24 - zonal and efficacy requirements

SLD4

| Cat No. | CRI | CCT | Lumens | Power (W) | LPW |
|------------------|-----|------|--------|-----------|-----|
| SLD405827WH (JB) | 80 | 2700 | 720 | 12.2 | 59 |
| SLD405830WH (JB) | 80 | 3000 | 750 | 12.2 | 61 |
| SLD405835WH (JB) | 80 | 3500 | 780 | 12.2 | 64 |
| SLD405840WH (JB) | 80 | 4000 | 800 | 12.2 | 66 |
| SLD405927WH (JB) | 90 | 2700 | 650 | 12 | 54 |
| SLD405930WH (JB) | 90 | 3000 | 670 | 12 | 56 |
| SLD405935WH (JB) | 90 | 3500 | 690 | 12 | 58 |
| SLD405940WH (JB) | 90 | 4000 | 710 | 12 | 59 |

| SLD405830WH | | |
|-----------------------|----------|----------|
| Luminaire lumens | | 750 |
| Input watts | | 12.2 |
| LER (LPW) | | 61 |
| Spacing Criteria | 0-180 | 1.4 |
| | 90-270 | 1.4 |
| | Diagonal | 1.5 |
| Beam angle (degrees) | | 107 |
| Field angle (degrees) | | 159 |
| Zonal lumen | Lumens | % Lumens |
| 0-30 | 212 | 28% |
| 0-40 | 357 | 48% |
| 0-60 | 623 | 83% |
| 0-90 | 750 | 100% |

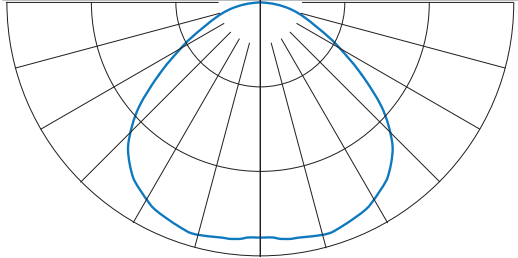




SLD6 - 600 Series

| Cat No. | CRI | CCT | Lumens | Power (W) | LPW |
|------------------|-----|------|--------|-----------|-----|
| SLD606827WH (JB) | 80 | 2700 | 727 | 12.2 | 60 |
| SLD606830WH (JB) | 80 | 3000 | 760 | 12.2 | 62 |
| SLD606835WH (JB) | 80 | 3500 | 780 | 12.2 | 64 |
| SLD606840WH (JB) | 80 | 4000 | 800 | 12.2 | 66 |
| SLD606927WH (JB) | 90 | 2700 | 710 | 13.2 | 54 |
| SLD606930WH (JB) | 90 | 3000 | 735 | 13.2 | 56 |
| SLD606935WH (JB) | 90 | 3500 | 760 | 13.2 | 58 |
| SLD606940WH (JB) | 90 | 4000 | 780 | 13.2 | 59 |

| SLD606830WH | | |
|-----------------------|----------|----------|
| Luminaire lumens | | 760 |
| Input watts | | 12.2 |
| LER (LPW) | | 62 |
| Spacing Criteria | 0-180 | 1.5 |
| | 90-270 | 1.5 |
| | Diagonal | 1.5 |
| Beam angle (degrees) | | 103 |
| Field angle (degrees) | | 159 |
| Zonal lumen | Lumens | % Lumens |
| 0-30 | 215 | 28% |
| 0-40 | 364 | 48% |
| 0-60 | 631 | 83% |
| 0-90 | 760 | 100% |

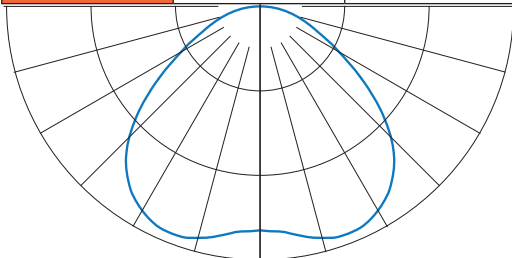


Product and Photometric Data

SLD6 - 1200 Series

| Cat No. | CRI | CCT | Lumens | Power (W) | LPW |
|-------------|-----|------|--------|-----------|-----|
| SLD612827WH | 80 | 2700 | 1100 | 14.8 | 74 |
| SLD612830WH | 80 | 3000 | 1150 | 14.8 | 78 |
| SLD612835WH | 80 | 3500 | 1200 | 14.8 | 81 |
| SLD612840WH | 80 | 4000 | 1215 | 14.8 | 82 |
| SLD612927WH | 90 | 2700 | 880 | 14.8 | 59 |
| SLD612930WH | 90 | 3000 | 925 | 14.8 | 63 |
| SLD612935WH | 90 | 3500 | 965 | 14.8 | 65 |
| SLD612940WH | 90 | 4000 | 1000 | 14.8 | 68 |


| SLD612830WH | | |
|-----------------------|----------|----------|
| Luminaire lumens | | 1150 |
| Input watts | | 14.8 |
| LER (LPW) | | 78 |
| Spacing Criteria | 0-180 | 1.4 |
| | 90-270 | 1.4 |
| | Diagonal | 1.5 |
| Beam angle (degrees) | | 107 |
| Field angle (degrees) | | 159 |
| Zonal lumen | Lumens | % Lumens |
| 0-30 | 320 | 28% |
| 0-40 | 541 | 47% |
| 0-60 | 952 | 83% |
| 0-90 | 1150 | 100% |

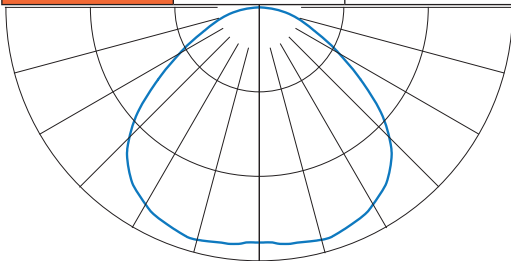

SLD6 - 1200 Series - Universal Voltage

| Cat No. | CRI | CCT | Lumens | Power (W) | LPW |
|------------------|-----|------|--------|-----------|-----|
| SLD612827WHUNVJB | 80 | 2700 | 1100 | 14.8 | 74 |
| SLD612830WHUNVJB | 80 | 3000 | 1150 | 14.8 | 78 |
| SLD612835WHUNVJB | 80 | 3500 | 1200 | 14.8 | 81 |
| SLD612840WHUNVJB | 80 | 4000 | 1215 | 14.8 | 82 |
| SLD612927WHUNVJB | 90 | 2700 | 880 | 14.8 | 59 |
| SLD612930WHUNVJB | 90 | 3000 | 925 | 14.8 | 63 |
| SLD612935WHUNVJB | 90 | 3500 | 965 | 14.8 | 65 |
| SLD612940WHUNVJB | 90 | 4000 | 1000 | 14.8 | 68 |

| SLD612830WHUNVJB | | |
|-----------------------|----------|----------|
| Luminaire lumens | | 1150 |
| Input watts | | 14.8 |
| LER (LPW) | | 78 |
| Spacing Criteria | 0-180 | 1.4 |
| | 90-270 | 1.4 |
| | Diagonal | 1.5 |
| Beam angle (degrees) | | 107 |
| Field angle (degrees) | | 159 |
| Zonal lumen | Lumens | % Lumens |
| 0-30 | 320 | 28% |
| 0-40 | 541 | 47% |
| 0-60 | 952 | 83% |
| 0-90 | 1150 | 100% |

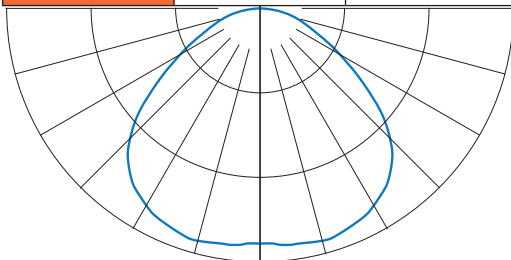

Cooper Lighting Solutions

1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

Lighting Product Lines

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
io
IRIS
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Controls Product Lines

Greengate

Connected Lighting Systems

Fifth Light (Canada Only)
HALO Home
WaveLinx

IoT Platform

Trellix



© 2021 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. BR518015EN
May 2021

Products, specifications and
compliances are subject to
change without notice.

Cooper Lighting Solutions is a
registered trademark.
All other trademarks are property
of their respective owners.

