

| | | | | | |
|-------------|--|-----------|--|------|--|
| Project | | Catalog # | | Type | |
| Prepared by | | Notes | | Date | |



Corelite

Divide - DSI

WaveStream™ LED
Suspended
Direct / Indirect

Typical Applications

Office • Education • Healthcare • Hospitality • Retail

Interactive Menu

- Order Information page 2
- Product Specifications page 2
- Quick-Tab Alignment page 3
- Photometric Data page 3
- Energy and Performance Data page 3
- Control Systems page 4
- Product Warranty

Product Certification




Product Features




Top Product Features

- Leverages our patented WaveStream™ Technology with AccuAim™ optics
- Advanced optical control with optimal illumination
- Multiple lumen packages with efficacies up to 140 lumens per watt
- Modern, ultra-shallow design
- Available in 4', 8', and Continuous runs
- Options to meet Buy American Act requirements

Dimensions and Fixture Lengths

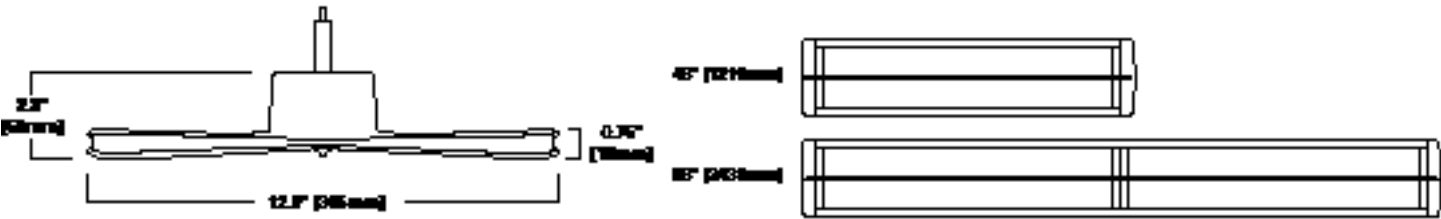

WaveStream Accu-Aim Optic Patterns

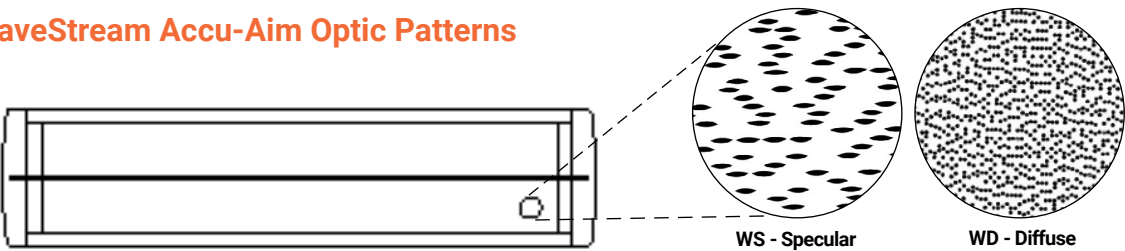

Order Information

SAMPLE ORDER NUMBER: DSI-WS-40L835-1D-UNV-STD-WAA-DC-W-AC48-T1-16

| Domestic Preference | Series | Shielding | Lumen Package Nominal per 4' section | CRI | Color Temperature | Number of Circuits | Additional Circuiting | Input Voltage |
|--|---|---|---|--|--|---|--|---|
| Domestic Preference [Blank]=Standard BAA=Buy American Act | Series DSI=Divide Suspended Direct / Indirect | Shielding WS=WaveStream Specular Optic WD=WaveStream Diffuse Optic | Lumen Package Nominal per 4' section 20L=2000 Lumens, (500 lms/ft) 30L=3000 Lumens, (750 lms/ft) 40L=4000 Lumens, (1,000 lms/ft) 50L=5000 Lumens, (1,250 lms/ft) 60L=6000 Lumens, (1,500 lms/ft) | CRI 8=80+CRI 9=90+CRI | Color Temperature 30=3000K 35=3500K 40=4000K 50=5000K | Number of Circuits 1=Single Circuit | Additional Circuiting D=None (Default Dimming) E=Emergency Circuit S=Secondary Circuit N=Emergency + Secondary Circuit | Input Voltage 120=120V 277=277V UNV=Universal (120V-277V) 347=347V |
| Notes Only product configurations with this designated prefix are built to be compliant with the Buy Amer- ican Act of 1933 (BAA). Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. | | | Notes Refer to performance table on Page 3 for more detail. | Notes Additional lead-time may apply for 930, 935 and 940 configurations. | | Notes Refers to wiring in cross section. | Notes Secondary circuit not available with integrated sensor options. | Notes Integral 347V driver with STD 0-10V option only. Factory supplied 347V remote transformer for all other driver options. |

| Driver / Dimming Options | Integral Sensor | Integral Emergency | Top Cover | Finish | Suspension Length | Ceiling Type | Run Length |
|---|---|---|---|---|---|--|--|
| Driver / Dimming Options | Integral Sensor | Integral Emergency | Top Cover | Finish | Suspension Length | Ceiling Type | Run Length |
| STD =Standard 0-10V (1%-100%) SR =Sensor Ready (1%-100%) SLT =Fifth Light DALI (1%-100%) LH =Lutron HiLume 1% EcoSystems | WAA =WaveLinx Wireless Integrated Sensor WAB =WaveLinx Lite Wireless Integrated Sensor | EL14W =14-watt, 120V-277V Emergency Battery Pack EPC =UL924 Bypass Relay | DC =Dust Cover FC =Frosted Cover SC =Solid Cover (100% Down) (blank) =No Cover | W =White S =Silver B =Black CC =Custom Color | Adj. Cable AC48 =48" AC120 =120" AC240 =240" AC300 =300" AC360 =360" | T1 =15/16" T-Bar T9 =9/16" T-Bar TS =Slotted T-Bar JB =Junction Box /Structure UM =Universal Ceiling Kit (T1, T9, JB) S =Swivel at Cancopy (___=T1, T9, TS or JB) | 4 =4 ft 8 =8 ft XX =Specify Row Length |
| Notes | Notes | Notes | Notes | | Notes | | Notes |
| LH driver option not available in 20L lumen package. | WAA and WAB sensor must be used with "STD" driver. Integrated Sensors combined with Emergency Circuit require one UL924 Bypass Relay per emergency section. SWPD1 has been renamed to WAA, but remains the same sensor. | EPC option used to bypass local control during outage. Must be used in conjunction with UL1008 device (provided by others). | Refer to photometric IES file data for top cover performance. | | White mounting hardware standard; for black mounting hardware, add "-B" after ceiling type. | | Standard row configurations over 8' consist of 4' and 8' luminaires. |

Product Specifications

Construction

- Constructed from extruded aluminum housing
- 2-1/4" x 12" housing
- Die-formed 20 gauge cold rolled steel

End Caps

- Precision engineered 2-piece die cast aluminum alloy
- Attach mechanically to the end of the fixture without exposed fasteners
- End cap adds 2-1/8" at each end

Lengths

- Available in 4 ft and 8ft sections
- Modular design eliminates the need for starter, intermediate, and end of run sections

Finish

- Electrostatically applied polyester powder coat paint
- White, Silver, or Black finish offered as standard
- RAL custom colors are available

Mounting

- Aircraft cable mounts on 4'-0" and 8'-0" on centers
- Fixture is balanced to allow for minimal leveling
- All sections are continuously wired with push-in connectors for fast installation
- Fixtures can be joined for straight continuous runs using Quick-Tab alignment features
- Refer to installation instructions for various ceiling interface details

Shielding / Optics

- Optical grade acrylic embedded with patented Accu-Aim™ micro-optics for optimal distribution, low glare, and high performance
- Specular (WS) or diffuse (WD) optical patterns are available to achieve the right look for any application
- Dust Cover (DC) option is a clear formed polycarbonate for worry free cleaning and protection
- Frosted Cover (FC) option is a frosted formed polycarbonate for worry free cleaning, reduced uplight, and protection
- Solid Cover (SC) option is a high reflectance white powder coat painted steel reflector for 100% downlight

LED and Light Engine

- LED's are available in 3000K, 3500K, 4000K
- CRI options of either ≥80CRI or ≥90CRI
- Lumen output will be affected - please refer to the lumen adjustment factor tables
- TM21 life at 60,000 hours up to L87 and calculated L70 exceeds 256,000 hrs
- Drivers available in 120-277V and 347V

Integrated Controls

- 0-10V dimming to 1% standard
- WaveLinx sensor compatible for IoT capability
- WaveLinx Lite compatible for out-of-the-box functionality

Emergency Options

- Optional 14-watt 120-277V emergency battery illuminates a 4 ft. down-light section
- 90-minute backup period for code compliance
- Test switch/indicator button located on the top side

of the luminaire

- Patented EZ Key prevents accidental discharge of the battery during construction
- For approximate delivered lumens multiply the lumens per watt of the desired fixture by the wattage of the emergency battery pack (100 lm/W x 14 = 1400 lumens)
- The combination of integrated sensor and emergency circuit options require an EPC UL924 bypass relay that disables sensor control of emergency sections when normal power is lost
- UL 924 emergency/generator transfer options available

Weight


- 6.0 lbs. per foot

Compliance

- cULus listed for damp locations, 25°C ambient environments
- RoHS compliant
- Tested to IESNA LM-79 and LM-80
- Stated life per TM21 standards
- Can be used for State of California Title 24 high efficacy luminaire
- DesignLights Consortium™ Qualified and classified for DLC Standard and DLC Premium, refer to www.designlights.org for details

Warranty


- Five year warranty standard
- www.cooperlighting.com/legal

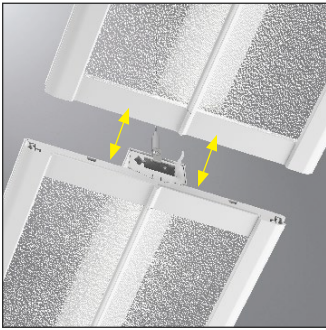

Quick-Tab Alignment

Corelite's patented quick-tab alignment system creates a seamless and simple installation every time. Simply align the tabs into the corresponding slots. The fixture can then hang freely while a single contractor makes the final connections; it all slides back together and is securely fastened in place.

Photometric Data

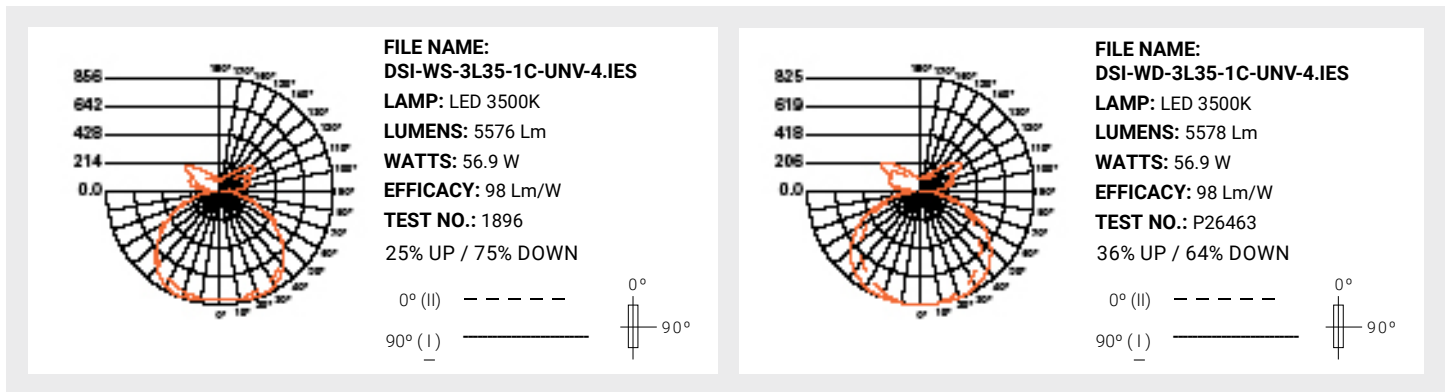[View IES files](#)


Note: Refer to IES files for more product data.

Energy and Performance Data

| Divide Suspended LED Light Level Outputs and Distribution (3500K, 80 CRI) | | | | | | | | |
|---|---------------|------------------|--------|---------|--------|--------------|--------------|--------|
| Series | Lumen Package | Delivered Lumens | | Wattage | | Efficacy LPW | Distribution | |
| | | 4FT | Per FT | 4FT | Per FT | | % Up | % Down |
| DSI-WS | 20L | 2069 | 517 | 15.2 | 3.8 | 136 | 27% | 73% |
| | 30L | 3000 | 750 | 22.4 | 5.6 | 134 | | |
| | 40L | 3995 | 999 | 29.9 | 7.5 | 134 | | |
| | 50L | 5039 | 1260 | 37.8 | 9.5 | 133 | | |
| | 60L | 5968 | 1492 | 46.7 | 11.7 | 128 | | |
| DSI-WD | 20L | 2123 | 531 | 15.2 | 3.8 | 140 | 29% | 71% |
| | 30L | 3079 | 770 | 22.4 | 5.6 | 137 | | |
| | 40L | 4100 | 1025 | 29.9 | 7.5 | 137 | | |
| | 50L | 5172 | 1293 | 37.8 | 9.5 | 137 | | |
| | 60L | 6125 | 1531 | 46.7 | 11.7 | 131 | | |

Lumen Adjustment Factors

| CCT | 80 CRI | 90 CRI |
|-------|--------|--------|
| 3000K | 0.955 | 0.830 |
| 3500K | 1.000 | 0.861 |
| 4000K | 1.012 | 0.883 |

Example Calculation:

WS / 40L / 3500K / 80 CRI

Lumen Output selected = 999 lms/ft

3500K / 90 CRI Desired

Lumen Adjustment Factor = 0.861

Adjusted Lumen Output = 999 lms/ft x 0.861 = 860 lms/ft

Color Data (3500K)

| | | 80CRI |
|----------|----------------|-------|
| TM-30-15 | R _f | 82.3 |
| | R _g | 94.4 |
| CRI/CIE | R _a | 84.0 |
| | R _g | 17.2 |

Lumen Maintenance

| Ambient Temperature | TM-21 Lumen Maintenance (60,000 hours) | Theoretical L70 (Hours) |
|---------------------|--|-------------------------|
| 25°C | >87% | 256,000 |

Control Systems



- WaveLinx Wireless
- WaveLinx Wired
- WaveLinx Lite
- Enlighted
- iLumin Plus
- VividTune



Connected Systems
CLICK HERE

The Divide with Integrated Sensor technology provides automatic energy savings without sacrificing performance. The Divide delivers superior lighting with integrated occupancy and daylighting controls. For standalone and controlled applications, the WaveLinx Lite integral sensor provides out-of-the-box functionality with no gateways required and factory startup is not needed. When more connectivity is required, the WaveLinx Wireless sensor meets modern code and utility requirements, delivers energy and cost savings, while enabling buildings to become smart buildings. The WaveLinx Wireless Connected Lighting System combined with Trellix provides an open IoT platform and infrastructure that connects intelligent sensors leveraging the real-estate of the physical light fixture to solve higher complexity problems to deliver actionable insights through the aggregation of valuable data.

For additional information integrated sensors and connected lighting, please visit [Cooper Lighting Solutions' Connected Lighting Website](#).

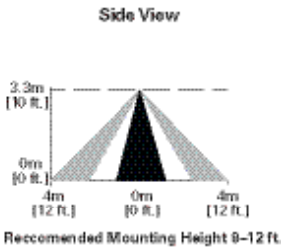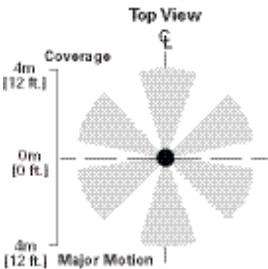

Sensor Integration

Integrated sensors are located in the middle of each 8' section and on the end of 4' sections for individual and continuous runs. Each section can be individually controlled or grouped together with the integrated sensors.

Systems comparison chart

Cooper Lighting Solutions provides many lighting system solutions designed to satisfy code requirements and meet the unique needs of any project.



Standalone



Controlled WaveLinx Lite



Connected WaveLinx Wireless



Enterprise Trellix

| | | | | |
|-------------------|-----|-----------------------------|---------------------|----------------------------|
| Occupancy | Yes | Yes | Yes | Yes |
| Daylighting | Yes | Yes | Yes | Yes |
| Gateways | -- | -- | 1 WAC | 300 WACs |
| Devices | -- | 50 per Area (1400 per site) | 150 per WAC | 45,000 per Core Enterprise |
| Software | -- | WaveLinx Lite Mobile App | WaveLinx Mobile App | Trellix Core |
| Areas | -- | 28 per Site | 16 per WAC | up to 4,800 |
| Zones | -- | 16 per Area | 16 per Area | up to 76,800 |
| Scheduling | -- | -- | Local | Global |
| VividTune™ | -- | -- | Yes | Yes |
| Plug-Load Control | -- | -- | Yes | Yes |
| Integration | -- | -- | -- | BACnet, API |
| Dashboards | -- | -- | -- | Energy, Occupancy |
| Configuration | -- | Installer | Technician | Technician / IT |

SCALABILITY

