HALO
COMMERCIAL

DOWNLIGHTING PRODUCT SELECTION GUIDE

November 2026



HALO
COMMERCIAL

Never break the budget with HALO Commercial's downlighting. We delight customers with the right balance of visual comfort, energy efficiency along with proven and tested products that meet commercial code.

This Product Selection Guide is a straightforward yet powerful tool designed to assist with product comparisons and selection, enabling users to make informed choices based on features, performance, and value.

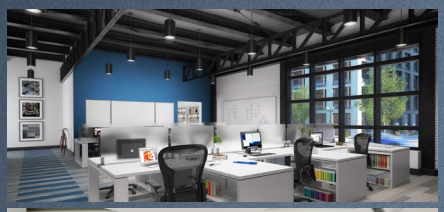






Table of Contents

3 HALO Commercial Product Comparison

4 HCD Kits

5 HCD Series

7 HC Series

9 HCM Series

This Product Selection Guide is a straightforward yet powerful tool designed to assist with product comparisons and selection, enabling users to make informed choices based on features, performance, and value

HALO 70 1956-2026 ANNIVERSARY

HALO Commercial Product Selection Guide








	HCD Kits Downlight & Wall Wash	HCD Series Downlights & Wall Washers	HC Series			HCM Series Multiples
			Downlights & Wall Washers	Retrofit Downlights	Cylinders (HCC)	
Stock	✔	✔				
Specification (Made to Order)		✔	✔	✔	✔	✔
Size / Shape	4" & 6" Round	4", 6", & 8" Round & Square	**Round:** 4", 6", & 8" **Square:** 4" & 6"	4", 6", & 8" Round & Square	4", 6", & 8" Round	4" Round
Installation	Mounting Frame • Install-from-below	Mounting Frame • Install-from-below	Mounting Frame • Install-from-below	Install-from-below	Surface • Wall • Pendant	Mounting Frame • Install-from-below Remodel
Lumens (Range)	Selectable 500 - 2500	Selectable and Fixed Options 500 – 5,000	500 – 8,000	500 – 8,000	500 – 5,000	1,200 – 4,800
LPW (Lumens per Watt) (Max)	Up to 110 LPW	Up to 127 LPW	Up to 110 LPW			Up to 85 LPW
CCT (Correlated Color Temperature)	**SeleCCTable™:** 27/30/35/40/5000K	**SeleCCTable™:** 27/30/35/40/5000K **Fixed:** 2700K • 3000K • 3500K • 4000K • 5000K	**Fixed:** 2700K • 3000K • 3500K • 4000K • 5000K			**Fixed:** 2700K • 3000K • 3500K • 4000K
CRI (Color Rendering Index)	90+	90	90	90	90	90
Dimming	100-1% 0-10V	100–1% 0-10V	100–1% 0-10V	100–1% 0-10V	100–1% 0-10V	100–1% 0-10V 100–1% Phase Cut
Input Voltage	120V-277V	120V-277V • 347V	120V-277V • 347V	120V-277V • 347V	120V-277V • 347V	120V-277V • 120V
Distribution	**Round:** Medium	**Round:** Narrow • Medium • Wide **Square:** Medium	**Round:** Narrow • Medium • Wide **Square:** Medium	Narrow • Medium • Wide	Narrow • Medium • Wide	Spot • Narrow • Flood
Finish	Specular • Haze (Semi-Specular) • Matte White	Specular • Haze (Semi-Specular) • Matte White • Matte Black	Specular • Haze (Semi-Specular) • Matte White • Matte Black	Specular • Haze (Semi-Specular) • Matte White • Matte Black	Specular • Haze (Semi-Specular) • Matte White • Matte Black	Matte White • Matte Black
Chicago Plenum		✔	✔	✔	✔	✔
Wet Location Listed	✔	✔	✔	✔	✔	Damp
Wavelinx Pro WPN • Wavelinx Lite WLN	✔ Accessory	✔	✔	✔	✔	✔
Emergency Battery Backup	✔ Micro Inverter	✔	✔	✔		✔

HCD Kits

4 and 6 - inch Downlights & Wall Washers | New Construction, Remodel, & Retrofit





		HCD Downlighting Kits Our Most Popular - Prepackaged combinations of LED Modules, Drivers and Trims	
Features	**Size**	4"	6"
	Shape and Type	Round Downlights & Wall Washers	Round Downlights & Wall Washers
	Installation	New Construction, Remodel & Retrofit	New Construction, Remodel & Retrofit
	Selectable Lumens	500- 1000 or 1500-2500	500- 1000 or 1500-2500
	LPW (Lumens per Watt)	Up to 110 LPW	Up to 110 LPW
	CCT (Correlated Color Temperature) Field-SeleCCTable™	SeleCCTable™: 27/30/35/40/5000K	SeleCCTable™: 27/30/35/40/5000K
	CRI (Color Rendering Index)	90+	90+
	Driver 100–1% 0-10V Dimming (120V–277V UNV)	✔	✔
Trims & Dims	**Trim Reflector Finishes**	✔ Specular • Haze (Semi-Specular) • Matte White	✔ Specular • Haze (Semi-Specular) • Matte White
	Trim Reflector Distributions Round Medium Beam Angle • Spacing Criteria (SC)	**Round Medium:** 65° Beam - 55° Cutoff - 0.98SC	**Round Medium:** 70° Beam - 55° Cutoff - 1.02SC
	Trim Dimensions (min.) Inner Aperture • Flange O.D.	**Round:** 4.29" Aperture - 5.75" O.D.	**Round:** 6" Aperture - 7.76" O.D.
	Rotatable Lensed Wall Wash Accessory	✔	✔
	Downlights – New Construction Ceiling Cutouts	Round: 5"	Round: 6.375"
	Downlights – Direct mount remodel cutouts	Round: 4.75"	Round: 6.375"
	Chicago Plenum	No (use HCD Modular Series)	No (use HCD Modular Series)
	Wavelinx Wireless Wavelinx Pro WPN • Wavelinx Lite WLN	Field Installed	Field Installed
	Emergency Battery Backup Options	Use Micro Inverter Accessories	Use Micro Inverter Accessories





All values are nominal, field results may vary.






		Complete Modular Downlighting System Any LED Module will fit any size/shape/distribution of HCD Trim Reflector																						
Features	**Size**	4"											6"											
	Shape and Type	Round & Square Downlights & Wall Washers											Round & Square Downlights & Wall Washers											
	Installation	New Construction, Remodel, & Retrofit											New Construction, Remodel, & Retrofit											
	Fixed or Field-Selectable Lumens	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000
	LPW (Lumens per Watt)	116	115	112	113	111	108	116	114	111	106	106	116	115	112	113	111	108	116	114	111	106	106
	CCT (Correlated Color Temperature) Field-SeleCCTable™ • Fixed Color Temperatures	**SeleCCTable™:** 27/30/35/40/5000K **Fixed:** 2700K • 3000K • 3500K • 4000K • 5000K											**SeleCCTable™:** 27/30/35/40/5000K **Fixed:** 2700K • 3000K • 3500K • 4000K • 5000K											
	CRI (Color Rendering Index)	90											90											
	Driver 100–1% 0-10V Dimming (120V–277V UNV)	✔											✔											
Trims & Dims	**Trims Reflector Finishes** Specular • Haze (Semi-Specular) • Matte White • Matte Black	✔ (Round Dead Front Trim: Up to 3000 lm)											✔ (Round Dead Front Trim: Up to 2000 lm)											
	Trim Reflector Distributions **Round:** Narrow • Medium • Wide **Square:** Medium Beam Angle • Cutoff • Spacing Criteria (SC)	**Round** **Narrow:** 61° Beam • 50° Cutoff • 0.92 SC **Medium:** 65° Beam • 55° Cutoff • 0.98 SC **Wide:** 85° Beam • 65°+ Cutoff • 1.15 SC **Square** **Medium:** 65° Beam • 55° Cutoff • 1.05 SC												**Round** **Narrow:** 57° Beam • 50° Cutoff • 0.82 SC **Medium:** 70° Beam • 55° Cutoff • 1.02 SC **Wide:** 85° Beam • 65°+ Cutoff • 1.12 SC **Square** **Medium:** 70° Beam • 55° Cutoff • 1.02 SC											
	Trim Dimensions (Min) Inner Aperture • Flange O.D.	**Round:** 4.29" Aperture • 5.75" O.D. **Square:** 4.37" x 4.37" Aperture • 5.8" x 5.8" O.D.												**Round:** 6" Aperture • 7.76" O.D. **Square:** 6" x 6" Aperture • 7.5" x 7.5" O.D.											
	Rotatable Lensed Wall Wash Accessory Converts any Reflector Trim into a Wall Wash Round • Square	✔											✔											
	Downlights – New Construction Ceiling Cutouts (Use New Construction Mounting Frame)	**Round:** 5" **Square:** 5.125" x 5.125"											**Round:** 6.375" **Square:** 6.75"											
	Downlights – Direct Mount Remodel or Retrofit Ceiling Cutouts (Retention Springs on Reflector Trim)	**Round:** 4.75" **Square:** 5" x 5"											**Round:** 6.375" **Square:** 6.625"											
	Chicago Plenum Module Kits & Mounting Frames	✔											✔											
	Wavelinx Wireless Wavelinx Pro WPN • Wavelinx Lite WLN	✔											✔											
	Emergency Battery Backup Options Remote or Integrated Test Switch (Integral Trim Reflectors Available)	✔											✔											

All values are nominal, field results may vary.
HCD Round & Square Fixtures share the same LED Modules





		Complete Modular Downlighting System Any LED Module will fit any size/shape/distribution of HCD Trim Reflector										
Features	**Size**	8"										
	Shape and Type	Round & Square Downlights & Wall Washers										
	Installation	New Construction, Remodel, & Retrofit										
	Fixed or Field-Selectable Lumens	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000
	LPW (Lumens per Watt)	109	107	104	106	104	101	109	106	104	99	99
	CCT (Correlated Color Temperature) Field-SeleCCTable™ • Fixed Color Temperatures	**SeleCCTable™:** 27/30/35/40/5000K **Fixed:** 2700K • 3000K • 3500K • 4000K • 5000K										
	CRI (Color Rendering Index)	90										
	Driver 100–1% 0-10V Dimming (120V–277V UNV)	✔										
Trims & Dims	**Trims Reflector Finishes** Specular • Haze (Semi-Specular) • Matte White • Matte Black	✔ (Round Dead Front Trim: Up to 4000 lm)										
	Trim Reflector Distributions **Round:** Narrow • Medium • Wide **Square:** Medium Beam Angle • Cutoff • Spacing Criteria (SC)	**Round** **Narrow:** 40° Beam • 50° Cutoff • 0.64 SC **Medium:** 75° Beam • 55° Cutoff • 1.08 SC **Wide:** 105° Beam• 65°+ Cutoff • 1.42 SC **Square** **Medium:** 75° Beam • 55° Cutoff • 1.08 SC										
	Trim Dimensions (Min) Inner Aperture • Flange O.D.	**Round:** 7.78" Aperture • 9.14" O.D. **Square:** 7.88" x 7.88" Aperture • 9.38" x 9.38" O.D.										
	Rotatable Lensed Wall Wash Accessory Converts any Reflector Trim into a Wall Wash Round • Square	✔ Square: N/A										
	Downlights – New Construction Ceiling Cutouts (Use New Construction Mounting Frame)	**Round:** 8.25" **Square:** 8.625" x 8.625"										
	Downlights – Direct Mount Remodel or Retrofit Ceiling Cutouts (Retention Springs on Reflector Trim)	**Round:** 8.25" **Square**: 8.5" x 8.5"										
	Chicago Plenum Module Kits & Mounting Frames	✔										
	Wavelinx Wireless Wavelinx Pro WPN • Wavelinx Lite WLN	✔										
	Emergency Battery Backup Options Remote or Integrated Test Switch (Integral Trim Reflectors Available)	✔										

All values are nominal, field results may vary.
HCD Round & Square Fixtures share the same LED Modules



Features	**Size**	4"													6"											
	Shape and Type	Round & Square Downlights & Wall Washers Round Cylinders													Round & Square Downlights & Wall Washers Round Cylinders											
	Installation	New Construction / Remodel & Retrofit													New Construction / Remodel & Retrofit											
	Fixed Lumens	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000
	LPW (Lumens per Watt)	82	95	100	103	96	91	105	101	95	98	100	101	103	82	95	100	103	96	91	105	101	95	98	100	101	103
	CCT (Correlated Color Temperature) Fixed Color Temperatures	2700K • 3000K • 3500K • 4000K • 5000K													2700K • 3000K • 3500K • 4000K • 5000K											
	CRI (Color Rendering Index)	90													90											
	Driver 100–1% 0-10V Dimming (120V–277V UNV • 347V Canadian Version)	✔													✔											
Trims & Dims	**Trims Reflector Finishes** Specular • Haze (Semi-Specular) • Matte White • Matte Black **Round-only:** Non-conductive Dead Front Trim, Medium Distribution, White Polymer (Non-IC)	✔ (Round Dead Front Trim: Up to 3000 lm)													✔ (Round Dead Front Trim: Up to 2000 lm)											
	Trim Reflector Distributions **Round:** Narrow • Medium • Wide **Square:** Medium *Beam Angle • Cutoff • Spacing Criteria (SC)*	**Round** **Narrow:** 55° Beam • 55° Cutoff • 0.86 SC **Medium:** 62° Beam • 55° Cutoff • 1.00 SC **Wide:** 74° Beam • 60° Cutoff • 1.26 SC **Square** **Medium:** 54° Beam • 50° Cutoff • 0.85 SC													**Round** **Narrow:** 56° Beam • 55° Cutoff • 0.94 SC **Medium:** 59° Beam • 55° Cutoff • 1.08 SC **Wide:** 72° Beam • 60° Cutoff • 1.30 SC **Square** **Medium:** 53° Beam • 50° Cutoff • 0.81 SC											
	Trim Dimensions (Min) Inner Aperture • Flange O.D.	**Round:** 4.41" Aperture • 6.12" O.D. **Square:** 4.50" x 4.50" Aperture • 5.68" x 5.68" O.D.													**Round:** 6.06" Aperture • 7.75" O.D. **Square:** 6.03" x 6.03" Aperture • 7.18" x 7.18" O.D.											
	Rotatable Lensed Wall Wash Accessory Converts any Reflector Trim into a Wall Wash | Round • Square (Fits Downlights & Cylinders)	✔													✔											
Mounting	**Cylinders – Surface, Wall, and Pendant** (Pendants: Aircraft Cable or Stem Mount with Accessory Kits) Finishes: Matte White • Matte Black • Matte Metallic Silver • Dark Bronze	✔ (Up to 4,000 lm)													✔ (Up to 5,000 lm)											
	Downlights – New Construction & Remodel Ceiling Cutouts (Use New Construction Mounting Frame)	**Round:** 5.63" **Square:** 5.25" x 5.25"													**Round:** 7.25" **Square:** 6.75" x 6.75"											
	Downlights – Retrofit Ceiling Cutout Ranges (Nominal)	**Round:** **HC4R 4" Retrofit:** 4-3/4" to 4-7/8" **Square:** N/A													**Round:** **HC56R 5"/6" Retrofit:** 5-7/8" to 6-5/8" **HC6R 6" Retrofit:** 6-5/8" to 7-0" **Square:** N/A											
	Chicago Plenum New Construction / Remodel & Retrofit	✔													✔											
Power & Control	**DLVP** (Distributed Low Voltage System)	✔													✔											
	Wavelinx Wireless Wavelinx Pro WPN • Wavelinx Lite WLN	✔													✔											
	Emergency Battery Backup Options Remote or Integrated Test Switch (Integral Trim Reflectors Available)	✔													✔											

To maximize specification and lighting consistency, both the Round & Square HC Fixtures share the same LED Modules.HCD Round & Square Fixtures share the same LED Modules
All values are nominal, field results may vary.





Features	**Size**	8"													
	Shape and Type	Round Downlights, Wall Washers, & Cylinders													
	Installation	New Construction / Remodel & Retrofit													
	Fixed Lumens	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	8000
	LPW (Lumens per Watt)	82	95	100	103	96	91	105	101	95	98	100	101	103	110
	CCT (Correlated Color Temperature) Fixed Color Temperatures	2700K • 3000K • 3500K • 4000K • 5000K													
	CRI (Color Rendering Index)	90													
	Driver 100–1% 0-10V Dimming (120V–277V UNV • 347V Canadian Version)	✔													
Trims & Dims	**Trims Reflector Finishes** Specular • Haze (Semi-Specular) • Matte White • Matte Black **Round-only:** Non-conductive Dead Front Trim, Medium Distribution, White Polymer (Non-IC)	✔ (Round Dead Front Trim: Up to 4,000 lm)													
	Trim Reflector Distributions **Round:** Narrow • Medium • Wide **Square:** Medium *Beam Angle • Cutoff • Spacing Criteria (SC)*	**Round** **Narrow:** 13° Beam • 55° Cutoff • 0.24 SC **Medium:** 37° Beam • 55° Cutoff • 0.60 SC **Wide:** 72° Beam • 60° Cutoff • 1.10 SC **Square** N/A														
	Trim Dimensions (Min) Inner Aperture • Flange O.D.	**Round:** 8.31" Aperture • 9.75" O.D. **Square** N/A													
	Rotatable Lensed Wall Wash Accessory Converts any Reflector Trim into a Wall Wash | Round • Square (Fits Downlights & Cylinders)	✔ **Square** N/A													
Mounting	**Cylinders – Surface, Wall, and Pendant** (Pendants: Aircraft Cable or Stem Mount with Accessory Kits) Finishes: Matte White • Matte Black • Matte Metallic Silver • Dark Bronze	✔													
	Downlights – New Construction & Remodel Ceiling Cutouts (Use New Construction Mounting Frame)	**Round:** 9.25" **Square:** N/A													
	Downlights – Retrofit Ceiling Cutout Ranges (Nominal)	**Round:** **HC8R 8" Retrofit:** 8-3/4" to 10-5/16", includes 11.3" O.D. Matte White Trim Ring **HCR812 12" Retrofit:** Nominal 12", includes 15-3/8" O.D. Matte White Trim Ring **Square:** N/A														
	Chicago Plenum New Construction / Remodel & Retrofit	✔													
Power & Control	**DLVP** (Distributed Low Voltage System)	✔													
	Wavelinx Wireless Wavelinx Pro WPN • Wavelinx Lite WLN	✔													
	Emergency Battery Backup Options Remote or Integrated Test Switch (Integral Trim Reflectors Available)	✔ **Square:** N/A													

To maximize specification and lighting consistency, both the Round & Square HC Fixtures share the same LED Modules.HCD Round & Square Fixtures share the same LED Modules
All values are nominal, field results may vary.

HCM Multiples Series

4-inch Recessed Adjustable Multiples | New Construction & Remodel



Features	**Size**	4"			
	Multi-Head Count	1-Head	2-Head	3-Head	4-Head
	Fixed Lumens (1200 lm each – Nominal)	1200	2400	3600	4800
	LPW (Lumens per Watt)	2700K • 3000K • 3500K • 4000K • 5000K			
	CCT (Correlated Color Temperature) Fixed Color Temperatures	2700K • 3000K • 3500K • 4000K • 5000K			
	CRI (Color Rendering Index)	90			
	Driver 100–1% 0-10V Dimming (120V–277V UNV) 100–1% Phase Cut Dimming (120V) 100–1% 0-10V Dimming (347V Canadian Version)	✔			
Trims & Dims	**Finishes** Matte White • Matte Black	✔			
	Field-Interchangeable Reflectors (Nominal Beams)	25° Narrow Flood (Included) 15° Spot • 40° Flood (Order Separately)			
	Adjustability – Tilt & Rotation	0–70° Tilt • 365° Rotation			
	Fixture Dimensions Individual Fixture Head: 2.5" diameter • Inner Aperture 5.2" • Flange O.D. 6.9"	5.2" x 5.3" I.D. 6.8" x 6.9" O.D.	5.3" x 10.4" I.D. 6.9" x 12.2" O.D.	5.3" x 15.7" I.D. 6.9" x 17.3" O.D.	5.3" x 20.9" I.D. 6.9" x 22.5" O.D.
Mounting	**New Construction & Remodel Ceiling Cutouts** (Install-from-below)	5.2" x 5.3"	5.2" x 10.4"	5.2" x 15.7"	5.2" x 20.9"
	Chicago Plenum New Construction & Remodel	✔			
Power & Control	**DLVP** (Distributed Low Voltage System)	✔			
	Wavelinx Wireless Wavelinx Pro WPN • Wavelinx Lite WLN	✔			
	Emergency Battery Backup Options Remote Test Switch • Integral Test Switch	Remote • Integral			





All values are nominal, field results may vary.



Lighting Brands
Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
iO
Iris
Lumark
Lumière
McGraw-Edison
Metalux
MWS
NeoRay
Portfolio
PrentaLux
RSA
Shaper
Streetworks
Sure-Lites

Controls Brands
Greengate
Fifth Light
Intelligent Lighting Controls

Connected Lighting Systems and Smart Spaces Platform
WaveLinx
Trellix Infrastructure

SCAN
for more
HALO Commercial
information

COOPER Lighting Solutions
a Signify business

Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2026 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. SA51749025
November 6, 2026 2:00 PM

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.