

Project		Catalog #		Type	
Prepared by		Notes		Date	



Fail-Safe

Vaportite LED

2' Tamper Resistant LED Vaportite

Typical Applications

Parking Garage • Cold Storage • Canopy • Warehouse • Food Processing • Manufacturing • Complex Environments

- Interactive Menu**
- Order Information page 2
 - Photometric Data page 2
 - Product Warranty


Product Certification

Product Features


Top Product Features

- 2ft, 4ft, and 8ft Sealed and Gasketed Tamper Resistant Vaportite
- Lumen packages up to 22K lumens
- High-Performance efficacy up to 150 LPW
- LEDs available in 3500K, 4000K and 5000K at 80 CRI
- Rated for -40c to 35c ambient
- Options to meet Buy American and other domestic preference requirements


Dimensional and Mounting Details

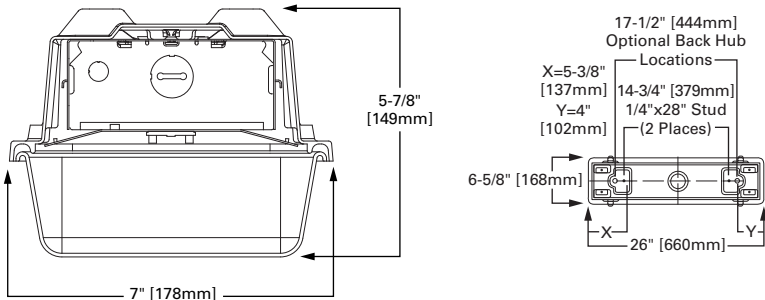

Installation Data



MOUNTING BRACKETS
Furnished
Two per 2' and 4' Unit
Four per 8' Unit




OPTIONAL CHAN HANGING SET
(VT2-CHAIN/SET-U)
Includes 6 ft. of chain, 4 large S-Hooks and 4 small S-Hooks
Order One (1) Kit for each 2' or 4' Fixture
Two (2) Kits Recommended For 8' Fixture

Order Information

SAMPLE ORDER NUMBER: 2VRVT2-LD5-3-DR-UNV-L840-CD1-WL-U

Domestic Preferences	Series	Lamp Type	LED Lumens Output	Lens	Distribution	Voltage	Remote Emergency Enclosure
Domestic Preferences ⁽⁶⁾	Series	Lamp Type	LED Lumens Output	Lens	Distribution	Voltage	Remote Emergency Enclosure
[Blank]=Standard BAA=Buy American Act TAA=Trade Agreements Act	2VRVT2=2' Tamper Resistant Vaportite	LD5=LED 5.0	2=2000 Lumens 3=3000 Lumens 4=4000 Lumens 5=5000 Lumens ⁽²⁾	DR=Internal Prismatic Lens/15% DR High Impact Additive DR100=Internal Prismatic Lens/100% DR High Impact Additive FR50=Frosted Lens/15% DR High Impact Additive ⁽¹⁾	[Blank]=Medium (Standard) W=Wide Distribution	UNV=Universal Voltage 120-277	VT-REM-EL=Emergency Installed, 700 lumens ⁽²⁾
Notes (6) Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements			Notes (3) 2ft, 5000 lumen configuration rated up to 30°C max ambient.	Notes (1) Not available in wide distribution.			Notes (2) EL must specify 120 or 277V only.

Lamps	Driver Type	Label	Options	Packaging	Accessories
Lamps	Driver Type	Label	Options	Packaging	Accessories (order separately) ⁽⁷⁾
L835=3500K, LED L840=4000K, LED L850=5000K, LED LG52=Green 520nm LED LA59=Amber 590nm LED LR63=Red 630nm LED	CD1=1 Dimming Driver	WL=Wet Location Label	SSL=Stainless Steel Latches TH=(2) Top Watertite Hubs TEH=(2) Top and (2) End Watertite Hubs (all Watertite Hubs have 1/2" Conduit Entry) MS=Damp Listed Motion Sensor MSWL20=Wet Listed Motion Sensor, max 20ft mounting height	U=Unit Pack	VT2-Chain/Set-U=Chain Hanging Set. Includes 6 ft. of chain, 4 large S-Hooks and 4 small S-Hooks Order One (1) Kit for each 2' or 4' Fixture VT2-SS-MBK=Stainless Steel Mounting Bracket
					Notes (7) Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.



Product Specifications

Construction

- Rugged and durable construction
- Fiberglass housing is reinforced polyester and self-extinguishing (ASTM-D635-74) plastic
- Full metal fixture liner
- Watertight housing
- 1/2" conduit entry at each end of housing (standard) for continuous feed
- Polyurethane gasketing provides a continuous seamless seal for the diffuser lens
- Four sturdy cam latches clamp diffuser tightly for a positive seal between housing, gasketing and diffuser
- Surface or chain mounting
- Torx (R) Tamperproof Screws to prevent unauthorized access

Electrical

- Long-Life LED system coupled with electrical driver for optimal performance
- LED's available in 3500K, 4000K and 5000K with a CRI ≥ 80
- Projected life is 60,000 hours at 91% lumen output
- Electronic drivers are available for 120-277V applications
- 0-10V dimming control (standard)
- Operating temperature of -40°C to 35°C; Ideal for cold storage environments

Lens

- High-impact diffuser lens
- Internal Prismatic Lens with 15% DR High Impact Additive (DR) or Internal Prismatic Lens with 100%

DR High Impact Additive (DR100)

- Frosted Lens with 15% DR High Impact Additive (FR50) option

Finish

- Housing is permanent pearl gray color


Warranty

- Five-year limited warranty

Compliance


- UL/cUL listed for Wet location
- RoHS compliant
- LED modules comply with IESNA LM-79 and LM-80 standards

Photometric Data



2VRVT2-LD5-4-DR-W-UNV-L840-CD1-WL-U

Electronic Driver
Linear LED 4000K
Spacing criterion: (II) 1.22 x mounting height,
(L) 1.59 x mounting height
Lumens: 3603
Input Watts: 28.9W
Efficacy: 124.7 lm/W
Test Report:
2VRVT2-LD5-4-DR-W-UNV-L840-CD1-WL-U.IES



2VRVT2-LD5-4-DR-UNV-L840-CD1-WL-U

Electronic Driver
Linear LED 4000K
Spacing criterion: (II) 1.21 x mounting height,
(L) 1.23 x mounting height
Lumens: 4075
Input Watts: 28.9W
Efficacy: 141 lm/W
Test Report:
2VRVT2-LD5-4-DR-UNV-L840-CD1-WL-U.IES



View IES files

Energy and Performance Data

Color LED

Catalog Number	Description	Delivered Lumens					Watts	Efficacy				
		Lensing						Lensing				
		DR	DR-W	DR100	DR100-W	FR50		DR	DR-W	DR100	DR100-W	FR50
2VRVT2-LD5-2-XX-UNV-LR63-CD1-WL-U	2ft, Vaportight, 2000 lumens UNV, Red 630nm	354	335	352	332	349	45	8	7	8	7	8
2VRVT2-LD5-2-XX-UNV-LA59-CD1-WL-U	2ft, Vaportight, 2000 lumens UNV, Amber 590nm	619	585	616	582	611	27	23	22	23	22	23
2VRVT2-LD5-2-XX-UNV-LG52-CD1-WL-U	2ft, Vaportight, 2000 lumens UNV, Green 520nm	1770	1673	1761	1662	1746	41	43	40	43	40	42
2VRVT2-LD5-3-XX-UNV-LR63-CD1-WL-U	2ft, Vaportight, 3000 lumens UNV, Red 630nm	396	437	492	435	487	57	7	8	9	8	9
2VRVT2-LD5-3-XX-UNV-LA59-CD1-WL-U	2ft, Vaportight, 3000 lumens UNV, Amber 590nm	692	765	861	761	852	33	21	23	26	23	26
2VRVT2-LD5-3-XX-UNV-LG52-CD1-WL-U	2ft, Vaportight, 3000 lumens UNV, Green 520nm	1978	2187	2460	2174	2434	52	38	42	47	42	47
2VRVT2-LD5-4-XX-UNV-LR63-CD1-WL-U	2ft, Vaportight, 4000 lumens UNV, Red 630nm	652	576	6491	573	642	75	9	8	87	8	9
2VRVT2-LD5-4-XX-UNV-LA59-CD1-WL-U	2ft, Vaportight, 4000 lumens UNV, Amber 590nm	1141	1009	1135	1003	1123	44	26	23	26	23	26
2VRVT2-LD5-4-XX-UNV-LG52-CD1-WL-U	2ft, Vaportight, 4000 lumens UNV, Green 520nm	3260	2882	3243	2866	3210	69	47	42	47	42	47
2VRVT2-LD5-5-XX-UNV-LR63-CD1-WL-U	2ft, Vaportight, 5000 lumens UNV, Red 630nm	828	732	824	728	815	101	8	7	8	7	8
2VRVT2-LD5-5-XX-UNV-LA59-CD1-WL-U	2ft, Vaportight, 5000 lumens UNV, Amber 590nm	1449	1281	1441	1274	1427	60	24	21	24	21	24
2VRVT2-LD5-5-XX-UNV-LG52-CD1-WL-U	2ft, Vaportight, 5000 lumens UNV, Green 520nm	4140	3661	4118	3639	4076	93	45	39	44	39	44

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (Hours)
25°C	> 91%	> 237,000

Input Watts:
2VRVT2-LD5-2 (2,000 lumens)=17W
2VRVT2-LD5-3 (3,000 lumens)=22W
2VRVT2-LD5-4 (4,000 lumens)=29W
2VRVT2-LD5-5 (5,000 lumens)=39W

Shipping Data

Catalog No.	Wt.
2VRVT2-LD5	10 lbs.