


Project		Catalog #		Type	
Prepared by		Notes		Date	

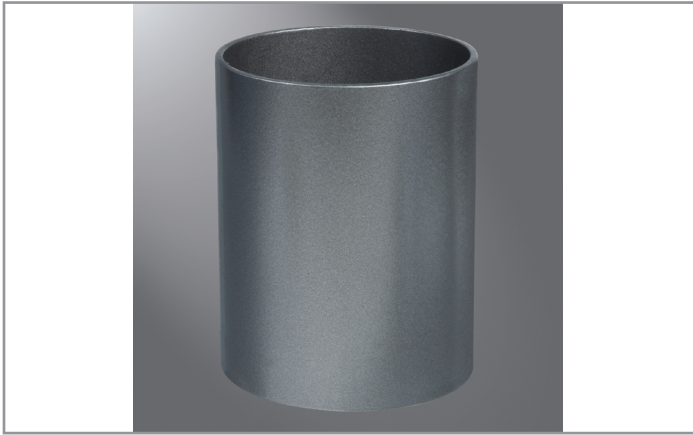

Cooper Poles

Round Straight Aluminum - RSA

Anchor Base Installation

Product Certifications & Features




Interactive Menu

- Ordering Information [page 2](#)
- Design Considerations [page 2](#)
- Effective Projected Area [page 3](#)
- Vibration [page 3](#)
- Maintenance [page 3](#)


Quick Facts

- Straight round shaft 6063-T6 aluminum alloy polished
- Cast aluminum alloy base with aluminum bolt covers
- Anchor bolt per ASTM A576
- 8'-20' mounting heights
- Drilled or tenon (specify)


Dimensional and Mounting Details




See technical information.



Base Type "A" – 4 bolt
(standard with nut covers)

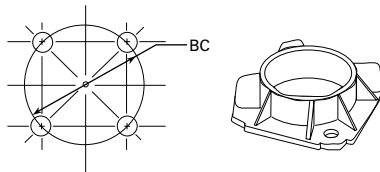

Base Type "N" – 3 bolt
(standard with base cover)



Pole	Anchor Bolt and Template Package	Template Only	Bolt Circle (inches)	Number of Bolts	Anchor Bolt Size (inches)
RSA4TxxN	317RB304	214346D	6-3/4	3	3/4 x 17 x 3
RSA4MxxN	317RB304	214346D	6-3/4	3	3/4 x 17 x 3
RSA5TxxN	317RB305	214354D	7-3/4	3	3/4 x 17 x 3
RSA5MxxN	317RB305	214354D	7-3/4	3	3/4 x 17 x 3
RSA4TxxA	317RB404	227905D	7-1/2	4	3/4 x 17 x 3
RSA4MxxA	317RB404	227905D	7-1/2	4	3/4 x 17 x 3
RSA4TxxA	317RB405	227911D	8-2/3	4	3/4 x 17 x 3
RSA5MxxA	317RB405	227911D	8-2/3	4	3/4 x 17 x 3

Ordering Information

SAMPLE NUMBER: **RSA4T08NAA1V**

Domestic Preference	Product Family	Shaft Size (Inches) ¹	Wall Thickness (Inches)	Mounting Height (Feet)	Base Type	Finish	Mounting Type	Number and Location of Arms
Blank = none BAA = Buy America Act Compliant ⁷ BABA = BABA/IIJA Compliant ⁷	RSA =Round Straight Aluminum	4 =4" 5 =5"	T =0.125" M =0.188"	08 =8' 10 =10' 12 =12' 15 =15' 18 =18' 20 =20'	A =Aluminum (4-Bolt) ² N =Aluminum (3-Bolt)	A =Satin Brushed Aluminum B =Clear Anodized C =Dark Bronze Anodized D =Black Anodized E =Medium Bronze Anodized F =Dark Bronze J =Summit White K =Carbon Bronze L =Dark Platinum R =Hartford Green S =Silver T =Graphite Metallic V =Grey W =White X =Custom Color BK =Black Smooth BT =Black Textured	2 =2-3/8" O.D. Tenon (4" Long) 3 =3-1/2" O.D. Tenon (5" Long) 4 =4" O.D. Tenon (6" Long) 9 =3" O.D. Tenon (4" Long) 6 =2-3/8" O.D. Tenon (6" Long) 7 =4" O.D. Tenon (10" Long) A =Type A Drilling C =Type C Drilling E =Type E Drilling F =Type F Drilling G =Type G Drilling J =Type J Drilling K =Type K Drilling M =Type M Drilling N =Type N Drilling R =Type R Drilling Z =Type Z Drilling	1 =Single 2 =2 at 180° 3 =Triple ³ 4 =4 at 90° 5 =2 at 90° 6 =3 at 90° 7 =2 at 120° X = None
Options (Add as Suffix)								
A =1/2" Tapped Hub ⁴ B =3/4" Tapped Hub ⁴ C =Convenience Outlet ⁵ D =Base Cover for "A" Base E =GFCI Convenience Outlet ⁵ F =Vibration Pad G =Ground Lug H =Additional Hand Hole ⁶ V =Vibration Dampener								
NOTES: 1. All shaft sizes nominal. 2. Base cover not included (order as option). 3. Square poles are 3 at 90°, round poles are 3 at 120°. 4. Tapped Hub is located 5" below the pole top and on the same side of pole as hand hole, unless specified otherwise. 5. Outlet is located 4" above base and on same side of pole as hand hole, unless specified otherwise. For 'C' option, receptacle not included. Provision only. 6. Additional hand hole is located 12" below pole top and 90° from standard hand hole location, unless otherwise specified. 7. Only product configurations with this prefix are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Build America Act (BABA). BABA is the minimum government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual government agencies may have more stringent compliance standards. Please refer to the DOMESTIC PREFERENCES website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.								

Effective Projected Area (At Pole Top)

Mounting	Catalog Number ^{1,2}	Wall Thickness (Inches)	Bolt Circle Diameter (Inches)	Anchor Bolt Projection ³ (Inches)	Shaft Size ³ (Inches)	Anchor Bolt Diameter x Length x Hook (Inches)	Net Weight (Pounds)	Maximum Effective Projected Area (Square Feet) ⁴				Max.Fixture Load - Includes Bracket (Pounds)
								70 mph	80 mph	90 mph	100 mph	
MH			BC	BP	B	D x AB x H						
8	RSA4T08N	0.125	6-3/4	3-1/4	4	3/4 x 17 x 3	20	16.0	11.9	9.1	7.2	100
10	RSA4T10N	0.125	6-3/4	3-1/4	4	3/4 x 17 x 3	24	12.2	8.9	6.6	5.1	100
12	RSA4T12N	0.125	6-3/4	3-1/4	4	3/4 x 17 x 3	27	9.4	6.7	4.8	3.6	100
12	RSA5T12N	0.125	7-3/4	3-1/4	5	3/4 x 17 x 3	33	16.1	11.8	9.1	7.3	100
15	RSA4T15N	0.125	6-3/4	3-1/4	4	3/4 x 17 x 3	33	6.4	4.2	2.8	1.8	100
15	RSA5T15N	0.125	7-3/4	3-1/4	5	3/4 x 17 x 3	40	11.5	8.2	6.2	4.9	100
18	RSA4M18N ⁵	0.188	6-3/4	3-1/4	4	3/4 x 17 x 3	54	7.2	4.8	3.1	2.1	100
18	RSA5M18N	0.188	7-3/4	3-1/4	5	3/4 x 17 x 3	66	13	9.2	7.0	5.5	150
20	RSA5M20N	0.188	7-3/4	3-1/4	5	3/4 x 17 x 3	73	10.3	7.1	5.3	4.1	150
8	RSA4T08A	0.125	7-1/2	3-1/4	4	3/4 x 17 x 3	19	12.8	9.4	7.2	5.6	75
10	RSA4T10A	0.125	7-1/2	3-1/4	4	3/4 x 17 x 3	22	9.3	6.7	5	3.8	75
12	RSA4T12A	0.125	7-1/2	3-1/4	4	3/4 x 17 x 3	26	6.9	4.8	3.4	2.4	75
12	RSA5T12A	0.125	8-2/3	3-1/4	5	3/4 x 17 x 3	32	13.8	10	7.7	6.1	100
15	RSA4T15A	0.125	7-1/2	3-1/4	4	3/4 x 17 x 3	33	4.3	2.7	1.5	0.9	100
15	RSA5T15A	0.125	8-2/3	3-1/4	5	3/4 x 17 x 3	41	9.5	6.7	5	3.9	100
18	RSA5M18A	0.188	8-2/3	3-1/4	4	3/4 x 17 x 3	65	10.7	7.5	5.6	4.3	100
20	RSA5M20A	0.188	8-2/3	3-1/4	5	3/4 x 17 x 3	72	8.3	5.6	4.1	3.1	150

Effective Projected Area (18" Above Pole Top)

Mounting	Catalog Number ^{1,2}	Wall Thickness (Inches)	Bolt Circle Diameter (Inches)	Anchor Bolt Projection ³ (Inches)	Shaft Size ³ (Inches)	Anchor Bolt Diameter x Length x Hook (Inches)	Net Weight (Pounds)	Maximum Effective Projected Area (Square Feet) ⁴				Max.Fixture Load - Includes Bracket (Pounds)
								70 mph	80 mph	90 mph	100 mph	
MH			BC	BP	B	D x AB x H						
8	RSA4T08N	0.125	6-3/4	3-1/4	4	3/4 x 17 x 3	20	13.6	10.1	7.7	6.1	100
10	RSA4T10N	0.125	6-3/4	3-1/4	4	3/4 x 17 x 3	24	10.6	7.7	5.8	4.5	100
12	RSA4T12N	0.125	6-3/4	3-1/4	4	3/4 x 17 x 3	27	8.3	5.9	4.3	3.2	100
12	RSA5T12N	0.125	7-3/4	3-1/4	5	3/4 x 17 x 3	33	14.3	10.5	8.1	6.5	100
15	RSA4T15N	0.125	6-3/4	3-1/4	4	3/4 x 17 x 3	33	5.6	3.7	2.4	1.6	100
15	RSA5T15N	0.125	7-3/4	3-1/4	5	3/4 x 17 x 3	40	10.2	7.2	5.5	4.3	100
18	RSA4M18N ⁵	0.188	6-3/4	3-1/4	4	3/4 x 17 x 3	54	6.5	4.3	2.8	1.9	100
18	RSA5M18N	0.188	7-3/4	3-1/4	5	3/4 x 17 x 3	66	11.7	8.3	6.3	5.0	150
20	RSA5M20N	0.188	7-3/4	3-1/4	5	3/4 x 17 x 3	73	9.4	6.5	4.9	3.7	150
8	RSA4T08A	0.125	7-1/2	3-1/4	4	3/4 x 17 x 3	19	12.8	9.4	7.2	5.6	75
10	RSA4T10A	0.125	7-1/2	3-1/4	4	3/4 x 17 x 3	22	9.3	6.7	5	3.8	75
12	RSA4T12A	0.125	7-1/2	3-1/4	4	3/4 x 17 x 3	26	6.9	4.8	3.4	2.4	75
12	RSA5T12A	0.125	8-2/3	3-1/4	5	3/4 x 17 x 3	32	13.8	10	7.7	6.1	100
15	RSA4T15A	0.125	7-1/2	3-1/4	4	3/4 x 17 x 3	33	4.3	2.7	1.5	0.9	100
15	RSA5T15A	0.125	8-2/3	3-1/4	5	3/4 x 17 x 3	41	9.5	6.7	5	3.9	100
18	RSA5M18A	0.188	8-2/3	3-1/4	4	3/4 x 17 x 3	65	10.7	7.5	5.6	4.3	100
20	RSA5M20A	0.188	8-2/3	3-1/4	5	3/4 x 17 x 3	72	8.3	5.6	4.1	3.1	100

NOTES:

1. Catalog number includes pole with hardware kit. Anchor bolts not included. Before installing, make sure proper anchor bolts and templates are obtained.
2. Tenon size or machining for rectangular arms must be specified. Hand hole position relative to drill location.
3. Shaft size, anchor bolts and projections may vary slightly. All dimensions nominal.
4. EPAs based on shaft properties with wind normal to flat. EPAs calculated using base wind velocity as indicated plus 30% gust factor.
5. Factory installed vibration damper. Additional hand hole is located 12" below pole top and 90° from standard hand hole location, unless otherwise specified.

Vibration

Vibrations may cause damage to structures, including poles. Vibrations are unpredictable, and there are many factors and variables that can cause damaging vibrations. Many wind conditions exist that can create damaging vibrations to poles and luminaires, such as constant winds between 10-30 mph. Although all pole types can experience vibration, straight square poles seem to be most prone. Vibration dampers and/or a round tapered design may be used to mitigate damage from vibrations, but there is no guarantee damaging vibrations will be prevented. Vibration dampers are not included with this pole but can be ordered separately. Consult with a professional, and local and federal standards, to ensure this pole is appropriate for the intended purpose and installation location. Refer to Cooper Lighting Solutions' Light Pole White Paper for risk factors and design considerations.

Maintenance

Perform inspections periodically. A prudent inspection schedule would be: one week after installation, one month after installation, yearly after installation, and following any major wind event. During the inspection, check the poles for cracks. If cracks are detected, remedial action is required. Recheck anchor bolt torques and re-tighten according to the recommended torque values. Check for missing covers and pole caps and replace as necessary. Check the pole for corrosion and deterioration of the finish. Should there be corrosion or deterioration, take remedial action to correct.

WARNING: Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to pole white paper WP513001EN for additional support information. Before installing, make sure proper anchor bolts and templates are obtained. The use of unauthorized accessories such as banners, signs, cameras or pennants for which the pole was not designed voids the pole warranty and may result in pole failure causing serious injury or property damage. Information regarding total loading capacity can be supplied upon request. The pole warranty is void unless poles are used and installed as a complete pole and luminaire combination. This warranty specifically excludes failure as the result of a third party act or omission, misuse, unanticipated uses, fatigue failure or similar phenomena resulting from induced vibration, harmonic oscillation or resonance associated with movement of air currents around the product.

Specifications and dimensions subject to change without notice. Consult your lighting representative at Cooper Lighting Solutions or visit www.cooperlighting.com for available options, accessories and ordering information.