

INSTALLATION INSTRUCTIONS

IMPORTANT: READ BEFORE REMOVING FIXTURE FROM CARTON.
RETAIN FOR FUTURE REFERENCE.



SAFETY: This fixture must be wired in accordance with the national electrical code and applicable local codes and ordinance. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section. All work should be done by a qualified electrician.

WARNING: Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.

- **RISK OF ELECTRIC SHOCK** – Disconnect power at fuse or circuit breaker before installing or servicing.
- **RISK OF BURN** – Disconnect power and allow fixture to cool before servicing.
- **RISK OF PERSONAL INJURY** – Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

VISION FLOOD SMALL WALL MOUNT (WM)

Sheet 1 of 1


10/12/21

IMI-468

WARNING: Make certain power is OFF before starting installation or attempting any maintenance.

ACCESSORY INSTALLATION

1. The wall knuckle mount must be attached to a solid, flat, vertical surface.
2. Make sure all power is off.
3. Attach wall plate to mounting surface using (2) 5/16" diameter screws to support fixture (screws by others). Note the position of the sheet metal bracket, the wall plate **MUST** be installed with the sheet metal bracket on top.
4. Attach fixture to top cover using the lock washer and nut provided. Make sure the gasket is in proper location between pivot and top cover **FIG. 1**. Rotate the fixture to its desired position and securely tighten the nut, and then the (2) set screws located in the fixture knuckle.
5. Attach the top cover to the wall plate using the screws provided.
6. Have a qualified electrician make the power connections.
7. Slide the lower access door into place and attach with the screws provided.
8. Seal the outside edge (where the wall knuckle box meets the mounting surface) and the gap between the top cover and lower access door with a weather resistant caulking (by others) to provide a weather resistant seal.



Wall Knuckle

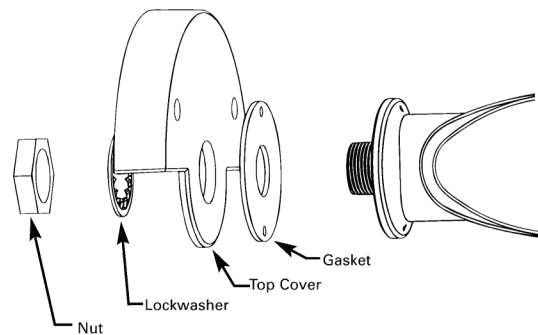
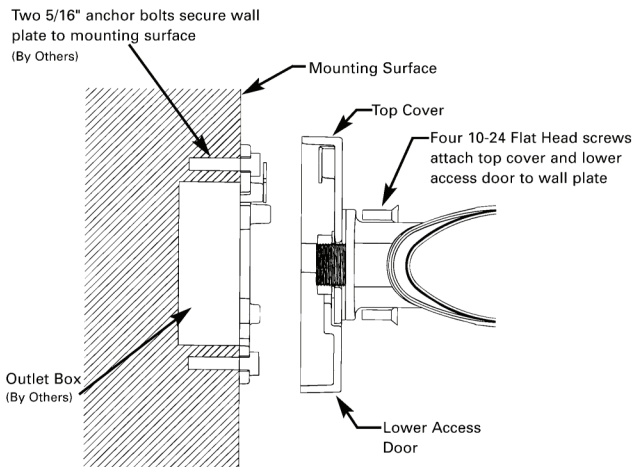
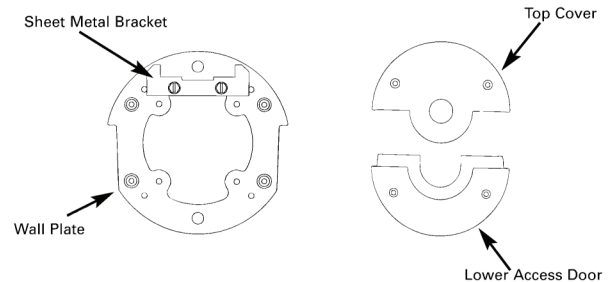


Figure 1

These instructions do not claim to cover all details or variations in the equipment, procedure, or process described, nor to provide directions for meeting every possible contingency during installation, operation or maintenance. When additional information is desired to satisfy a problem not covered sufficiently for user's purpose, please contact your nearest representative. **NOTE:** Specifications and dimensions subject to change without notice.

Customer First Center
1121 Highway 74 South
Peachtree City, GA 30269
P: 770.486.4800 F: 770.486.4801
www.cooperlighting.com

ADH101618

INSTALLATION INSTRUCTIONS

IMPORTANT: READ BEFORE REMOVING FIXTURE FROM CARTON.
RETAIN FOR FUTURE REFERENCE.



SAFETY: This fixture must be wired in accordance with the national electrical code and applicable local codes and ordinance. Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section. All work should be done by a qualified electrician.

WARNING: Make certain power is OFF before starting installation or attempting any maintenance. Risk of fire/electric shock. If not qualified, consult an electrician.

- **RISK OF ELECTRIC SHOCK** – Disconnect power at fuse or circuit breaker before installing or servicing.
- **RISK OF BURN** – Disconnect power and allow fixture to cool before servicing.
- **RISK OF PERSONAL INJURY** – Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

WARNING: Make certain power is OFF before starting installation or attempting any maintenance.

FCC Statement

Declaration of Conformity

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Énoncé de la FCC

Déclaration de conformité

Remarque : Cet équipement a été mis à l'essai et déclaré conforme aux limites établies pour un dispositif numérique de catégorie A en vertu de l'article 15 des règlements de la FCC. Ces limites sont conçues pour assurer une protection raisonnable contre tout brouillage nuisible lorsque l'équipement fonctionne dans un environnement commercial. Cet équipement produit, utilise et peut émettre de l'énergie radioélectrique et, s'il n'est pas installé et utilisé conformément aux instructions, il peut créer des parasites nuisibles aux communications radio. L'utilisation de cet équipement dans une installation résidentielle est susceptible de provoquer des interférences nuisibles, auquel cas l'utilisateur devra corriger ces interférences à ses propres frais.

Declaración de la FCC

Declaración de conformidad

Nota: Se ha probado este equipo y se ha determinado que cumple con los límites para un dispositivo digital de Clase A, de conformidad con la Sección 15 de las normas de la FCC. Estos límites están diseñados para proporcionar una protección razonable contra interferencias perjudiciales cuando el equipo se opera en un entorno comercial. Este equipo genera, utiliza y puede irradiar energía de radiofrecuencia y, si no se instala y utiliza de acuerdo con el manual de instrucciones, puede causar interferencias perjudiciales en las comunicaciones de radio. Es probable que el funcionamiento de este equipo en un área residencial cause interferencia perjudicial, en cuyo caso el usuario deberá corregirla a su propio costo.

Warranties and Limitation of Liability

Please refer to www.cooperlighting.com/legal for our terms and conditions.

Garanties et limitation de responsabilité

Veuillez consulter le site www.cooperlighting.com/legal pour obtenir les conditions générales.

Garantías y Limitación de Responsabilidad

Visite www.cooperlighting.com/legal para conocer nuestros términos y condiciones.

These instructions do not claim to cover all details or variations in the equipment, procedure, or process described, nor to provide directions for meeting every possible contingency during installation, operation or maintenance. When additional information is desired to satisfy a problem not covered sufficiently for user's purpose, please contact your nearest representative. **NOTE:** Specifications and dimensions subject to change without notice.

Customer First Center
1121 Highway 74 South
Peachtree City, GA 30269
P: 770.486.4800 F: 770.486.4801
www.cooperlighting.com