


MANUAL MODE OPERATION:

- 1. SWITCHES ARE REQUIRED TO TURN CORRESPONDING LOADS ON.
- 2. LOADS TURN OFF WHEN SENSOR TIMES OUT OR WITH THE SWITCH.

AUTOMATIC MODE OPERATION:

- 1. WHEN SENSOR ACTIVATES, BOTH LOADS TURN ON.
- 2. SWITCHES CAN BE USED TO TURN LIGHTS ON OR OFF.
- 3. IF DAYLIGHT SENSOR IS ENABLED AND LIGHT LEVEL IS ABOVE SETPOINT, SWITCHPACK CONNECTED TO YELLOW LEAD WILL NOT TURN LOAD ON.

RECOMMENDED WIRE:
18-3 AWG STRANDED WIRE SHIELDED OR NONSHIELDED

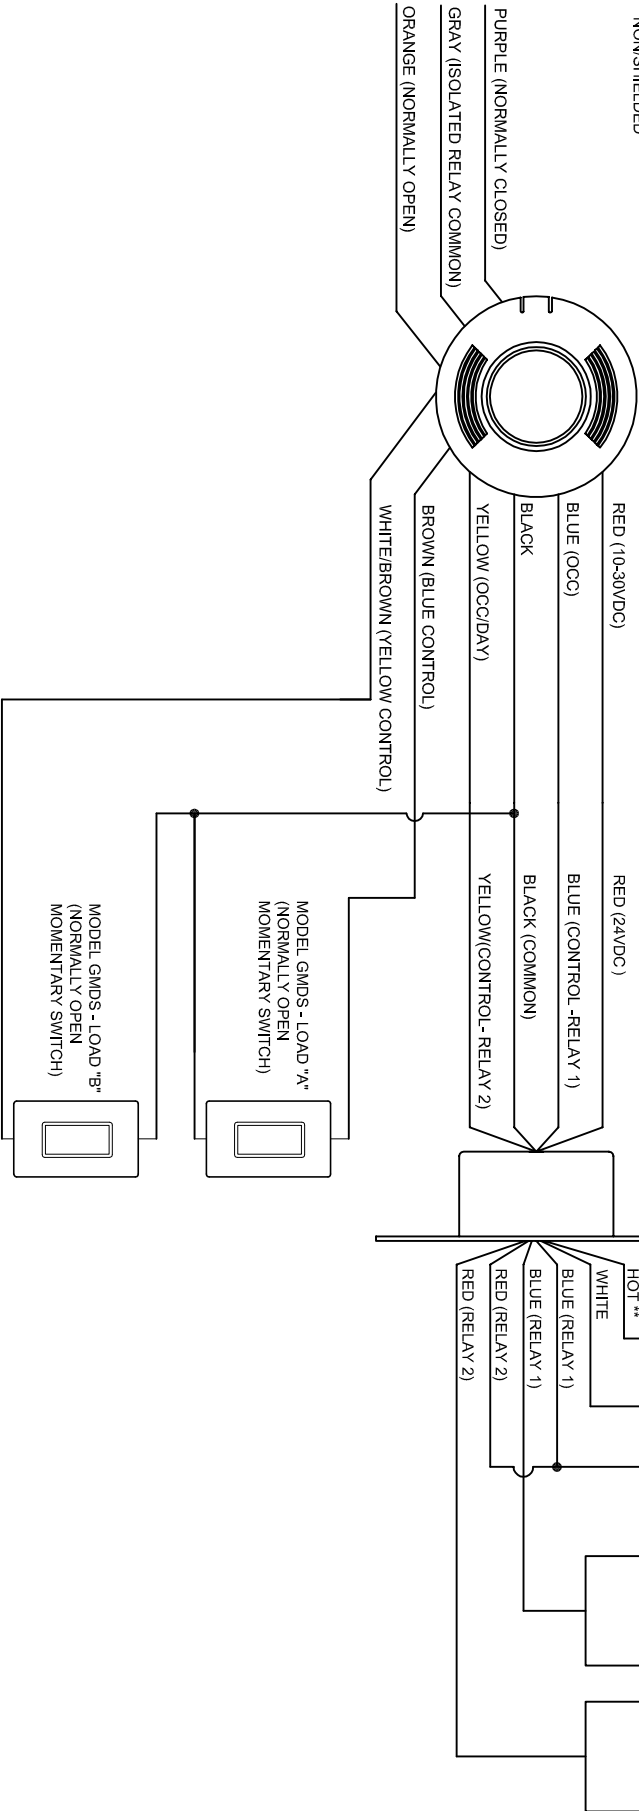

**USE BLACK LEAD FOR 120VAC.
USE ORANGE LEAD FOR 277VAC.
CAP UNUSED LEAD.

NOTES

- 1. SPD204MV-NO SWITCHPACK SHOWN. 120/277VAC 20AMP RATING PER RELAY.
- 2. BLUE AND RED WIRE LEADS ARE NON-POLARITY SENSITIVE.

NOTES:
1. SENSOR TYPE INCLUDE OAC-P-0500-R, OAC-P-1500-R, OAC-U-0501-R, OAC-U-1000-R, OAC-U-2000-R, OAC-DT-0501-R, OAC-DT-1000-R, OAC-DT-2000-R.
2. SPD204MV-NO SWITCHPACK SHOWN. REFER TO CUT SHEETS AND/OR INSTALLATION INSTRUCTIONS FOR OTHER GREENGATE SWITCHPACK WIRING.



Tel: 1-800-553-3879
Fax: 1-800-954-7016
Addr: 203 Cooper Circle
Peachtree City, GA 30269, USA
ControlsSales@cooperindustries.com
www.coopercontrols.com

| PROJECT | | | | DATE | | DWG NO. | | REV. | |
|-------------------------------|--|--|--|---|--|-------------------------|--|------|--|
| CEILING SENSOR WIRING DIAGRAM | | | | 05-29-2013 | | C2-1D1-2-21 V0-000 | | A | |
| TITLE | | | | SINGLE SENSOR BI-LEVEL MANUAL/AUTO ON AND | | MANUAL/AUTO OFF CONTROL | | | |