

This document is intended for Lighting Control Systems and IT professionals

Important: Engage appropriate network security professionals to ensure all lighting control system hardware and servers are secure for access.

Table of Contents

1	WaveLinx System Overview	4
1.1	About the WaveLinx System	4
1.2	About WaveLinx Wireless Protocol.....	4
2	Acronyms.....	4
3	References.....	4
4	System Architecture.....	5
4.1	Device Types	5
4.1.1	Output Devices	6
4.1.2	Input Devices.....	6
4.1.3	Area Controller	6
4.1.4	Supervisory System	6
4.1.5	Software and Interfaces	6
4.2	System Topologies	6
4.2.1	Standalone Topology	7
4.2.2	Networked Topology.....	8
5	Software/Firmware Compatibility Matrix	9
6	IT Network Information.....	9
6.1	LAN/WLAN	9
6.2	VLAN.....	9
6.3	Network Ports and Usage	10
6.3.1	WaveLinx Area Controller	10
6.3.2	WaveLinx Area Hub and WaveLinx DALI Hub	10
6.3.3	WaveLinx CORE.....	11
6.4	IP Address Assignment.....	11
6.4.1	IP Address Assignment (DHCP or Manual).....	12
6.4.2	IPv6 Readiness.....	12
7	WaveLinx Wireless Network	12
7.1	Wireless Network Overview.....	12
7.2	Coexisting with Wi-Fi networks.....	13
7.2.1	WaveLinx Channel Selection	14
7.2.2	Low Air time Consumption.....	14
7.2.3	Interference Tolerance.....	14
7.3	Potential causes for signal disruption.....	14
8	Configuration and Maintenance.....	15
8.1	Standalone Topology.....	15
8.1.1	Internal web pages.....	15
8.1.2	Mobile application.....	15
8.2	Networked Topology.....	16
8.2.1	CORE Lighting.....	16
8.3	Certificates.....	16
8.4	User management, Roles and Access.....	16
8.4.1	Standalone Topology	16
8.4.2	Networked Topology.....	16

- 8.5 Backup and Restore..... 16
 - 8.5.1 Standalone Topology 17
 - 8.5.2 Networked Topology 17
- 8.6 Firmware and Software updates..... 17
 - 8.6.1 Standalone Topology 17
 - 8.6.2 Networked Topology 17
- 8.7 Remote support 17
- 8.8 Firewalls (packet filtering, stateful inspection, proxy gateways) 17
- 8.9 Communication Failure to the WAC 17
- 8.10 Third party integration 18
 - 8.10.1 BACnet/IP 18
 - 8.10.2 Public (REST) API..... 18
- 8.11 Demand Response..... 18
- 9 Security 18
 - 9.1 Physical security 18
 - 9.2 Customer security..... 18
 - 9.3 Device communication security..... 18
 - 9.4 Network communication security..... 18
 - 9.5 Network segmentation security..... 19
 - 9.6 OTA update security 19
 - 9.7 Cooper Lighting Solutions Cybersecurity Center Of Excellence..... 19
 - 9.8 OSI model security..... 19
 - 9.9 Cybersecurity reporting and mitigation plans..... 19
 - 9.10 Cybersecurity or functionality issues and reporting..... 19
 - 9.11 WaveLinx Views on Cyber Security..... 20

1 WaveLinx System Overview

1.1 About the WaveLinx System

WaveLinx is a connected lighting control system that provides easy to install and implement energy code compliance, while providing a framework for future smart building requirements. The system can scale from a single wireless area controller with up to 150 (100 best practice) wireless, connected devices to control the lighting system for a small space to multiple interconnected wireless area controllers for large application spanning more than one building.

The WaveLinx system offers the following advantages:

- **Reduce commissioning time** - The WaveLinx built-in features, such as the construction group or auto creation of dimming and receptacle zones when an area is created, reduce the time by 40% or more compared to other addressable lighting systems. The WaveLinx Mobile App offers an intuitive user interface that allows the installer to program the lighting system conveniently from their smart phone.
- **Improve data collection for better decision making** - Using fixtures with the WaveLinx integrated sensor allows you to gather more granular data on how your space is being used. The data can then be used to make more informed decisions with regards to space and energy usage.
- **Monitor system health** - The Alarms console with Smart Tips allows facility manager to monitor the health of their WaveLinx system and quickly address issues using troubleshooting tips aggregated from years of industry experience. Alarms can also be sent to facility managers as emails.
- **Easily connect lighting system to other systems** - The BACnet/IP interface and Public (REST) API allows system integrator to easily integrate networked WaveLinx area controllers with a Building Automation System. The BAS can read and write to the WaveLinx areas, zones and devices.

1.2 About WaveLinx Wireless Protocol

The WaveLinx wireless network is built using the Institute of Electrical and Electronics Engineers (IEEE) 802.15.4 standard and follows strict IEEE guidelines to ensure long-term sustainability and reliable operation. The IEEE 802.15.4 standard is used for data exchange between WaveLinx input and output devices (sensors, receptacles, wallstations, etc...) and the WaveLinx Area Controllers. The wireless network is used to control the light fixtures and controlled receptacles as well as gather energy and occupancy data.

2 Acronyms

Acronyms	Description
API	Application Programming Interface
IEEE	Institute of Electrical and Electronics Engineers
LAN	Local Area Network
PoE	Power over Ethernet
REST	Representational State Transfer
TC	WaveLinx CORE
WAC	WaveLinx Area Controller

3 References

1. Cybersecurity considerations for electrical distribution systems, Cooper Lighting Solutions White Paper, Nov 2016

4 System Architecture

This section covers the architecture of a WaveLinX system.

4.1 Device Types

The WaveLinX system comprises the following device types:


Output devices – A device that directly controls the voltage of the lighting load. This is typically a driver, ballasts, relay or other load control device such as receptacles.

Input devices – A device that issues a signal to the output device either directly or via a wireless area controller to control a lighting load. This may be an occupancy sensor mounting in a ceiling or within the fixture, a wallstation or contact closure.

Programmable Controller – A device that manages runs code-compliant control strategies for the spaces that it controls. The controller communicates with the input and output devices wirelessly.

Software application – A software applications that allows users to configure and manage a standalone or networked programmable controllers. The application aggregates data from the various controllers and exposes it to other systems via various interfaces.

The diagram below shows as a typical WaveLinX system:

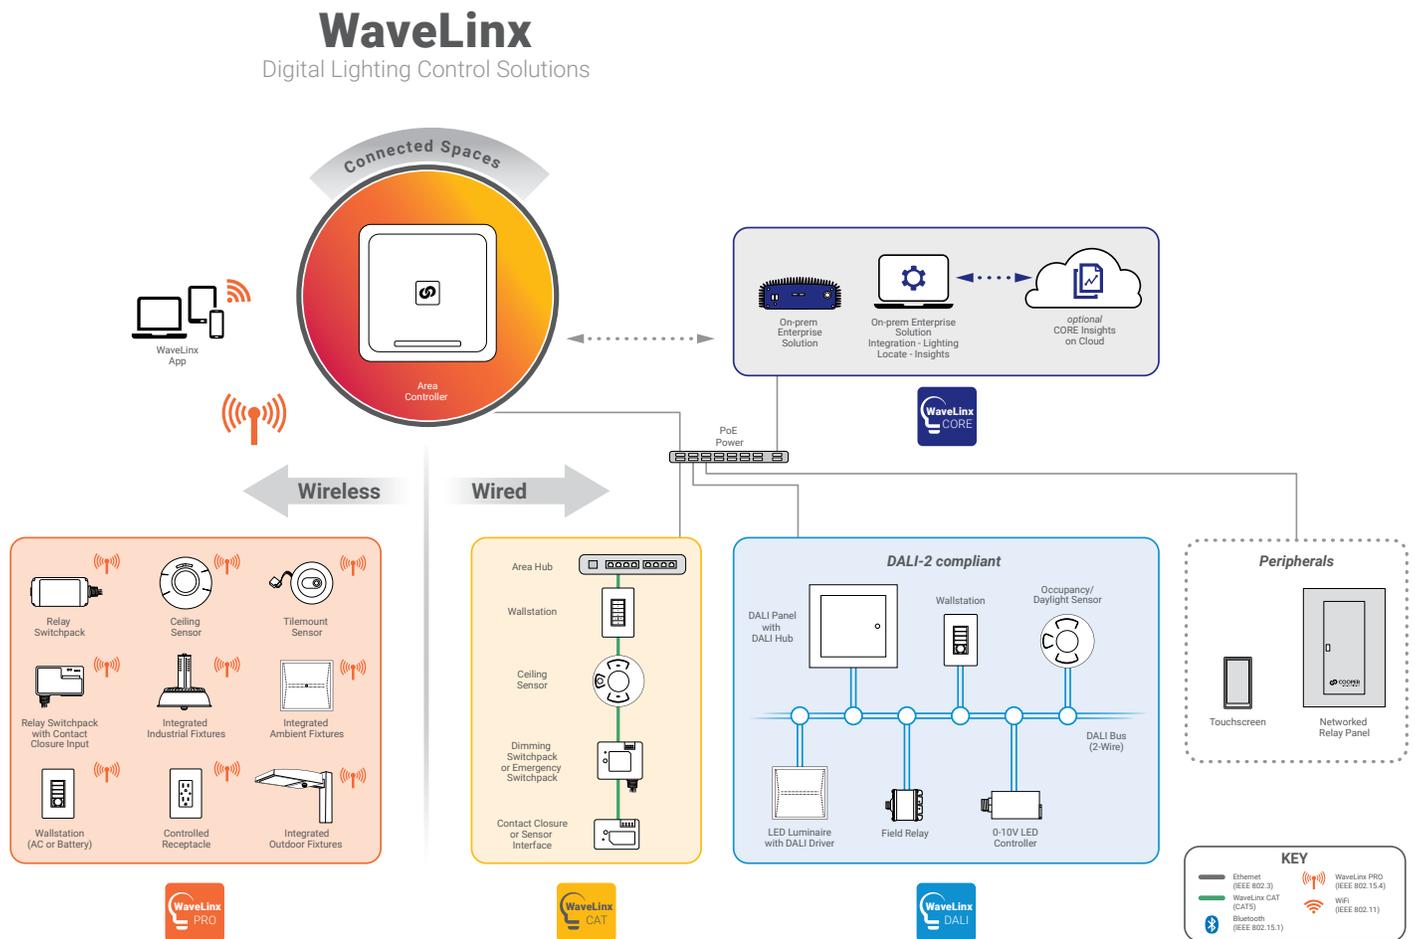

4.1.1 Output Devices

The WaveLinx wireless output devices include relay switchpacks and receptacles designed for energy-efficient control. The 120-277VAC and 120-347VAC Wireless Relay Switchpacks (Zone Control) provide 20-amp zero-crossing relay control and continuous 0-10V dimming for LED and non-LED loads, as well as plug load control, powered by the circuit they manage. Both communicate wirelessly with the WaveLinx Area Controller using IEEE 802.15.4 standard. Additionally, the Wireless Receptacle offers simplified plug load control with a constantly powered bottom outlet and a wirelessly controlled top outlet.

4.1.2 Input Devices

WaveLinx offers several wireless control devices for lighting and energy management. *Wireless Wallstation* provides manual scene and dimming control with configurable buttons via the WaveLinx app. *Wireless Integrated Sensor* combines PIR occupancy and daylight sensing within fixtures, while the *Wireless Tilemount Sensor Kit* adds motion and dimming control for luminaires without integrating to luminaires. *Wireless Ceiling Sensor* delivers battery-powered PIR occupancy sensing with up to 1500 sq. ft. coverage, and the WaveLinx Touchscreen enables elegant scene recall and zone-level light adjustments. All devices operate on the IEEE 802.15.4 wireless mesh network, except the touchscreen, which uses Ethernet.

4.1.3 Area Controller

WaveLinx Area Controller (WAC) acts as the gateway and central coordinator for wireless input and output devices. It manages network security, communication, and area control strategies configured via the WaveLinx Mobile App. A single WAC supports up to 50 areas, enabling scheduling, demand response, occupancy, daylight settings, and scene control. Multiple WACs can be linked over a building LAN to scale control to hundreds of areas, all accessible through the app.

4.1.4 Supervisory System

WaveLinx CORE is an on-premises hardware platform hosting CORE Apps Lighting, Locate, Insights and Admin for system management and integration via BACnet/IP and REST API. It comes in three variants: CORE Pro to connect up to 20 area controllers (up to 3000 devices), CORE Enterprise for up to 500 controllers (up to 32,500 devices), and a Virtual Enterprise variant for VMware environments.

4.1.5 Software and Interfaces

WaveLinx Mobile App - The WaveLinx Mobile App enables users to perform setup, configuration and maintenance of the WaveLinx system from a wireless smartphone. It allows users to easily define Areas, Zones, Occupancy Sets and Daylight Sets and associate devices to them. It also allows users to define the time-base control strategies for the spaces controlled by the WaveLinx Area Controller as well as the actions for the WaveLinx wallstations' buttons.

CORE Lighting - The Lighting application allows users to configure and monitor a code-compliant connected-lighting system designed to create an energy-efficient space. With this application, you can perform high-level supervisory tasks such as making changes to the light levels, creating lighting schedules and viewing your lighting system's energy usage. It is also the foundation for the sensing network and other advanced applications that leverage the data gathered by the system.

CORE Admin - The Admin application allows users to perform the administrative tasks required to manage the WaveLinx CORE services such as enabling/disabling interfaces, creating/editing/deleting users and roles, backing up/restoring configuration databases and upgrading the platform.

BACnet/IP Interface - CORE BACnet/IP Interface enables the integration between the WaveLinx systems with any BACnet/IP compatible Building Automation System (BAS). BACnet is a data communication protocol for Building Automation and Control Networks developed by the American Society of Heating Refrigeration and Air Conditioning Engineers (ASHRAE).


Public REST API - CORE set of APIs enables third party IoT platforms to take control of WaveLinx connected devices such as integrated sensors and incorporate them into a desired customer experiences. The Public REST APIs allow third party developers to issue control commands to areas, zones and devices and read lighting information from the areas, zones and devices as well as the lighting building hierarchy.

4.2 System Topologies

The WaveLinx system can be installed either with standalone area controller or as a distributed lighting control system, i.e. networked area controllers with a supervisory system. The section below explains the Dedicated and Network installation methods.

4.2.1 Standalone Topology

The standalone topology shown below is recommended for facilities/spaces where there is no need for a supervisory system, i.e. typically a small to medium size buildings

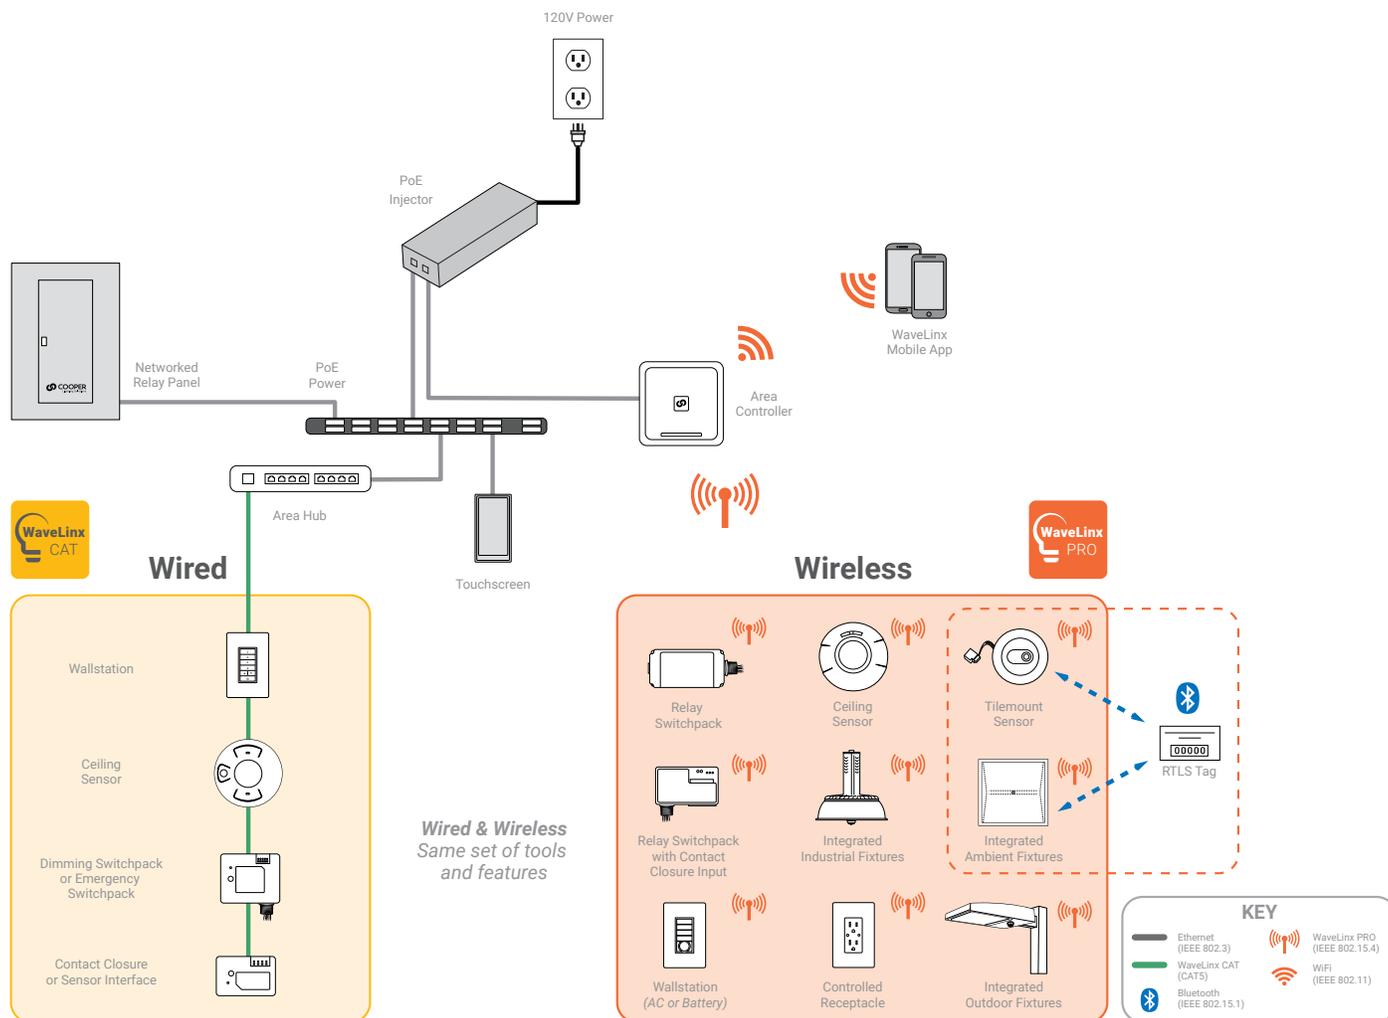

In a standalone topology, the WaveLinx Area Controllers installed within the building are not connect to a local area network (LAN) or a wireless local area network (WLAN). Each WaveLinx Area Controller would communicate to up to 150 wireless input/output devices in star-mesh topology. The WaveLinx Area Controllers are mounted centrally located above the ceiling in the spaces that they are meant to control. The power can be provided either via a POE switch or the POE Injector shipped with each WaveLinx Area Controller as shown in above illustration.

In a standalone topology the WaveLinx Area Controller acts as a:

Network Coordinator - As a network coordinator, the WaveLinx Area Controller is responsible for overall 802.15.4 network management. Each WAC only supports one 802.15.4 network. As a network coordinator, the WaveLinx Area Controller performs the following functions:

- Selects the channel to be used by the network
- Starts the network
- Manage devices addresses
- Permits other devices to join the network
- Holds a list of neighbors and routers
- Transfers application packets


Security Manager - As a security manager, the WaveLinx Area Controller provides security management, security key distribution, and device authentication for the 802.15.4 wireless network.

Area Controller - As the area controller, the WaveLinx Area Controller manages the control algorithm for the devices connected to it. The area controller sends the control commands to the output devices based on received data from the input devices (occupancy sets, daylight sets, wallstations, etc...). The device acts as the master clock for the system. As such all time-based actions are coordinated from the wireless area controller while occupancy and daylight-based actions are executed by the sensor (ceiling or integrated). The device also monitors the health of the devices connected to it.

Gateway - As a gateway the WaveLinx Area Controller connects the wireless network to other networks, i.e. a LAN and WLAN. The wireless area controller also acts as Wi-Fi access point which is used by a system installer to configure and monitor the areas covered by the devices connected to the WaveLinx Area Controller. The system installer uses a smart phone with the WaveLinx Mobile Application to configure the system. The smartphone connects to the WaveLinx Area Controller using WPA2 wireless encryption and secure network username and password. The system installer also uses the WaveLinx Area Controller's secure HTTPS (TLS1.2) web pages to setup the WaveLinx Area Controller's network settings.

4.2.2 Networked Topology

The networked topology shown below is recommended for facilities/spaces where users want to manage the WaveLinx from a central location and where the WaveLinx system needs to exchange data with other systems installed within the building such as the Building Automation System, security system, Audio Visual (AV) system, shades system. The networked topology is often required for medium to large size buildings.

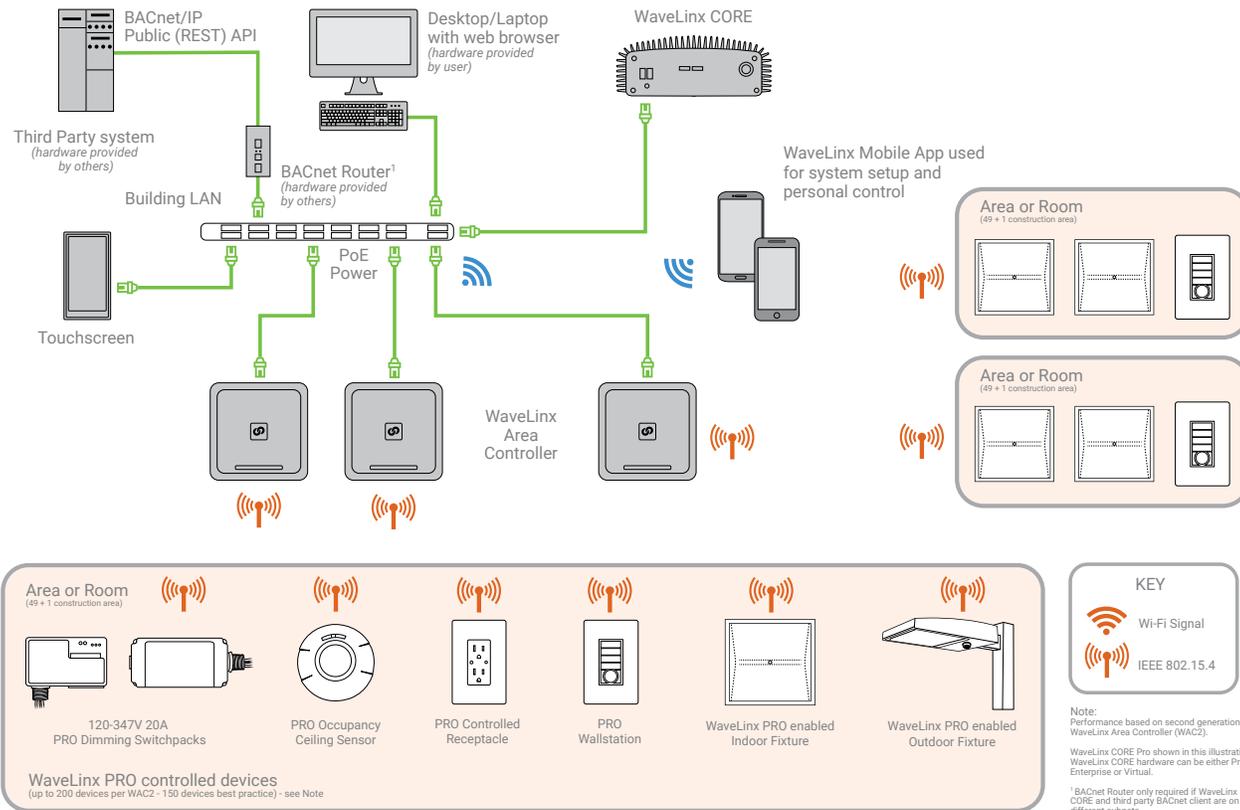

In a networked topology, the WaveLinx Area Controllers and WaveLinx CORE installed within the building(s) are connected to a common local area network (LAN). The WaveLinx CORE only supports wired Ethernet connections while the WaveLinx Area Controller can also communicate via a wireless local area controller (WLAN) as the WaveLinx Area Controller supports both wired and wireless Ethernet connections. The LAN can be dedicated to the lighting control system or shared with the other systems installed as part of the building's automation system.

Similar to the standalone topology, each WaveLinx Area Controller would act as the device network coordinator, security manager, zone controller and gateway for up to 150 devices connected to the 802.15.4 wireless network.

In addition to the WaveLinx Area Controllers, a networked topology includes WaveLinx CORE. The WaveLinx CORE is the supervisory computer that host the CORE Apps, i.e. CORE Admin and CORE Lighting.

In a networked topology, the WaveLinx CORE acts as:

- **Supervisory Software Host** - The WaveLinx CORE hosts the CORE Lighting and Admin apps, for its connected lighting systems. The CORE Apps include web-based HMLs that allow users to configure and manage the lighting system.
- **System repository** - As the system repository, the WaveLinx CORE gathers data from the devices via the WaveLinx Area Controllers and stores it on the hardware (limited to system faults).
- **System Management** - As the system manager, the WaveLinx CORE will govern the lighting system and all devices connected to the system from a single location. It will monitor the health of the system's components and alert users when faults/issues are detected.
- **Gateway** - The WaveLinx CORE acts as the IoT hub for the WaveLinx system. It hosts the interfaces used by third party systems to read/write to the WaveLinx system. These interfaces include BACnet/IP and Public (REST) API.
- **Security Manager** - As the security manager, the WaveLinx CORE ensures that the data is securely accessed by only authorized users. events management, exposing the data from the area controllers to third party system via BACnet and Public API (REST), user management and system backup.

The WaveLinx CORE will be connected to the LAN via its wired Ethernet port. Unlike the WaveLinx Area Controllers, the WaveLinx CORE does not offer a wireless Ethernet interface. The WaveLinx CORE is typically installed in the server/IT room.

If the network switch provided by the customer is PoE enabled, there is an additional incentive to use the PoE ports to power and connect the WaveLinx Area Controllers. If there are no PoE ports available or the distance between the switch and the WaveLinx Area Controller exceeds the 300 ft limit for PoE then the POE Injector shipped with each WaveLinx Area Controller can be used to power the WaveLinx Area Controller (refer to standalone topology to learn more about the PoE injector).

In a networked topology, the WaveLinx Area Controller will obtain the IP addresses for their wired Ethernet address automatically via DHCP. Alternatively, the IT administrator can assign a static IP address for any WaveLinx Area Controller. For the WaveLinx CORE, the IT administrator need to assign a static IP address which will be used when configuring the WaveLinx CORE.

At the discretion of the building IT personnel, the WaveLinx system may be setup on a dedicated lighting network LAN/VLAN or be part of the building automation network LAN/VLAN.

Once connected to the LAN, user can then integrate their WaveLinx system via the WaveLinx CORE to third party systems such as Building Automation Systems, shades control system and AV control systems. Please refer to the Third-Party System Integration section to learn more about network considerations.

In a network topology, the user will program the WACs using the WaveLinx Mobile App while monitoring the system using the CORE Lighting app. If the WaveLinx system is connected to a WLAN then the user can connect their smartphone to the WLAN to program the WACs. Alternatively, they can connect their smartphone to each WAC's Wi-Fi access point to program the areas controlled by the WAC.

Note: Cross-WAC data sharing of wall stations, CCIs and occupancy is XXXXX

5 Software/Firmware Compatibility Matrix

To ensure that the WaveLinx system is operating efficient, the user shall ensure that all the WaveLinx Cores and WaveLinx Area Controllers have compatible software/firmware. Please refer to the software/firmware compatibility matrix included in the software release notes.

6 IT Network Information

6.1 LAN/WLAN

A LAN or WLAN is only required in the case of a networked topology where third party systems need to exchange data with the WaveLinx system and users need to monitor the system from a central location using CORE Lighting application hosted on the WaveLinx CORE.

6.2 VLAN

The WaveLinx system support multiple VLAN topology, i.e. where the WaveLinx Area Controllers and WaveLinx CORE are located on different VLANs.

When implementing in a multiple VLAN environment, you must ensure that all the IP based WaveLinx devices, i.e. WaveLinx CORE, WaveLinx Area Controllers, computing devices (laptop, smart mobile), can exchange data across the VLANs. Please refer to the network ports section to ensure that the network switches/firewalls are properly configured to allow the data flow between these devices.

6.3 Network Ports and Usage

6.3.1 WaveLinx Area Controller and Outdoor WaveLinx Area Controller

To ensure proper system operation, the following network ports and protocols must be available to allow users to interact with the WaveLinx Area Controllers via the LAN.

Protocol	Port	WaveLinx Device	Usage	Status	Security
TCP	80/443	WAC	Configuration webpages (http request redirected to https)	Always Open	TLS 1.2; TLS 1.3
TCP	52725	WAC	SSL secured Common API (CAPI) web services. Comm w/ MA Gen1	Always Open	TLS 1.2
TCP	52425	WAC	SSL secured CAPI web socket. Comm w/ CORE	Always Open	TLS 1.2
TCP	52125	WAC	SSL secured Common API (CAPI) web services. Comm w/ MA Gen2	Always Open	TLS 1.2
TCP	5684	WAC	DTLS based lwm2m communication	Always Open	DTLS1.2
UDP	67	WAC	DHCP Server	Only open in Standalone Topology	
UDP	68	WAC	DHCP Server		
UDP	546	WAC	DHCPv6	Closed when in Connected Topology	
UDP	547	WAC	DHCPv6		
UDP	5353	WAC	mDNS ¹ (Avahi)	Always Open	
TCP	22	WAC	SSH	Closed by default. Admin may webservice request	TLS 1.2
UDP	123	WAC	NTP time sync	Always Open	
TCP	8884	WAC	Area Hub Communication	Always Open	TLS 1.2; TLS1.3
TCP	8885	WAC	Cross-WAC Communication	Always Open	TLS 1.2
TCP	8886	WAC	DALI Hub Communication	Always Open	TLS1.2; TLS1.3

6.3.2 WaveLinx Area Hub and WaveLinx DALI Hub

To ensure proper system operation and communication with the WaveLinx Area Controller, the following ports and protocols must be available.

Protocol	Inbound Protocol	Inbound Port	Usage	Status	Security
TCP	HTTPS	TCP 80/443	Access Webserver (request on http redirects to https)	Always Open	TLS 1.2 ; TLS 1.3
UDP	DNS Advertising	UDP 2021	mDNS ¹	Always Open	

6.3.3 WaveLinx CORE

The following inbound and outbound ports are used by the WaveLinx CORE in a networked topology.

Inbound Protocol	Inbound Port	Outbound Protocol	Outbound Port	Usage	Status
TCP	443			WEB Application/User Interface	HTTPS. Always Open
TCP	443			Public API	HTTPS. Always Open
UDP - Braodcast	47808			BACnet	BACnet. Open when BACnet is enabled. Same subnet otherwise BACnet router is needed.
UDP - Multicast	5353			Discovery (mDNS) of the WaveLinx Area Controllers (optional) ¹	Always open. Same subnet otherwise enable multicast over subnets using L3 switch by bridging/forwarding.
TCP	58761			Web Eureka Access	HTTPS. Always open for troubleshooting. Default closed. Enabled on demand for troubleshooting.
TCP	5432			PostgreSQL	Default closed. Enabled on demand for troubleshooting.
TCP	22			SSH	Default closed. Enabled on demand for troubleshooting.
		TCP	52425	Connection to WAC	Secure WebSocket to WAC
		TCP	25 or 465 or 587 or any other port	SMTP Access	Depends on the SMTP server used
		UDP	123	NTP Client	if configured
		TCP/UDP	53	DNS	If configured

NOTE:

¹ mDNS assists the WaveLinx system user with automatic device discovery on the local network without requiring manual IP entry or dedicated DNS infrastructure. When enabled, it simplifies commissioning, reduces configuration errors, and improves long-term serviceability by ensuring devices remain discoverable even if their IP addresses change. By using mDNS for zero-configuration, multicast-based discovery on the local subnet, Area Controllers, Area Hubs, DALI Hubs, Network Panels and CORE can reliably locate each other with minimal setup effort, making the overall system easier to deploy, manage, and maintain.

6.4 IP Address Assignment

6.4.1 IP Address Assignment (DHCP or Manual)

Below table captures how the various WaveLinx components obtain their TCP/IP address.

Table 2: IP Address Assignments

Device	Interface	Dynamic Addressing	Static Addressing	Notes
WaveLinx Area Controller	LAN Interface	Supported (default)	Supported Default: 192.168.1.XXX Note: 192.168.100.XXX subnet cannot be used as it is reserved for the Wi-Fi AP.	<ul style="list-style-type: none"> The WAC is the controller and gateway to the WaveLinx devices. The WAC separates the IT and OT networks The WAC is centrally located in the space above the ceiling (preferred) to wirelessly communicate to the OT WaveLinx devices via IEEE 802.15.4 192.168.100.XXX subnet is reserved for the Wi-Fi AP interface IP reservation must be employed when using DHCP
	WLAN Interface	Supported	Supported Default: 192.168.1.XXX Note: 192.168.100.XXX subnet cannot be used as it is reserved for the Wi-Fi AP.	
	Wi-Fi Access Point	Not Supported	192.168.100.1	
WaveLinx Area Hub and DALI Hub	LAN Interface	Supported (default for first 3 minutes, if DHCP server present)	Supported (after 3 min, with no DHCP server present)	<ul style="list-style-type: none"> Device must be assigned to same subnet as WAC. IP reservation must be employed when using DHCP. If defaulted to static addressing, will self-assign an IP address in the range of 192.168.1.100 to 192.168.1.255
WaveLinx Networked Panel	LAN Interface	Supported	Supported (default)	<ul style="list-style-type: none"> Device must be assigned to same subnet as WAC. IP reservation must be employed when using DHCP.
Smart Device (phone or tablet)		Supported		<ul style="list-style-type: none"> DHCP address provided by WAC when installed as a dedicated WaveLinx installation DHCP address provided by building IT wireless access point when installed as a network WaveLinx installation
WaveLinx CORE	LAN Interface	Supported	Default: 192.168.2.100	<ul style="list-style-type: none"> IP reservation must be employed when using DHCP

6.4.2 IPv6 Readiness

The WaveLinx Area Controller and WaveLinx CORE hardware are designed to be IPv6 capable. The input/output devices, currently using IEEE 802.15.4 MAC/PHY, are also Thread and IPv6 capable.

7 WaveLinx Wireless Network

7.1 Wireless Network Overview

The WaveLinx Area Controller communicates with the lighting control devices (wallstations, sensors, receptacles, etc...) wirelessly. WaveLinx wireless ecosystem uses the Institute of Electrical and Electronics Engineers (IEEE) 802.15.4 standard and follows strict IEEE guidelines to ensure long-term sustainability and reliable operation.

The IEEE, a non-profit organization, is the world's leading professional association for the advancement of technology. IEEE is a globally respected standards development group whose members are volunteers working in an open and collaborative manner. Other well-known technologies like Bluetooth® (802.15.1) and Wi-Fi® (802.11) are also part of the IEEE 802 standards family.

The IEEE 802 group continually evaluates its standards to identify areas of ambiguity or concern and works to improve its standards to ensure robustness and long-term success. To be approved as an IEEE 802 standard, IEEE 802 wireless standards must develop a Coexistence Assurance Document and implement a plan as part of the standard that ensures that all 802 wireless standards can operate and coexist in the same space.

The 802.15.4 standard is a low duty cycle, narrow-band standard that operates in the 2.4GHz ISM band with 16 channels for the 2.4GHz band. Each WaveLinx Area Controller and associated wireless devices (typically up to 150 wireless devices) can be configured to use a specific IEEE 802.15.4 channel to avoid co-channel interference with other installed devices that also communicate over the 2.4 GHz ISM band. IEEE 802.15.4 channels 11-25, corresponding with 5 MHz-wide frequency bands from 2.405 GHz to 2.480 GHz may be assigned to specific wireless mesh networks.

The wireless communication is secured and encrypted using AES 128-bit encryption.

Other wireless specifications:

- Radio: : 2.4GHz
- Standard: IEEE 802.15.4
- Transmitter Power: +7dBm
- Range: 150ft (50m) LOS
- # of Walls: 2 interior walls standard construction

If considering the use of ZigBee Home Automation (HA) based devices not available with the WaveLinx Connected Lighting system, please contact WaveLinx Tech Support.

7.2 Coexisting with Wi-Fi networks

The 2.4GHz ISM band has become particularly popular in the last few years such that households, and virtually all commercial buildings, are likely to have equipment that operates in this band. In today's commercial buildings, one will find many of the following users and possible interferers within the 2.4GHz spectrum:

- 802.11b networks
- 802.11g networks
- 802.11n networks
- Bluetooth
- 802.15.4-based Personal Area Network (PAN)
- Wireless headsets

The policies of the IEEE which require that each standard to include a coexistence statement along with the text of the standard itself. A standard will not be approved until this coexistence statement has been deemed satisfactory. As a result, the IEEE 802.15.4 – 2003 specification provides support for coexistence at both the physical (PHY) layer and the MAC sub-layer.

However despite this requirements, with so many 2.4 GHz devices, one might reasonably be concerned that crowding in the 2.4 GHz band would be a problem.


The WaveLinx system employs three techniques to co-exist with the IEEE 802.11 (Wi-Fi) networks in the 2.4 GHz frequency spectrum within the building:

- Channel Selection: This technique involves identifying the IEEE 802.15.4 communication channels that do not overlap with the the deployed IEEE 802.11a/b/g (Wi-Fi) deployment.
- Low Airtime Consumption: WaveLinx is designed to reduce wireless communications during steady state operation, greatly reducing the probability of collision with Wi-Fi traffic.
- Interference Tolerance: WaveLinx is designed to work reliably despite encountering some interference, by detecting if communications packets are lost and retransmitting if needed.

7.2.1 WaveLinx Channel Selection

WaveLinx devices have access to 16 separate, 5MHz channels in the 2.4GHz band. Several of these do not overlap with US and European versions of Wi-Fi. As illustrated in below diagram, channels 15, 20 and 25 fall within the gaps of the Wi-Fi channels. When a wireless network is formed, the WaveLinx Area Controller is required to scan through the list of available channels using the features provided by 802.15.4, and automatically select the best channel with the least interference. In most instances, the WaveLinx Area Controller selects the channels that do not overlap with the IEEE 802.11b/g/n channels.

Ultimately this means that IEEE 802.11 Wi-Fi and IEEE 802.15.4 wireless devices can co-exist in the same space without interference if they are properly set with the correct channels.

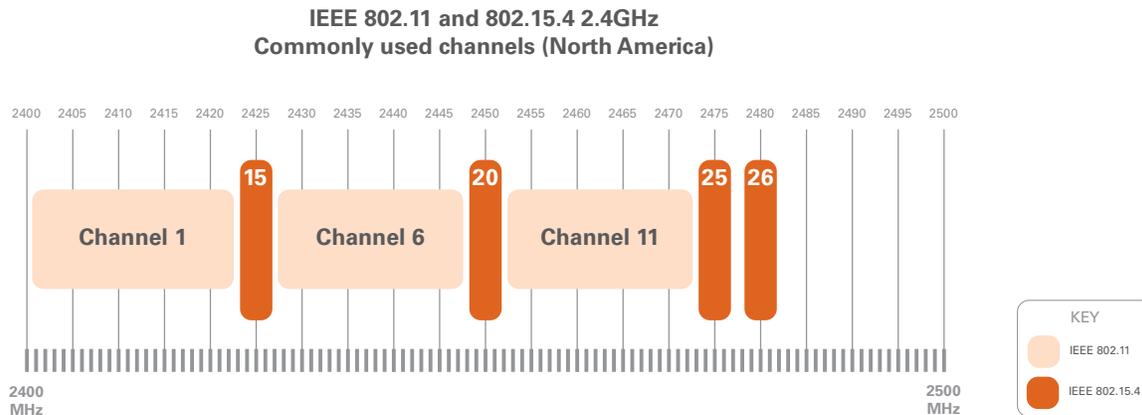

7.2.2 Low Air time Consumption

WaveLinx recognizes that it is not always possible to select non-overlapping channels. Many Wi-Fi access points aggressively use all available spectrum to maximize performance. To coexist with such solutions, WaveLinx is designed to send two messages every five minutes per sensor. The following example shows the airtime consumption for a 50,000 square foot installation.

- Airtime Consumption = # sensors*msgs_per_sensor*airtime_per_msg/5mins*100%
- 50,000 square feet = 500 sensors
- 1.5 ms of airtime per message
- Airtime Consumption = $500 * 2 * 1.5\text{ms}/5\text{mins} * 100\%$
- Typical Airtime Consumption = 0.5%

The duty cycle of the WaveLinx network is therefore extremely low; relatively few packet data units are transmitted, reducing the likelihood of an unsuccessful transmission. With such low airtime consumption, the WaveLinx system will easily coexist with Wi-Fi networks whether or not non-overlapping channels are used.

7.2.3 Interference Tolerance

In addition to ensuring that there is no impact on Wi-Fi installations, the WaveLinx system must be tolerant of interference by other Wi-Fi and IEEE 802.15.4 networks. The selection of non-overlapping channels serves to avoid the potential problem.

In addition, WaveLinx is designed to be loss tolerant. The WaveLinx communications increase transmission reliability through the use of acknowledgments and packet retransmission. As a result, when a packet is lost, the loss is detected and corrected through retransmission.

Finally, the WaveLinx system is designed to perform lighting control without requiring network communication at all. Lighting control will continue to operate in the event of a complete wireless failure.

7.3 Potential causes for signal disruption

As stated above, the WaveLinx system should be able to co-exist in buildings with Wi-Fi installations. However, there are many causes of interference and degradation that go beyond the scope of this document. Some basic actions can be addressed during the design phase that may aid in preventing issues include:

Review the network range and the distance between the devices. The further the distance between wireless devices, the lower the signal strength. Both IEEE 802.15.4 wireless and IEEE 802.11 Wi-Fi have a maximum unobstructed "line of site" range of 150 ft (50 m). However, we also need to factor in obstacles which are prevalent in our indoor spaces.

Of special consideration are the quantity and materials of walls and other obstacles that are between transmitting and receiving devices. Wireless signals can have trouble communicating through these solid objects reducing the wireless range.

Transmitter and end device placement planning during the design phase is critical to ensure proper coverage range and proper device functionality. Manufacturers may have specific recommendations for ranges for their devices that are important to pay attention to.

Review the location of the transmitters. Placing two transmitters within the same space, even if they are on different frequencies and channels can lead to disruption if they are too close together. If too close together, they may increase their signal to "shout" over the other transmitters in the space. If both transmitters are shouting, devices cannot hear or respond. Commercially available wireless products often state in their instructions to maintain at least a 5 to 10 feet air gap between other wireless transmitters to prevent this type of interference by proximity.

The quantity of devices on the network can also be a factor of signal degradation. Different network types may support different quantities of nodes. In addition, depending on the design, the quantity of devices may slow or degrade the signal. It is important to review recommendations of device limitations described by the wireless system manufacturers and incorporate this into the design.

8 Configuration and Maintenance

8.1 Standalone Topology

In a standalone topology, the user will be using the WaveLinx internal webpages to configure the WaveLinx Area Controller and the WaveLinx Mobile App to program the controller's control logic.

8.1.1 Internal web pages

The WaveLinx internal web pages allows the user to configure the WaveLinx Area Controller. The following features are offered by the web pages:

- Network settings for all three IP interfaces, i.e. Wi-Fi AP, WLAN and LAN:
 - WLAN/LAN DHCP/Static
 - Wi-Fi AP
 - SSID
 - Password
- Time setting
 - Manual or NTP
- User setting
 - Administrator - user name and password
 - User – username and password
- Certificate management
- Backup/Restore
- Firmware update for the WAC and all connected devices
- EULA

8.1.2 Mobile application

The WaveLinx mobile application permits the following configuration settings:

- Create/modify Areas
- Create/modify Zones
- Add/identify discovered devices
- Create/modify occupancy sets
- Configure the occupancy sensors attributes
- Create/modify daylight sets
- Create/modify schedules
- Configure demand response %
- Configure wallstations and program their buttons

8.2 Networked Topology

In a network topology, the WaveLinx Area Controllers are connected to the WaveLinx CORE. User will continue to configure the WAC using the WAC's internal web pages and program the WAC using the WaveLinx Mobile App. The WaveLinx CORE host the CORE Lighting and CORE Admin apps.

8.2.1 CORE Lighting

The WaveLinx CORE hosts the CORE Lighting application which acts as the supervisory application for the WaveLinx system. The following features are offered by the CORE Lighting app:

- Network settings for the WaveLinx CORE
- System settings for the WaveLinx CORE, i.e. discover WaveLinx Area Controllers and import their system information (device, etc...)
- Time settings (static IP) for the WaveLinx CORE
- User settings for the users access the WaveLinx CORE
- Configure the BACnet/IP interface
- Configure the Public (REST) interface
- View the Alarms and events generated by the WaveLinx system

8.3 Certificates

WaveLinx uses SSL certificates to secure the communication between the WaveLinx Area Controller and the Mobile App as well as between the WaveLinx Area Controllers and the WaveLinx CORE. The SSL certificates are installed at the factory.

8.4 User management, Roles and Access

8.4.1 Standalone Topology

User authentication is required to allow a user to configure the WaveLinx Area Controller using the controller's web pages and to program the control logic using the WaveLinx Mobile Application. The WaveLinx Area Controller currently supports two roles:

- Administrator
- User

Single sign-on or LDAP access is not supported.

8.4.2 Networked Topology

User authentication is required to allow a user to configure the WaveLinx Area Controller using the controller's web pages, to program the control logic using the WaveLinx Mobile application and to configure the WaveLinx CORE using CORE Lighting app. The WaveLinx CORE current supports the following roles:

- System Administrator
- IT Administrator
- Facility Manager
- Tenant
- Viewer
- Third Party Integration
- Demand Response

The WaveLinx CORE does not currently support single sign on or LDAP access through the building network. The WaveLinx Area Controller users and roles are different than the WaveLinx CORE users and roles.

8.5 Backup and Restore

The system allows users to back up their WACs and WaveLinx Cores and restore the backed up images. It is recommended that users perform a temporary backup of data prior to doing a firmware update to the system, in the event something should be updated incorrectly. Once the firmware update has completed successfully a permanent backup can be done and stored per standard building IT processes.

8.5.1 Standalone Topology

In a standalone topology, the user must backup manually each standalone WaveLinx Area Controllers (WACs) using the WAC's internal admin web pages.

Each WAC performs its own backup of all programming and network information. The restore function is used in the event of a WAC failure and replacement or if the user has to revert back to a previous programming.

8.5.2 Networked Topology

In a networked topology, users must manually backup each WaveLinx Area Controller (WAC) using the WAC's Internal admin web pages and the WaveLinx CORE using CORE Lighting app.

The WaveLinx CORE and each WAC perform their own backup of all programming and network information. Both the WaveLinx CORE and the WAC support the restore function. The restore function is used in the event of a WaveLinx CORE or WaveLinx Area Controller failure and replacement or if the user has to revert back to a previous programming.

8.6 Firmware and Software updates

Users can update the software/firmware of the WaveLinx devices. For the wireless devices, the firmware is update over the air (OTA). Firmware and software updates are typically released on a semi-annual basis for normal activities. Software patches are handled as needed.

If the user has registered to myapps.cooperlighting.com then the user will get an automatic notification of firmware and software updates. Additional information will be provided through website information.

8.6.1 Standalone Topology

In a standalone topology, the user updates the software/firmware of the WAC and all devices connected to the WAC via the WAC's internal web page. The device files are encrypted for each product (ex: wireless wallstations, wireless switchpacks).

For the WaveLinx Area Controller and the wireless devices connected to the WAC, the firmware updates are handled via the WAC internal web pages. The firmware update package is uploaded to each WaveLinx Area Controller. The WAC then manages the distribution and installations of the updates to all wireless devices connected to it such as integrated sensors, wallstations, etc....

Mobile application updates are handled through standard application updates through Android and iOS stores.

8.6.2 Networked Topology

In a networked topology, the user updates the software of the WaveLinx CORE using the CORE Lighting application. The firmware update package is uploaded to the WaveLinx CORE and then the user will initiate the update process.

8.7 Remote support

For some configuration and diagnostics purposes our technical services staff may offer remote access services. This may be accomplished in several ways depending on the customer's network configuration and IT requirements.

Most often temporary access is provided by the facility's IT department via a VPN access to the building automation network. In some facilities, 4G modems have been installed allowing the technical support team to access the system's programming.

Please contact technical support to learn more about after-market services.

8.8 Firewalls (packet filtering, stateful inspection, proxy gateways)

These items should be handled as needed by the local building IT department. The implementation of these security features would be the responsibility of the IT network architect and would not interfere with the standard operation of the lighting system as that is occurring on the OT network.

Additionally, the WaveLinx Area Controller/Gateway includes a firewall isolating the IEEE 802.15.4 based lighting device and sensor network communications from the IEEE 802.3/IEEE 802.11 based LAN/WAN network.

8.9 Communication Failure to the WAC

In the event of a loss of communication between the WaveLinx Area Controller and associated devices, the light fixtures will remain at their current light level for approximately one (1) hour. After one (1) hour of lack of communications the wireless devices will continue to operate in disconnected mode with individual luminaire occupancy being the primary method of control.

The WaveLinx system is designed to be able to be compliant with UL924 emergency lighting standards as long as the appropriate devices are included in the system design.

8.10 Third party integration

The WaveLinx system interfaces with other systems via the WaveLinx CORE. The WaveLinx CORE hosts the BACnet/IP interfaces and Public (REST) API which can be used by third party systems to read/write to the WaveLinx system.

8.10.1 BACnet/IP

The WaveLinx CORE hosts a BACnet/IP Interface that enables the integration between the WaveLinx systems with any BACnet compatible system such as Building Automation Systems (BAS). BACnet is a data communication protocol for Building Automation and Control Networks developed by the American Society of Heating Refrigeration and Air Conditioning Engineers (ASHRAE).

Through the BACnet/IP, users can change the light levels for individual devices, zones and areas; and similarly, the user can read the value of the individual devices (occupancy sensors, drivers, ballasts and daylight sensors) and individual space outputs (zone light levels, area scenes) from their BAS console.

8.10.2 Public (REST) API

The WaveLinx CORE hosts a Public (REST) API which allows third party application to exchange data with the WaveLinx system. The API does not provide the ability to change software programming of the system. API's are used for status and override of current state.

8.11 Demand Response

Demand Response is currently supported through an IP connection into each WAC from the building management system or other third-party system. See the WaveLinx Demand Response application note for more information on the connection.

9 Security

Both WaveLinx and WaveLinx CORE view security as a cornerstone of a safe, dependable and reliable electrical system. Accordingly, the WaveLinx system employs current industry best practices to reduce, identify, contain and manage security risks. WaveLinx has been designed and engineered with wireless security as a key requirement with flexibility to accommodate improvements if new security attack surfaces are identified. The Product Cybersecurity Center of Excellence (PCCoE) provided guidance throughout the development of WaveLinx and offers customers an Internet accessible portal to identify emerging threats, find ways to secure products against them and help customers deploy and maintain product solutions in a secure environment. More information on the PCCoE can be found at www.cooperlighting.com.

The WaveLinx System uses a multi-tiered approach to addressing industry best practices for security risk management and utilizes guidelines promulgated by the Department of Homeland Security (DHS), National Institute of Standards and Technology (NIST) and industry standards organizations to achieve a secure and adaptable lighting control platform.

9.1 Physical security

An architecture that isolates the wired Ethernet network from the wireless network, which strictly limits the possibility of the WaveLinx wireless being used as an access point to the corporate network and gain confidential information.

Physical access also involves the customer location. This includes not allowing unauthorized personnel in areas where they do not belong, or access to devices they should not be connecting to.

9.2 Customer security

Customer security process is a partnership with the customer and involves multiple levels of password and network access protection. Beyond physical access the customer provides an additional layer of security with strong authentication to access their corporate wired or wireless network and limiting the devices that can access those networks.

WaveLinx provides additional protection with unique username and password requirements for each WaveLinx Area Controller that are securely stored per NIST-recommended best practices.

9.3 Device communication security

For secure device-to-device communications, encryption is an important factor to reduce the potential of someone reading data sent on the network. For that reason, all WaveLinx communications use AES 128-bit encryption, recommended by NIST as part of FIPS publication 197.

9.4 Network communication security

WaveLinx uses secure HTTPS (TLS1.2) protocols for securing connections to the WaveLinx Area Controller over the wired network. WaveLinx uses secure WPA2 Enterprise technology for secure connections to the WaveLinx Area Controller over the Wi-Fi network when acting as an access point. If the WaveLinx Area Controller is connected to a wired network for communications this connection method is disabled.

WaveLinx mobile applications uses HTTPS (TLS1.2) as part of its communications to the WaveLinx Area Controller regardless of connection method, which means only our mobile application can send data to the WaveLinx system.

9.5 Network segmentation security

Each WaveLinx Area Controller employs its own unique keys, which limits any potential breach to only a small area of the system. The WaveLinx Area Controller (WAC) provides segmentation between the lighting Operational Technology (OT) network and the enterprise Information Technology (IT) network.

The IT/OT network segmentation provides a barrier to possible IT network attack surface exposure. Even if an attack within the lighting (OT) network and its devices is successful, the WAC isolates the enterprise IT network from potential attack.

9.6 OTA update security

WaveLinx provides a method to allow for digitally signed/encrypted firmware update files to be sent to the devices over the air (OTA). It is imperative as part of network security to ensure OTA updates are digitally signed firmware images from their manufacturer, so the devices recognize they are valid updates from that manufacturer and not sent with a malicious intent.


9.7 Cybersecurity Center Of Excellence

Cybersecurity Center of Excellence (COE) involvement and guidance was key as part of the WaveLinx development to ensure our product incorporates industry and governmental network security best practices.

The COE also provides a publicly accessible site for information and feedback concerning cybersecurity threats and responses, as well as a method for you to monitor network breach risks.

9.8 OSI model security

WaveLinx supports a seven-layer multi-tiered approach to security, below we illustrate how WaveLinx supports security through the entire seven layer OSI model, not just the WaveLinx applicatio

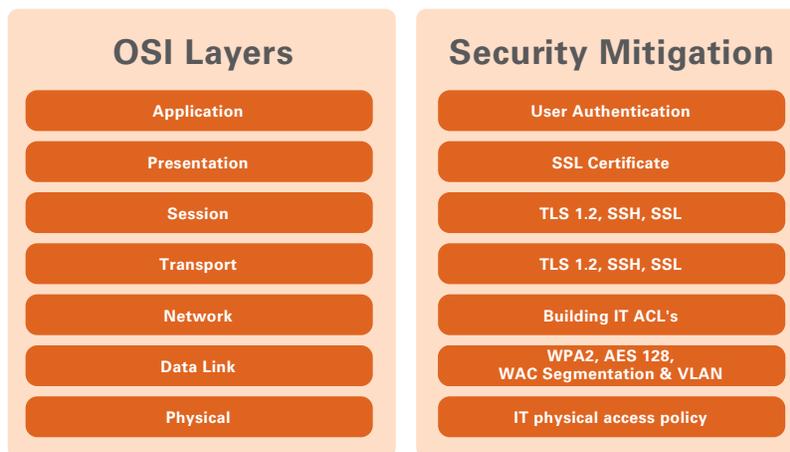

9.9 Cybersecurity reporting and mitigation plans

Cybersecurity Center of Excellence (COE) involvement and guidance is key as part of all current and future development to ensure our product incorporate industry and governmental network security best practices.

COE considers latest available best industry practices (DHS, NIST, FIPS) to reduce, identify, contain and manage risks: Deter, Protect, Detect, React, Recover.

The COE also provides a publicly accessible site for information and feedback concerning cybersecurity threats and responses, as well as a method for you to monitor network breach risks.

See www.cooperlighting.com for more detail.

9.10 Cybersecurity or functionality issues and reporting

Issues found in the field can be reported to technical support, who will attempt to replicate the issue. If the issue can be replicated it is reported through internal issue tracking software which assigns the issue to the engineering team for resolution.

Depending on the severity and priority of the reported issue, this could include standard firmware or software updates published to the website or a proactive service visit by field services.

9.11 WaveLinx Views on Cyber Security

WaveLinx views security as a cornerstone of a safe, dependable and reliable electrical system. Accordingly, WaveLinx employs current industry best practices to reduce, identify, contain and manage security risks. These systems have been designed and engineered with wireless security as a key requirement with flexibility to accommodate improvements if new security attack surfaces are identified. The Product Cybersecurity Center of Excellence (PCCoE) provided guidance throughout the development of each system and offers customers an Internet accessible portal to identify emerging threats, find ways to secure products against them and help customers deploy and maintain product solutions in a secure environment. More information on the PCCoE can be found at www.cooperlighting.com.