

DESCRIPTION

The Standard Parabolic is a value driven luminaire designed and manufactured for value engineered applications. The luminaire features a nominal 3" deep precision cell parabolic louver and a 4-3/4" deep para-contoured housing for glare control and optimum performance. The series is compatible with all of today's popular ceiling systems and is available with a number of options and accessories for application versatility. The Standard Parabolic is designed to offer maximum value in price sensitive applications. The luminaire is an excellent choice for commercial office spaces, schools, hospitals or retail merchandising areas.

SPECIFICATION FEATURES

Construction

4-3/4" deep, para-contoured housing, die formed of code gauge, prime cold rolled steel. Die embossed housing has full length die formed stiffeners for added strength. Contoured ballast/wireway cover is easily removed. Die formed captive lampholder bracket fully encloses lampholder wiring permitting easy lampholder replacement. Heavy gauge end plates are securely attached with interlocking tabs and screws. Four auxiliary fixture end suspension points provided. KOs for continuous row wiring. End plates have integral Grid-Lock feature for safety and convenience.

Electrical**

Ballasts are CBM/ETL Class "P" and are positively secured by mounting bolts. Pressure lock lampholders. UL/CUL listed. Suitable for damp locations.

Finish

Lighting grade, baked white enamel finish. Multistage, iron phosphate pretreatment ensures maximum bonding and rust inhibition.

Hinging/Latching


Positive spring loaded, self locking, steel latches. Safety lock T-hinges allow hinging and latching from either side.

Louver


Die formed of low iridescent, vertical grain anodized aluminum. Finish is Anodic oxide coating. Accurate precision parabolic cells are held in place with interlocking feature. True-cut mitered corners. Black reveal with integral mechanical light seal around entire perimeter of louver. Louver protected from construction contaminants by polyethylene cover.

Compliance


Options to meet Buy American Act requirements.

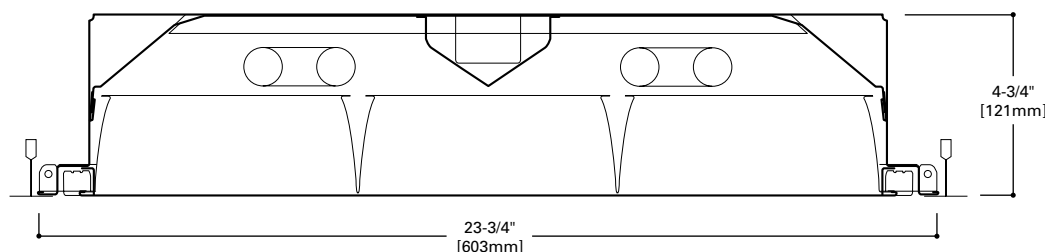

MOUNTING DATA

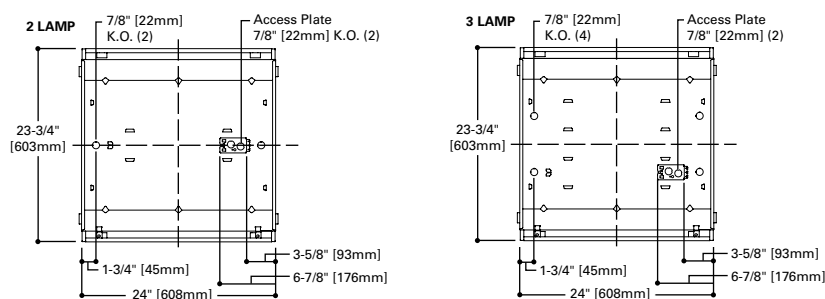

LAMP CONFIGURATIONS

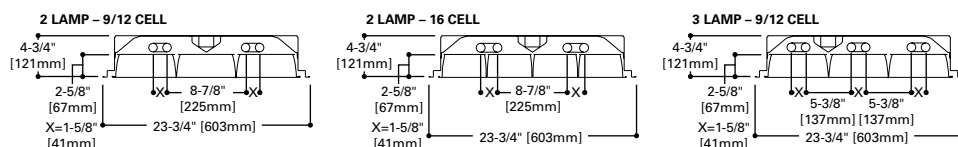

CEILING COMPATIBILITY

G	G	G	F	MZ	Ceiling Type	Trim Type
Grid/Lay-in Standard	Concealed T	Slot Grid	Aluminum Flange Trim With Supporting Swing Gates	Modular Trim With Supporting Swing Gates	Exposed Grid	G
					Concealed T	G
					Slot Grid	G
					Flange	F
					Concealed "T" or "Z"	MZ
					Metal Pan	MZ
					(Verify compatibility/ consult factory.)	



2EP3GX

2U1-5/8

3U1-5/8

9, 12, 16 Cell

**2' X 2' PARABOLIC
2 OR 3 LAMP T8
SEMI-SPECULAR, SPECULAR
OR WHITE PAINTED LOUVER**

Paralux III
Recessed Static or Air
Supply Troffer



ENERGY DATA

Input Watts:

EB Ballast & STD Lamps

2U1-5/8 (61), 3U1-5/8 (91)

Luminaire Efficacy Rating

LER = FP-55


Catalog Number: 2EP3GX-2U1-5/8S33I

Yearly Cost of 1000 lumens,
3000 hrs at .08 KWH = \$4.36

**Reference the lamp/ballast data in the Technical Section for specific lamp/ballast requirements.

LINEAR DISCONNECT

Designed to provide safe and convenient means of disconnecting power



Electronic Ballast

Spacing criterion:
(II) 1.2 x mounting
height, ($\perp$) 1.4 x
mounting height

Efficiency 61.9%

LER = FP-53

Yearly Cost of 1000 lumens, 3000 hrs at .08 KWH = \$4.53

Candlepower

Angle	Along II	45°	Across II
0	2280	2280	2280
5	2263	2272	2289
10	2216	2261	2312
15	2157	2245	2339
20	2082	2216	2359
25	1983	2169	2360
30	1872	2107	2269
35	1738	1996	2049
40	1583	1803	1895
45	1412	1555	1576
50	1208	1282	958
55	968	861	513
60	648	425	294
65	270	174	122
70	75	57	50
75	26	24	25
80	11	11	11
85	2	2	2
90	0	0	0

Coefficients of Utilization


[illegible]

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixture
0-30	1855	22.1	35.7
0-40	3068	36.5	59.0
0-60	4962	59.1	95.4
0-90	5201	61.9	100.0
0-180	5201	61.9	100.0

Typical VCP Percentages

	Height Along		Height Across	
Room Size (Ft.)	8.5'	10.0'	8.5'	10.0'
20 x 20	71	64	78	74
30 x 30	79	73	84	79
30 x 60	83	78	86	82
60 x 30	81	77	86	82
60 x 60	84	81	88	85



Electronic Ballast

Spacing criterion:
(||) 1.2 x mounting
height, (⊥) 1.4 x
mounting height

Efficiency 60.7%

LER = FP-55

Yearly Cost of 1000 lumens, 3000 hrs at .08 KWH = \$4.36

Candlepower

Angle	Along II	45°	Across
0	1393	1393	1393
5	1387	1385	1383
10	1358	1358	1357
15	1320	1310	1308
20	1269	1251	1286
25	1206	1193	1327
30	1132	1169	1307
35	1046	1140	1226
40	950	1058	1173
45	841	948	1126
50	718	849	1051
55	577	728	874
60	389	519	506
65	177	238	146
70	58	58	46
75	20	20	23
80	8	8	11
85	2	2	4
90	0	0	0

Coefficients of Utilization

Effective floor cavity reflectance												20%													
rc	80%								70%				50%				30%				10%				0%
rw	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0				
RCR																									
0	72	72	72	72	71	71	71	71	67	67	67	65	65	65	62	62	62	61							
1	67	65	63	61	66	64	62	60	61	60	58	59	58	56	57	56	55	54							
2	62	58	54	51	61	57	52	50	55	52	50	53	51	49	51	49	48	46							
3	57	52	47	44	56	51	47	43	49	45	43	47	44	42	46	43	41	40							
4	53	46	41	38	51	45	41	37	44	40	37	42	39	36	41	38	36	35							
5	48	41	36	33	47	41	36	32	39	35	32	38	35	32	37	34	31	30							
6	45	37	32	29	44	37	32	28	36	31	28	35	31	28	34	30	28	27							
7	42	34	29	25	41	33	29	25	32	28	25	32	28	25	31	27	25	24							
8	39	31	26	23	38	30	26	23	30	25	22	29	25	22	28	25	22	21							
9	36	28	24	20	35	28	23	20	27	23	20	27	23	20	26	23	20	19							
10	34	26	21	18	33	26	21	18	25	21	18	25	21	18	24	21	18	17							

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixture
0-30	1073	19.2	31.6
0-40	1779	31.8	52.4
0-60	3154	56.3	92.8
0-90	3397	60.7	100.0
0-180	3397	60.7	100.0

Typical VCP Percentages

	Height Along		Height Across	
Room Size (Ft.)	8.5'	10.0'	8.5'	10.0'
20 x 20	75	69	74	67
30 x 30	82	76	81	75
30 x 60	85	81	84	79
60 x 30	85	80	83	78
60 x 60	87	84	86	82

ORDERING INFORMATION

SAMPLE NUMBER: 2EP3GAX-2U1-5/8S33I-UNV-EB81-U

Domestic Preferences ⁽¹⁰⁾ [Blank] =Standard BAA =Buy American Act	Rating Blank =Standard ATW-SW4 =Chicago Rated	HR =Heat Removal ⁽¹⁾	Width 2 =2' Width	EP =Paralux Louver	3 =3" Louver Depth	Trim Type G =Grid/Lay-in (Standard) G =Concealed T/Slot Grid ⁽⁷⁾ F =Aluminum Flange Trim ⁽⁸⁾ MZ =Modular Trim	AX =Air Supply Floating Louver X =Blank Side/Floating Louver - Non-Air Supply (Omit A) AVX =Air Supply Floating Louver with Directional Air Vane (Add V)	Number of Lamps 2 =2 Lamps 3 =3 Lamps ⁽³⁾	Wattage (Length) U1-5/8 =31W T8 (24")	Louver Color S =Silver W =White	Cell Configuration 33 =3 Rows of 3, 9 Cell 34 =3 Rows of 4, 12 Cell 44 =4 Rows of 4, 16 Cell	Louver Finish I =Semi-Specular/Haze (Low Iridescent) Standard (Silver Only) P =Painted (White only)	Option – Aluminum Flange Trim ⁽⁸⁾ Blank =SW (Single White) Type Color 'S' Single 'N' Natural 'R' In Row 'W' White 'E' End of Row	Voltage ⁽⁴⁾ 120V =120 Volt 277V =277 Volt 347V =347 Volt UNV =Universal Voltage 120-277 ⁽⁵⁾	Options GL =Single Element Fuse GM =Double Element Fuse WTR =White Reveal Flex =Flex Installed (Reference Flex ordering information) EL =Emergency Installed ^{(6), (9)}	Ballast Type EB8 =T8 Electronic Start. Total Harmonic Distortion < 10% No. of Ballast 1, 2 or 3 EB8 /PLUS =T8 Electronic Start. Total Harmonic Distortion < 10% High Ballast Factor >1.15 No. of Ballast 1, 2 or 3 ER8 =T8 Electronic Program Rapid Start. Total Harmonic Distortion < 10% No. of Ballast 1, 2 or 3	Options PAF =Painted After Fabrication REP =Riveted Endplates Packaging U =Unit Pack PAL =Job Pack, out of carton PALC =Job Pack, in carton
---	--	--	------------------------------------	---------------------------	---------------------------	--	---	---	--	--	---	--	---	--	---	--	--

ACCESSORIES ⁽¹¹⁾

EQ-CLIP-U=T-BAR Safety Earthquake Clips⁽²⁾

SHIPPING DATA

Catalog No.	Wt.
2EP3GX-2U1-5/8S33I	28 lbs.
2EP3GX-2U1-5/8S44I	28 lbs.
2EP3GX-3U1-5/8S33I	28 lbs.
2EP3GX-3U1-5/8S34I	28 lbs.
2EP3GX-3U1-5/8S44I	28 lbs.

NOTES: ⁽¹⁾ Integral end plate grid lock feature not available in heat removal. ⁽²⁾ An EQ Grid Clip is recommended for all 9/16" ceiling systems. Four required per fixture. ⁽³⁾ Standard off-center ballast on 3-lamp fixtures. ⁽⁴⁾ Products also available in non-US voltages and frequencies for international markets. ⁽⁵⁾ Not available when specifying emergencies, voltage must be specific. ⁽⁶⁾ Fixtures equipped with "EL" option may require a 5-1/2" housing depth. If installing in field, must use low profile battery pack. ⁽⁷⁾ Louver is recessed by 5/16" in Concealed T or Slot Grid T. ⁽⁸⁾ Specify row configuration, type in catalog number when ordering complete fixture. ⁽⁹⁾ Please specify required voltage, 120V or 277V. ⁽¹⁰⁾ Only product configurations with this designated prefix are built to be compliant with the Buy American Act of 1933 (BAA). Please refer to **DOMESTIC PREFERENCES** website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. ⁽¹¹⁾ Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.

Specifications & dimensions subject to change without notice. Consult your Cooper Lighting Solutions Representative for availability and ordering information.



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

© 2023 Cooper Lighting Solutions
All Rights Reserved.

Specifications and dimensions
subject to change without notice

ADF090227
January 27, 2023 4:19 PM