

# Touch Screen


Catalog#	Prepared by
Project	Date
Comments	Type

## Overview

Fifth Light's Touch Screen provides graphical control of the lighting system at your fingertips. A large visual display makes it easy to adjust light levels and apply preset scenes. Control multiple types of lighting devices from a single easy to use interface.

## Features

- Adjust light levels by pressing the up and down arrows or the On and Off buttons
- Apply lighting scenes by selecting appropriate preset button
- Virtual groups defined through software avoid hard wired high voltage connections
- Ethernet interface shares data on existing Local Area Networks

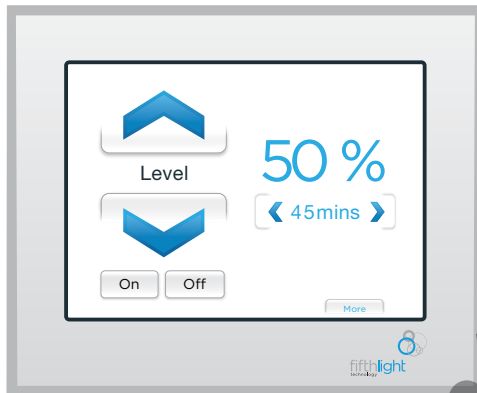

Discontinued  
06-09-2022



## Specifications

<b>Catalog #</b>	(See ordering chart)
<b>Performance</b>	<b>Input Voltage:</b> 24 VDC supplied by Lighting Control Panel
	<b>Power Consumption:</b> 12.1 Watts
	<b>Operating Environment:</b> 32°F to 104°F (0°C to 40°C) For indoor use only
<b>Wiring &amp; Mounting</b>	<b>Dimensions:</b> 5.75"H x 7.28"W x 2.45"D (136mm x 185mm x 62.3mm)
	<b>Power:</b> Wire terminal connection, use 14 to 18 AWG solid/stranded LV pair
	<b>Network:</b> 2 - RJ45 Ethernet connectors 10/100 Mbits
	<b>Mounting:</b> Mounting frame included with product. See back/next page for dimensions.



## Dimensions

(Inches/mm)


- Touch Screen

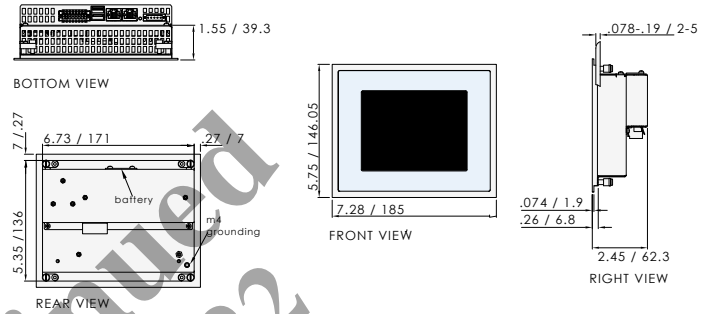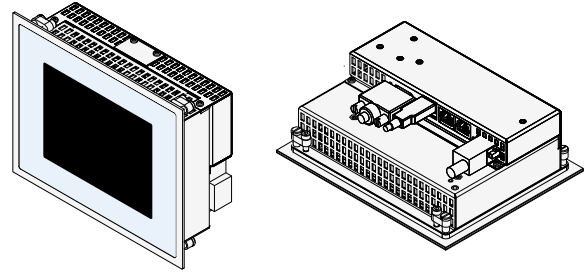


- Mounting Frame

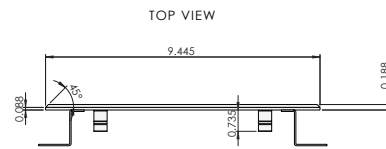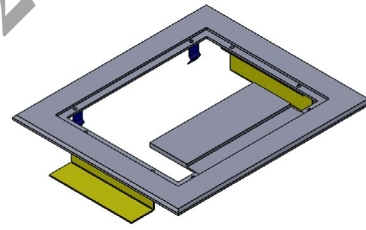

SIDE VIEW




BACK VIEW



Discontinued  
06-09-2022

### Sample System Topology

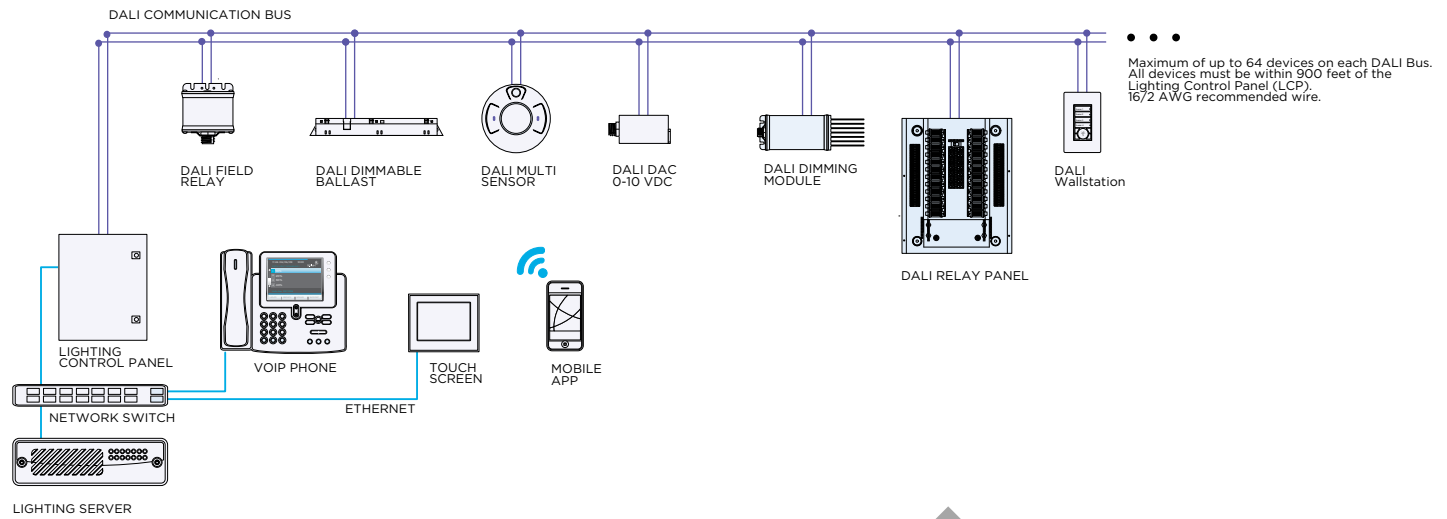

### Ordering

Catalog #	Description
FLT-TS	5.7" Touch Screen, Includes Mounting Bracket
FLT-TS-MB	5.7" Touch Screen Mounting Bracket

Discontinued  
06-09-2022

**Cooper Lighting Solutions**  
 1121 Highway 74 South  
 Peachtree City, GA 30269  
 P: 770-486-4800  
 www.cooperlighting.com

© 2020 Cooper Lighting Solutions  
 All Rights Reserved  
 Printed in USA  
 Publication No. ACC140034  
 July 6, 2018 9:49 AM

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

