

Low Voltage Wallstation

Catalog#	Prepared by
Project	Date
Comments	Type

Overview

Fifth Light's Low Voltage Wallstation provides continuous dimming control over any type of DALI lighting fixture. The wallstation features up to 10 buttons making it easy for users to select groups, apply scenes and adjust light levels from 0 - 100%.

Features

- On/Off/Dimming control over any type of DALI controlled lighting fixture
- Available in multiple button configurations (1, 2, 4, 5, 6, 8 or 10 buttons)
- All device settings (including timers and groups) are programmable through software, no physical adjustments needed



Discontinued
12-21-2022


Specifications

Catalog #	(See ordering chart)
Performance	<p>Input Voltage: 24 VDC supplied by Lighting Control Panel</p> <p>Operating Environment: 32°F to 104°F (0°C to 40°C) For indoor use only</p> <p>Dimensions: 4.31" H x 1.63"W x 1.75"D (110mm x 41mm x 45mm)</p>
Wiring & Mounting	<p>Wire terminal connection, one (1) connection for each button, one (1) common connection for all buttons. Use 16 AWG solid/stranded wire.</p> <p>Mounting: Standard single gang junction box</p>


Dimensions

(Inches/mm)


- With faceplate

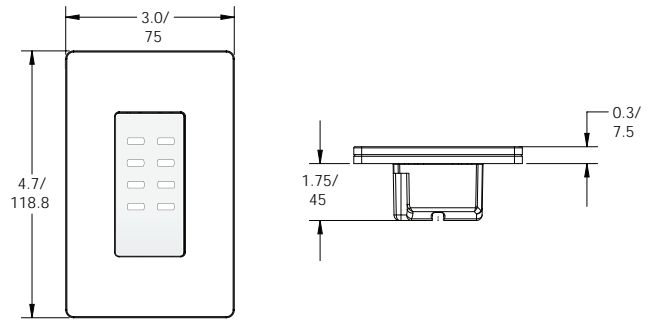


- Without faceplate

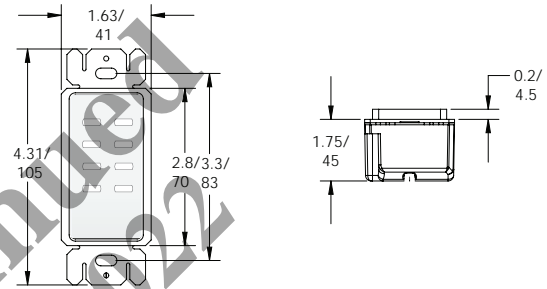

Wiring Diagram

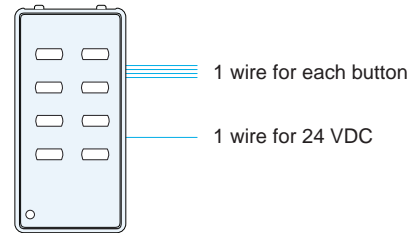

System Architecture

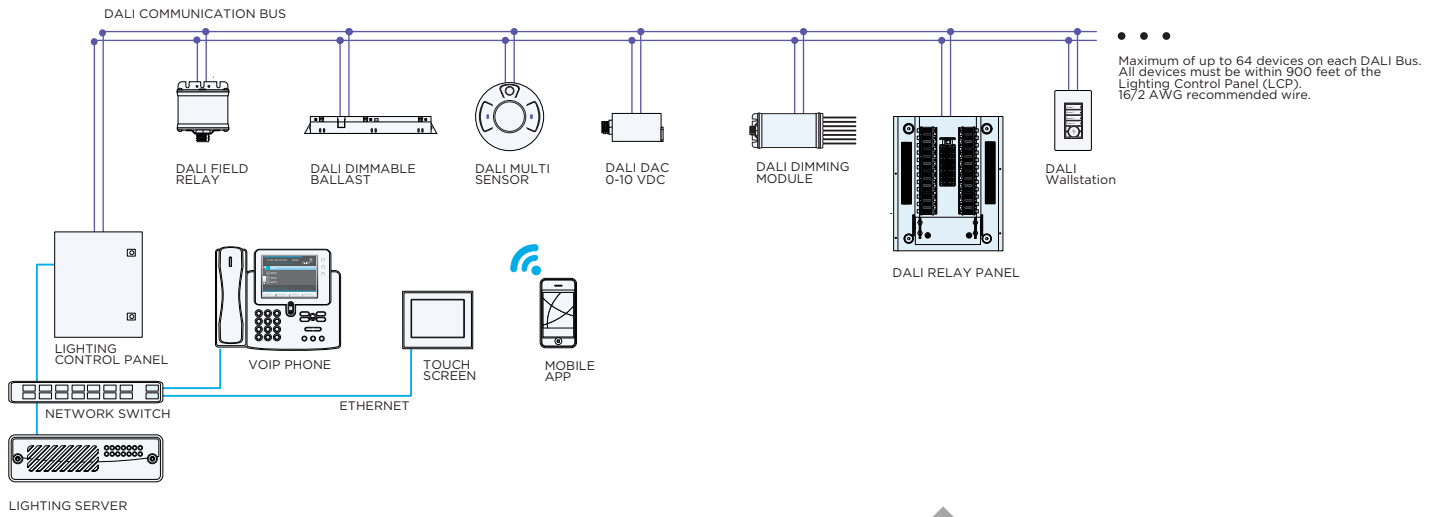

Ordering

Catalog #	Description
FLT-LVD-01-W	Low Voltage Wallstation, White, 1 Button
FLT-LVD-02-W	Low Voltage Wallstation, White, 2 Button
FLT-LVD-04-W	Low Voltage Wallstation, White, 4 Button
FLT-LVD-05-W	Low Voltage Wallstation, White, 5 Button
FLT-LVD-06-W	Low Voltage Wallstation, White, 6 Button
FLT-LVD-08-W	Low Voltage Wallstation, White, 8 Button
FLT-LVD-10-W	Low Voltage Wallstation, White, 10 Button

Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P:770-486-4800
www.cooperlighting.com

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. ACC140104
August 21, 2014

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.