

Project		Catalog #		Type	
Prepared by		Notes		Date	



### Interactive Menu


- Ordering Information [page 2](#)
- Product Specifications [page 2](#)
- Mounting & Accessory Details [page 3](#)
- Energy and Performance Data [page 5](#)

### Quick Facts


- Selectable CCT 3000K-4000K-5000K
- Selectable lumens 11,000 - 42,000
- Replaces 70W to 1000W HID floodlights
- High efficiency: up to 170 lm/W
- Operates at -40°C to 40°C (-40°F to 104°F)
- Integral 6kV surge protection

### Dimensional Details

Trunnion Mount

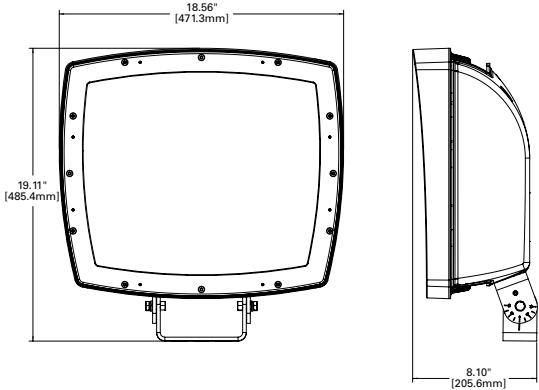

Slipfitter Mount

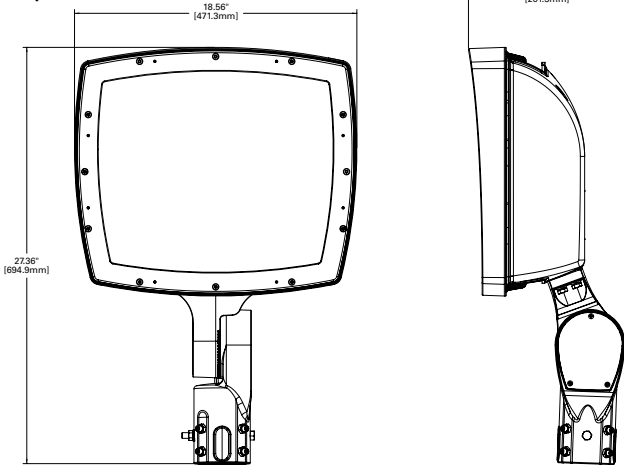

NOTES:  
1. 1.5G rated when using a trunnion mount.  
2. 3G rated when using a slipfitter mount.

# Lumark

## Night Harrier Large

### Floodlight Luminaire

### Product Certifications & Features



## Stock Ordering Information

Model Number <sup>1</sup>	Lumens/Wattage	CCT Selectable	Voltage	Mounting	Controls
NHRS100UT	Selectable Lumens: 11,000 - 42,000 / 80-290W	3000K-4000K-5000K / 70 CRI	120 - 277V	Trunnion	-
NHRS100US	Selectable Lumens: 11,000 - 42,000 / 80-290W		120 - 277V	Slipfitter <sup>2</sup>	-
NHRS100HT	Selectable Lumens: 11,000 - 42,000 / 80-290W		347 - 480V	Trunnion	-
NHRS100HS	Selectable Lumens: 11,000 - 42,000 / 80-290W		347 - 480V	Slipfitter <sup>2</sup>	-

## NOTES:

- All stock models are NEMA 6H x 6V Wide Distribution and Carbon Bronze finish.
- Fits 2-3/8" O.D. tenon, wire leads run through slipfitter.

## Ordering Information

Sample Number: NHRS100U33TBK-PER

Product Family <sup>1,2</sup>	Light Engine Configuration	Voltage	Distribution	Mounting	Finish	Options
<b>NHR</b> =Night Harrier Floodlight <b>BAA-NHR</b> =Night Harrier Floodlight, BAA Buy American Act Compliant <sup>3</sup> <b>TAA-NHR</b> =Night Harrier Floodlight, TAA Trade Agreements Act Compliant <sup>3</sup> <b>BABA-NHR</b> =Night Harrier Floodlight, BABA Build America Buy America Act Compliant <sup>3</sup>	<b>S100</b> =Up to 1000W HID Replacement, 4 position selectable lumens, 3 CCT Select (3000K-4000K-5000K)	<b>U</b> =Universal, 120-277V <b>H</b> =High Voltage, 347-480V	<b>[Blank]</b> =NEMA 6H x 6V Wide <b>33</b> =NEMA 3H x 3V Spot	<b>T</b> =Trunnion <b>S</b> =Slipfitter	<b>[Blank]</b> =Carbon Bronze <b>AP</b> =Grey <b>BK</b> =Black <b>BZ</b> =Textured Bronze <b>DP</b> =Dark Platinum <b>GM</b> =Graphite Metallic <b>WH</b> =Textured White <b>WT</b> =Summit White	<b>PER</b> =NEMA 3-PIN Twistlock Photocontrol Receptacle <b>PER7</b> =NEMA 7-PIN Twistlock Photocontrol Receptacle

## NOTES:

- DesignLights Consortium® Qualified. Refer to [www.designlights.org](http://www.designlights.org) Qualified Products List under Family Models for details.
- Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications. Refer to installation instructions and pole white paper WP513001EN for additional support information.
- Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately, may be separately analyzed under domestic preference requirements.
- Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

## Accessory Ordering Information

Accessories (Order Separately) <sup>2,3,5</sup>	
<b>NHR100-TS2-XX</b> =Top and Side Visors <sup>1,4</sup> <b>NHR100-WG</b> =Wire Guard <sup>4</sup> <b>NHR100-LK-XX</b> =Lens Kit <sup>1</sup> <b>NHR100-SK-XX</b> =Slipfitter Kit <sup>1</sup>	<b>OA/RA1013</b> =Photocontrol Shorting Cap <b>OA/RA1014</b> =NEMA Photocontrol - 120V <b>OA/RA1016</b> =NEMA Photocontrol - Multi-Tap 105-285V <b>OA/RA1021</b> =NEMA Photocontrol - 347V <b>OA/RA1027</b> =NEMA Photocontrol - 480V

## NOTES:

- Replace XX with paint color.
- For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
- Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
- Cannot combine NHR100-TS2 (Top and Side Visor) and WG (Wire Guard), limited to one external guard per fixture.
- Order accessories as separate items for field installation. Refer to standard ordering information to add options. Refer to In-Stock Guide for availability.

## Product Specifications

## Construction

- Die-cast aluminum housing
- Durable powder coated surface
- Fully sealed tempered glass
- Top and Side Visor constructed of steel with a poly powder coat finish
- Wire Guard constructed of 11-gauge wire in a 1"x1" cell pattern. Chrome color poly powder coat finish
- Removable faceplate allows easy lens replacement. Lens replacement kit must specify finish and ordered separately as an accessory
- Fixture IK08 rating without wire guard accessory

## Controls

- Selectable configurations offer internal toggle switches for adjusting luminaire CCT and lumens.
- Default settings for selectable luminaires are 4000K CCT and maximum lumen output.
- NEMA 3-PIN twistlock photocontrol receptacle and NEMA 7-PIN twistlock photocontrol receptacles are available as options.

## Electrical

- Suitable for use in 40°C to 40°C ambient temperatures
- >.9 power factor
- <20% total harmonic distortion
- Class P driver incorporates integral 6kV surge protection
- 3 ft type STWA outdoor rated cable with pre-stripped wires included with trunnion and slipfitter mounting options.

## Mounting

- Slipfitter: Suitable for 2-3/8" OD tenons.
- Trunnion: Suitable for mounting within 4' (1.2 m) of the ground.

## Tilt degree

- Slipfitter: -5° to +145° in 5° increments
- Trunnion: -90° to +90° in 22.5° increments

## Compliance

- DLC and DLC Premium listed – visit [designlights.org](http://designlights.org) to confirm listed variations
- BAA domestic preference option meets BAA requirements. See [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information
- FHWA and FTA agencies are utilizing their BAA rules for BABA compliance. Cooper's products with a BAA designation are manufactured in the US and utilize a BAA COTS exemption rule for compliance. To verify a configured product with specific accessories and options meet BABA Domestic Preference Requirements; submit this catalog number to Cooper Lighting Quotation team for validation by our Engineering and Manufacturing teams. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements

## Finish

- Carbon Bronze standard / other colors available

## Typical Applications

- Parking Lot Illumination
- Building lighting
- Sign lighting
- Commercial lighting

## EPA

- Effective Projected Area (Sq. Ft.): EPA 2.33

## Shipping Data

- Case Dimensions and Approximate Net Weight: 20.6 x 24.2 x 11.9 (in) | 43 lbs.
- Full pallet Dimensions and Approximate Net Weight: 42 x 50 x 52.4 (in) | 735 lbs.
- Maximum pallet height: 54 in.
- Pallet qty: 16
- Layers x Cases: 4 x 4


## Warranty

- Five-year limited warranty. Consult website for details. [www.cooperlighting.com/legal](http://www.cooperlighting.com/legal)


## Mounting & Accessory Details

### Mounting Types


**Trunnion Mount**

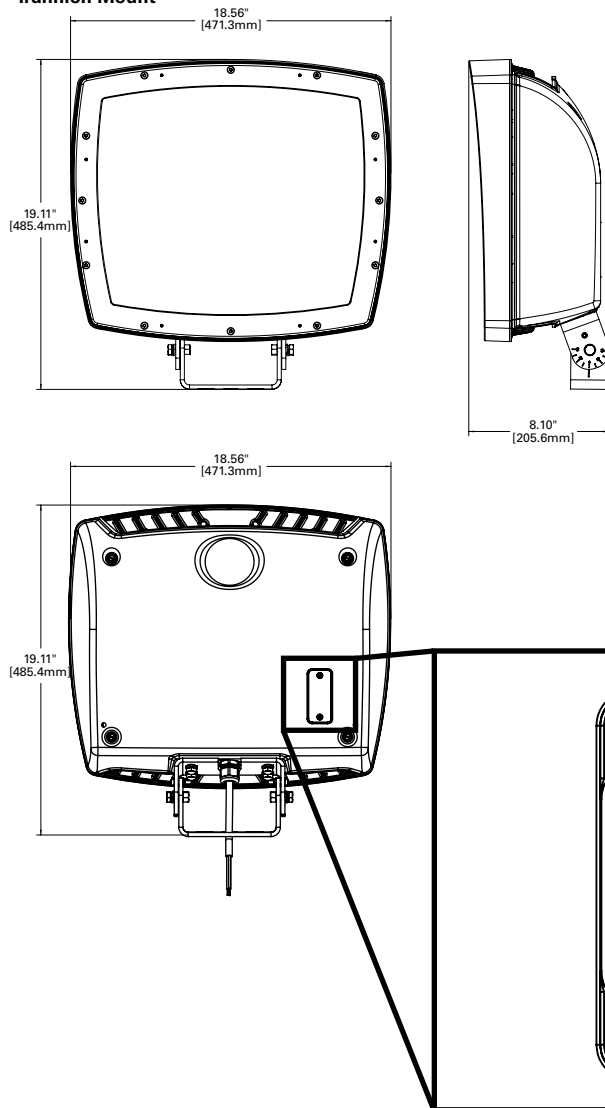


**Slipfitter Mount**

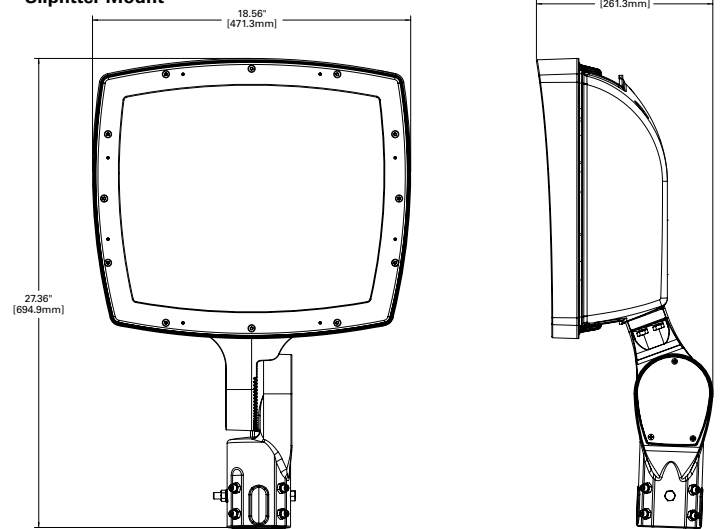


### Mounting hole pattern

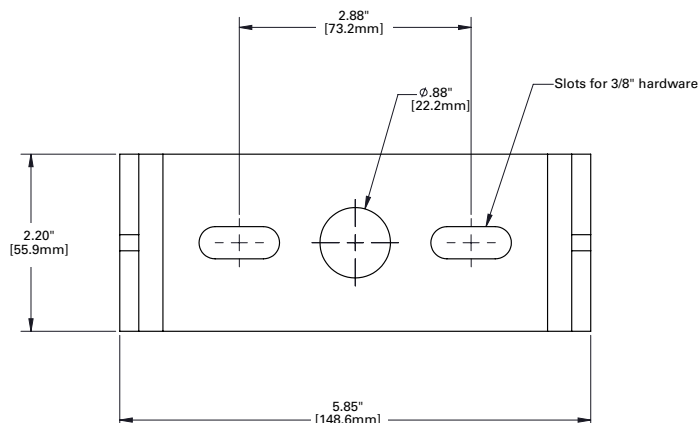


**NHR100-SK-XX = Slipfitter Kit**

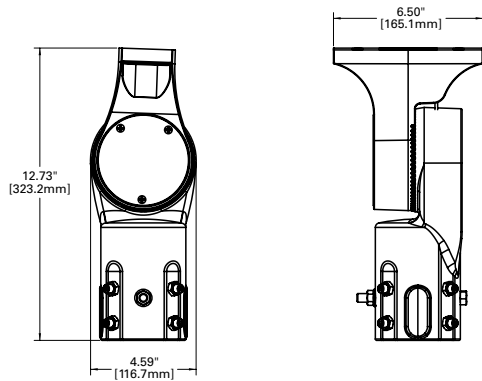


**NHR100-LK-XX = Lens Kit**

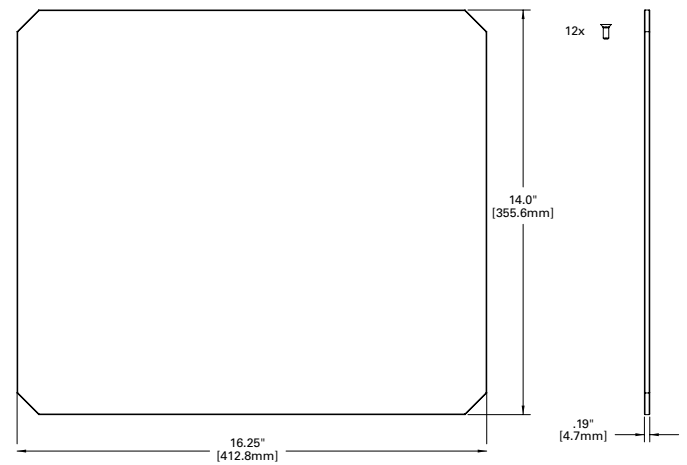

**NHR100-WG = Wire Guard**

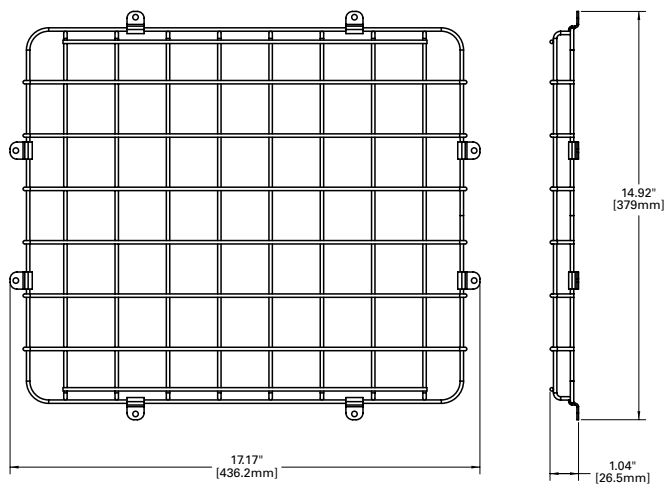

**NHR100-TS2-XX = Top and Side Visors**

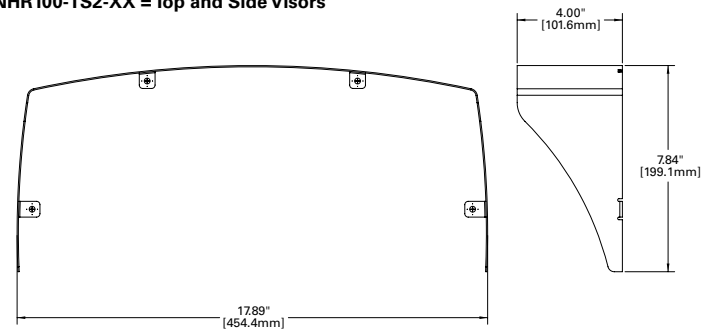

Energy and Performance Data

Power and Lumens

	6x6			3x3		
S100	NHRS100730	NHRS100740	NHRS100750	NHRS100730	NHRS100740	NHRS100750
Power(Watts)	293	288	297	293	288	297
Lumens	36329	42365	39518	35036	40688	37966
Lumens per Watt	123.9	147	133	119.5	141.2	127.8
Input Current @ 120V (A)	2.5	2.4	2.5	2.5	2.4	2.5
Input Current @ 277V (A)	1.08	1.05	1.1	1.08	1.05	1.1
Input Current @ 347V (A)	0.87	0.85	0.88	0.87	0.85	0.88
Input Current @ 480V (A)	0.63	0.61	0.64	0.63	0.61	0.64

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance 50,000 hours*	Theoretical L70 (Hours)
Up to 40°C	94.18%	> 60,000

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
10°C	1.04
15°C	1.02
25°C	1.00
40°C	0.96

Selectable Lumen Settings

Dim Switch Position	Percent of Typical Lumen Output
25	25%
50	50%
75	75%
100	100%