


DESCRIPTION

Specification grade 32 Watt triple tube compact fluorescent fixture rated for direct contact with insulation, for use in wet locations, and in closets where light is needed on upper shelves. Veined Italian dropped glass diffuser provides a soft smooth illumination pattern. Triple tube lamps

provide excellent color and long life. Dimming and emergency ballast options are available. **Lamp module and optical element can be changed after installation to provide a variety of lamp sources and distributions. e.g. into a PAR36 Adjustable**

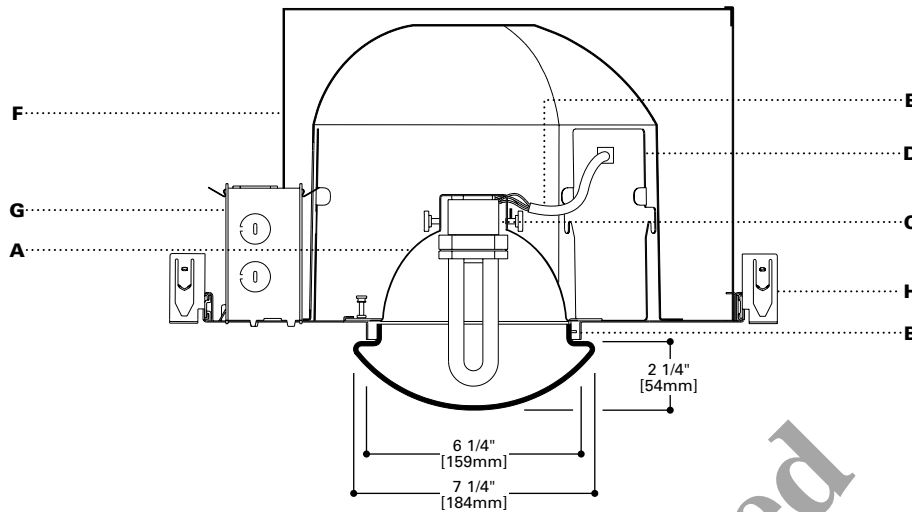

SPECIFICATION FEATURES

A...Reflector/Lens

.040 thick aluminum spun upper reflector with white powdercoat finish. Etched satin glass obscures lamp image.

B...Attachment

Positive torsion springs pull glass tight to ceiling. Gasket is a closed cell foam.

C...Socket

4 pin G24q3 base for 32/26W PLT, TBX and TTT lamps. Fatigue free stainless steel spring ensures positive lamp retention. Fixed socket height ensures consistent lamp position.

D...Electronic Ballast

Thermally protected, current controlled electronic ballast produces full light output and rated lamp life. Provides flicker free and noise free operation and starting. Meets stringent Class B requirements, FCC part 18, for non-commercial applications.

E...Electrical

Keyed quick connect provides easy lamp module installation.

F...Frame/Housing

Hot dipped galvanized 20 gauge steel frame with built in 1/2 inch plaster lip. Gunsights allow for consistent alignment. Aluminum .032 thick housing allows for heat dissipation and reduces weight.

G...Junction Box

18 cubic inches, listed for 4#12 AWG or 6#14 AWG 90° C additional feed through conductors, has six 1/2 inch pryouts.

H...Bar Hangers


No Flex® bar hangers with positive locking, for use with wood, engineered wood and steel frame joists spaced up to 24" O.C. ship with platform. For use in T-bar ceilings order accessory MBCLP. Nailless barb and locator lip provide consistent installation height.

I...Codes

Thermally protected, IP labeled, for use in direct contact with insulation. Meets Washington State Air tight requirements, 1995 CABO Model Energy Code.

J...Labels


UL and cUL listed, standard wet label, IBEW union made.



**P5
M32T
E5LUNA**

32W TRIPLE
Compact Fluorescent

5" DROPPED LENS
SHOWERLIGHT



Ceiling Cutout
6 1/6" [159mm]

ENERGY DATA

5" AirTight

Input Power:
120V = 36W
Input Current (Max.):
120V = .306
Power Factor:
120V = .98
T.H.D.:
120V = <10%

M32T Lutron

Input Power:
120V = 36W
Input Current (Max.):
120V = .33A
Power Factor:
120V = > .95
T.H.D.:
120V = < 20%

ORDERING INFORMATION

Complete unit consists of a platform, module and element

Platform

P5

P5 = 5"
Airtight IC
Rated
Housing

Lamp Module

M32T = 32W
Compact Fluorescent
Ballast
M32TLutron = 32W
only Tu Wire
Dimming

Optical Element

E5LUNA

E5LUNA = 5" Dropped
Lens Showerlight

Accessories

MBCLP = 40 Push On T Bar
Clips (for 10 Units)
PLE5 = Plaster Lip Extension
for Max 2" Thick Ceiling

For Emergency Option order P532TEMER
and E5LUNA. See Iris Catalog for ordering
information

For additional options please consult factory.

PHOTOMETRICS


P5-M32T-E5LUNA

Test No. H36081
 Lamp: 32W PLT
 Lumens: 2400
 Spacing: 1.4
 Efficiency: 35.9%
 Unit LPW: 23.9

Candelas

Vertical Angle	CD
90	48
85	59
75	84
65	114
55	144
45	173
35	196
25	211
15	218
5	219
0	219

Distribution



Cone of Light

Distance to Illum. Plane	Initial Nadir Footcandles	Beam Diameter
4'6"	11	6'0"
5'6"	7	7'0"
6'6"	5	8'6"
8'0"	3	10'6"
10'0"	2	13'0"
12'0"	2	15'6"

Lamp Multiplier
 26W = .75

Single Fixture

2'0" Distance from Wall

DD	1'	2'	3'	4'
1	21	15	7	3
2	15	12	7	4
3	8	7	5	3
4	5	4	3	2
5	3	3	2	2
6	2	2	1	1
7	1	1	1	1
8	1	1	1	1
9	1	1	1	0
10	0	0	0	0

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Luminaire
0-30	180	7.5	20.8
0-40	302	12.6	35.0
0-60	565	23.5	65.5
0-90	832	34.7	96.4
90-180	31	1.3	3.6
0-180	863	35.9	100.0

Coefficient of Utilization

Ceiling Reflectance	80%				70%				50%				30%				0%
Wall Reflectance	70	50	30	10	50	10	50	10	50	10	50	10	50	10	50	10	0
Room Cavity Ratio																	
0	43	43	43	43	41	41	39	39	37	37	35	35	33	33	31	29	27
1	38	36	34	32	35	32	33	31	32	29	27	24	22	22	20	19	16
2	34	31	28	26	30	26	29	25	27	24	21	18	16	15	14	12	10
3	31	27	24	21	26	21	25	21	24	20	19	16	14	13	12	10	9
4	29	24	21	18	23	18	22	18	21	17	15	14	12	11	10	9	8
5	26	21	18	15	21	15	20	15	19	15	14	12	11	10	9	8	7
6	24	19	16	13	19	13	18	13	17	13	12	11	10	9	8	7	6
7	22	17	14	11	17	11	16	11	15	11	10	9	8	7	6	5	4
8	20	15	12	10	15	10	14	10	14	10	9	8	7	6	5	4	3
9	19	14	11	9	14	9	13	8	13	8	7	6	5	4	3	2	1
10	18	13	10	8	12	8	12	7	11	7	6	5	4	3	2	1	0

Notes and Formulas:

Cone of Light:

- Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.
- Footcandle values are initial. Apply appropriate light loss factors where necessary.

See pages 64-65 of Iris Catalog.

Wall Illumination:

- Illuminance values are cosine corrected initial values with no contribution from inter reflections from other room surfaces. Total illumination may increase from contributions from other surfaces.
- DD=Distance Down from Ceiling.

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com