

Description

Recessed LED module with interchangeable 2-inch round or square lens pinhole apertures are available in various finishes to suit any décor. Use with 4-inch nominal recessed housings suitable for residential and shallow plenum commercial construction or can be used to retrofit existing installations. Field interchangeable primary optics provide various distribution patterns and spacing to mounting height ratios. Use for general and task lighting in low to medium height ceilings where energy savings, long life and optical control are required.

| | | | |
|-------------|--|------|--|
| Catalog # | | Type | |
| Project | | | |
| Comments | | Date | |
| Prepared by | | | |

Specification Features

Module

- Field interchangeable and upgradable LED module consists of LED array, primary optic and driver
- Integral die cast aluminum heat sink provides passive thermal cooling achieving L70 at 50,000 hours in IC and non-IC applications.

Retention

- Stainless steel springs hold module securely in the housing, can be removed thru the aperture for service or replacement

LED Array

- Proximity phosphors over chip on board LEDs provide a uniform source with high efficiency and no pixilation
- Available in 90 CRI minimum, R9 greater than 50 and color accuracy within
- 3 SDCM provide color accuracy and uniformity

Gaskets

- Closed cell gaskets achieve restrictive airflow requirements without additional caulking

Trims

- Die formed steel trims are available in 2-inch round or square pinhole apertures and can be interchanged in the field
- Available in a broad range of painted or plated finishes, can be painted in the field to match any décor
- Magnetic attachment holds trim tightly to ceiling and eliminates light leaks

Media

- Integral media holder provided accepts (1) 2" diameter 3.0mm thick color filters, lens or louvers
- Order media separately

Primary Optic

- Precision molded TIR optic organizes source flux into useful beams without stray lumens in the field
- Two-piece construction with matte black mounting ring and polarized turn and lock mounting aligns optic to source and minimizes backlight in the housing
- Exceeds ENERGY STAR® color angular uniformity requirements, color deviation is typically less than 0.002 u' v'.
- Available in spot, narrow flood, flood and wide flood distributions, ships with narrow flood or flood factory installed, order alternate distributions or replacement separately
- Integral media holder accepts (1) lens or louver

VividTune

- D2W™ dim-to-warm option shifts color temperature from 3000 K to 1850 K as fixture dims mimicking the black body dimming response of halogen sources

Driver

- Integral UNV 120 - 277V 50/60 Hz constant current driver provides noise free operation and can be replaced in the field
- Continuous, flicker-free dimming from 100% to 5% with select leading or trailing edge 120V phase cut dimmers
- Optional UNV 120-277V 50/60 Hz driver with 0 -10V analog dimming from 100% to 5%, provided with inline electrical quick connect for low voltage connections
- Medium base (E26) to CJT adapter (provided) provides mains connection.

Compliance

- cULus listed for use with Halo housings, classified for use with other's housings, see instruction sheet for conditions of acceptability
- Wet location listed, covered ceilings only.
- Airtight per ASTM-E283
- Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements
- EMI/RFI emissions per FCC 47CFR Part 15 consumer limits
- Contains no mercury or lead and RoHS compliant
- Photometric testing in accordance with IES LM-79-08
- Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11
- Can be used for State of California Title 24 high efficacy LED compliance under JA8, reference Modernized Appliance Efficiency Database System (MAEDBS) for 2016 JA8 High Efficacy Lighting
- Certified to State of California Title 20, State-regulated LED Lamp; reference Modernized Appliance Efficiency Database System (MAEDBS) for State-regulated LED Lamp
- Energy Star certified, reference Certified Light Fixtures database

Warranty

Five year limited warranty, consult website for details.

www.cooperlighting.com




ML4D

TL43R

TL44S


2-Inch Round and Square Lens Pinhole Downlight

Up to 1100 lumens



Refer to ENERGY STAR® Qualified Products List. Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Appliance Efficiency Database under JA8. Indoor LED nominal CCT of 4000K or less.

Dimensions

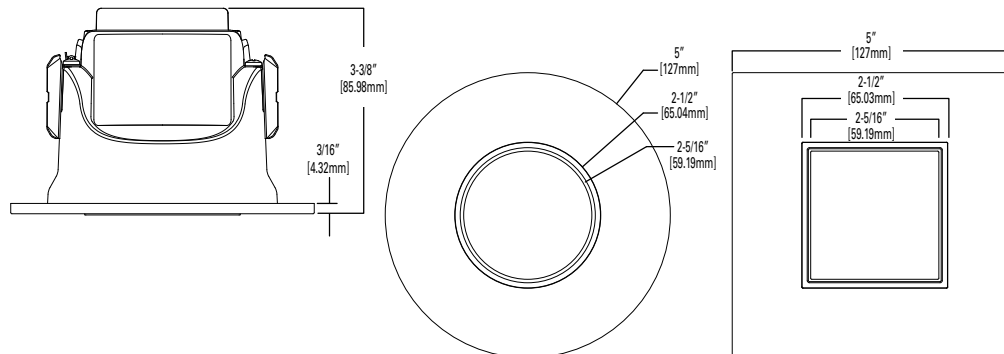

ENERGY DATA

| Lumens | 900 Series | |
|-----------------------|------------|----------|
| Input Voltage | 120V | 277V |
| Input Current | 107 (mA) | 50 (mA) |
| Input Power | 12.8 (W) | 12.5 (W) |
| Inrush (A) | 1.1 (A) | 1.9 (A) |
| THD: ≤ 20% | | |
| PF: ≥ 0.90 | | |
| T Ambient -40 - +40°C | | |
| Sound Rating ≤ 20dba | | |

Ordering Information

SAMPLE NUMBER: ML4D09NFL927E - TL43R2GMWWB

A complete luminaire consists of a housing, LED module and trim, order separately.

| Models | Lumens | Distribution | CRI/CCT | Driver | Accessories |
|---|---------------------------------|--|--|--|---|
| ML4D = 4" LED module | 09 =900 lumens (nominal) | NFL =25 degree narrow flood FL =40 degree flood | 927 =90 CRI (min), 2700K 930 =90 CRI (min), 3000K 935 =90 CRI (min), 3500K 940 =90 CRI (min), 4000K D2W =90 CRI (min) color shifts from 3000 to 1850K mimicking black body dimming ² | E =UNV 120 - 277V 50-60Hz, LE & TE phase cut 5% dimming at 120V only E010 =UNV 120 - 277V 50-60Hz, 0 - 10V analog 5% dimming ¹ | TIR45SP15 =15° spot TIR45NFL25 =25° narrow flood TIR45FL40 =40° flood TIR45WFL55 =55° wide flood TIR50AWW25 =25° narrow flood asymmetric / wall wash TIR45MH12PK =replacement media holder, package of 12 L100 Series =2.0" lens and filters, see spec sheet |
| Trims | Shielding | Flange Finish | Accessories | | |
| TL43R = 2" round lens pinhole TL44S = 2" square lens pinhole | 2G =Diffuse clear | MWWB =Matte white flange, white lens frame MWBB =Matte white flange, black lens frame MBBB =Matte black flange, black lens frame BNBB =Brushed nickel flange, black lens frame ORBBB =Oil rubbed bronze flange, black lens frame GBBB =German bronze flange, black lens frame BCuBB =Brushed copper, black lens frame | T24HWKIT =Title 24 hard wire kit, converts incandescent, low voltage and compact fluorescent housings to LED | | |

Housings

Halo Ultra-shallow LED Housings

H245ICAT=4" IC, airtight ultra-shallow new construction housing, LED, 120 - 277V
H245RICAT=4" IC, airtight ultra-shallow remodeler housing, LED, 120 - 277V

Halo LED Housings

H995ICAT=4" IC, airtight shallow new construction housing, LED, 120 - 277V
H995RICAT=4" IC, airtight shallow remodeler housing, LED, 120 - 277V

Halo Housings*

H45ICATD010=4" IC, airtight shallow new construction housing, LED, 120 - 277V, 0 - 10V dimming
H45RICATD010=4" IC, airtight shallow remodeler housing, LED, 120 - 277V, 0 - 10V dimming
H99TAT=4" non-IC, airtight shallow new construction housing, E26, 120V
H99RTAT=4" non-IC, airtight shallow remodeler housing, E26, 120V
H99ICAT=4" IC, airtight shallow new construction housing, E26, 120V
E4TATSB=4" non-IC, airtight shallow new construction housing, adjustable socket bracket, E26, 120V
E4RTATSB=4" non-IC, airtight shallow remodeler housing, adjustable socket bracket, E26, 120V
E4ICATSB=4" non-IC, airtight shallow new construction housing, adjustable socket bracket, E26, 120V
H4NCMF=4" new construction mounting frame

Halo Surface Mount Housings

HS4R=Surface round, 120-277V
HS4S=Surface square, 120-277V



HE26LED*
Requires Edison Base Adapter for retrofit (order separately)

Notes:

1. For 0-10V control the "E010=UNV 120 - 277V 50-60Hz, 0 - 10V analog 5% dimming" option must be used with either H45ICATD010 or H45RICATD010 housings
2. Actual lumens for D2W.


Photometry

ML4D09_930 - TIR45SP15 - TL43R2GX_TL44S2GX


| | |
|------------------|---|
| Description | Halo 2 Inch ML4 Round And Square Lensed Downlight-Narrow Flood Distribution |
| Test Number | P275316 |
| Module | 900 Series, 90CRI, Narrow Flood optic |
| Trim | 2" Aperture, Open Round DL |
| Lumens | 1140 Lm |
| Efficacy | 100.9 |
| Spacing Criteria | 0.43 |

Color Metric Summary

| | |
|----------|-----------------------|
| TM-30-15 | R _f = 92.7 |
| | R _g = 99.1 |
| CRI/ CIE | R _a = 94.2 |
| | R ₉ = 59.9 |



Candlepower Distribution

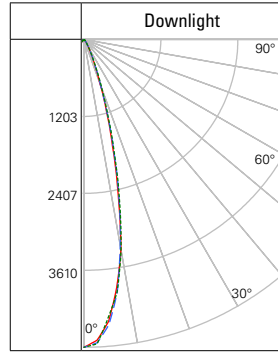

Candelas at Nadir

| Angle | 0-deg |
|-------|-------|
| 0 | 4813 |
| 5 | 4426 |
| 10 | 3328 |
| 20 | 738 |
| 30 | 142 |
| 40 | 41 |
| 50 | 13 |
| 60 | 4 |
| 70 | 2 |
| 80 | 1 |
| 90 | 0 |

Foot-candle Values at Nadir

| 0 deg Aiming Angle | | |
|--------------------|-------|-----|
| DD | FC | DIA |
| 5.5' | 159.1 | 2.4 |
| 7' | 98.2 | 3 |
| 8' | 75.2 | 3.4 |
| 9' | 59.4 | 3.8 |
| 10' | 48.1 | 4.4 |
| 12' | 33.4 | 5.2 |


DD = distance down to illuminated work plane
FC = initial foot-candles at nadir
DIA = diameter

ML4D09_930 - TIR45FL40 - TL43R2GX_TL44S2GX


| | |
|------------------|---|
| Description | Halo 2 Inch ML4 Round And Square Lensed Downlight- Flood Distribution |
| Test Number | P275333 |
| Module | 900 Series, 90CRI, Flood optic |
| Trim | 2" Aperture, Open Round DL |
| Lumens | 1113 Lm |
| Efficacy | 98.5 |
| Spacing Criteria | 0.64 |

Color Metric Summary

| | |
|----------|-----------------------|
| TM-30-15 | R _f = 92.7 |
| | R _g = 99.1 |
| CRI/ CIE | R _a = 94.2 |
| | R ₉ = 59.9 |



Candlepower Distribution

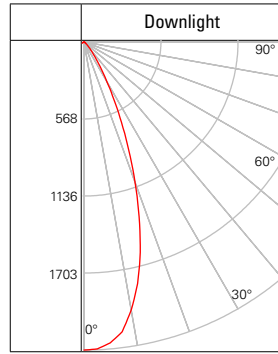

Candelas at Nadir

| Angle | 0-deg |
|-------|-------|
| 0 | 2271 |
| 5 | 2226 |
| 10 | 2006 |
| 20 | 1102 |
| 30 | 340 |
| 40 | 80 |
| 50 | 22 |
| 60 | 8 |
| 70 | 4 |
| 80 | 2 |
| 90 | 0 |

Foot-candle Values at Nadir

| 0 deg Aiming Angle | | |
|--------------------|------|-----|
| DD | FC | DIA |
| 5.5' | 75.1 | 3.4 |
| 7' | 46.4 | 4.4 |
| 8' | 35.5 | 5 |
| 9' | 28 | 5.6 |
| 10' | 22.7 | 6.4 |
| 12' | 15.8 | 7.6 |


DD = distance down to illuminated work plane
FC = initial foot-candles at nadir
DIA = diameter

ML4D09_930 - TIR45WFL55 - TL43R2GX_TL44S2GX


| | |
|------------------|---|
| Description | Halo 2 Inch ML4 Round And Square Lensed Downlight-Wide Flood Distribution |
| Test Number | P275353 |
| Module | 900 Series, 90CRI, Wide Flood optic |
| Trim | 2" Aperture, Open Round DL |
| Lumens | 1016 Lm |
| Efficacy | 89.9 |
| Spacing Criteria | 0.83 |

Color Metric Summary

| | |
|----------|-----------------------|
| TM-30-15 | R _f = 92.7 |
| | R _g = 99.1 |
| CRI/ CIE | R _a = 94.2 |
| | R ₉ = 59.9 |



Candlepower Distribution

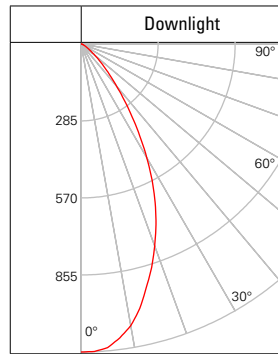

Candelas at Nadir

| Angle | 0-deg |
|-------|-------|
| 0 | 1141 |
| 5 | 1129 |
| 10 | 1059 |
| 20 | 796 |
| 30 | 487 |
| 40 | 205 |
| 50 | 69 |
| 60 | 20 |
| 70 | 6 |
| 80 | 1 |
| 90 | 0 |

Foot-candle Values at Nadir

| 0 deg Aiming Angle | | |
|--------------------|------|-----|
| DD | FC | DIA |
| 5.5' | 37.7 | 4.4 |
| 7' | 23.3 | 5.8 |
| 8' | 17.8 | 6.6 |
| 9' | 14.1 | 7.4 |
| 10' | 11.4 | 8.2 |
| 12' | 7.9 | 9.8 |



DD = distance down to illuminated work plane
FC = initial foot-candles at nadir
DIA = diameter

ML4D09_930 - TIR50AWW25 - TL43R2GX_TL44S2GX


| | |
|------------------|--|
| Description | Halo 2 Inch ML4 Round And Square Lensed Downlight-Asymmetric |
| Test Number | P275373 |
| Module | 900 Series, 90CRI, Asymmetric |
| Trim | 2" Aperture, Open Round DL |
| Lumens | 766 Lm |
| Efficacy | 67.8 |
| Spacing Criteria | 1.33 |

Color Metric Summary

| | |
|----------|-----------------------|
| TM-30-15 | R _f = 92.7 |
| | R _g = 99.1 |
| CRI/ CIE | R _a = 94.2 |
| | R ₉ = 59.9 |



Candlepower Distribution

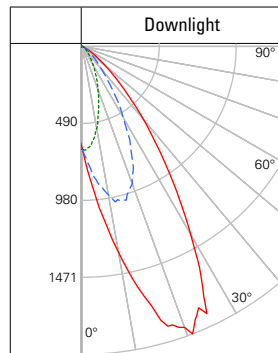

Candelas at Nadir

| Angle | 0-deg |
|-------|-------|
| 0 | 650 |
| 5 | 949 |
| 10 | 1332 |
| 20 | 1904 |
| 30 | 1380 |
| 40 | 608 |
| 50 | 193 |
| 60 | 47 |
| 70 | 8 |
| 80 | 2 |
| 90 | 0 |

Foot-candle Values at Nadir

| 0 deg Aiming Angle | | |
|--------------------|------|-----|
| DD | FC | DIA |
| 5.5' | 53.9 | 2.8 |
| 7' | 33.3 | 3.4 |
| 8' | 25.5 | 4 |
| 9' | 20.1 | 4.6 |
| 10' | 16.3 | 5 |
| 12' | 11.3 | 6 |

DD = distance down to illuminated work plane
FC = initial foot-candles at nadir
DIA = diameter

Multiplier Table

| CCT Option | 2700K | 3000K | 3500K | 4000K |
|----------------|-------|-------|-------|-------|
| CCT Multiplier | 0.93 | 1.00 | 1.04 | 1.06 |

Representative photometric test report for 3000K color temperature, 90CRI.
Multipliers may be used to determine other relative CCT values.



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Specifications and dimensions subject to change without notice.