

## E26 6" Trim Series

### DESCRIPTION

Tapered reflector trim with self-flange in the 6" trim family for use in recessed downlighting. Compatible for use in Halo and other housings.

Catalog #		Type
Project		
Comments		Date
Prepared by		

### SPECIFICATION FEATURES


- Self-flanged reflector cone
- Contoured tapered sides of cone for use with reflector lamps
- Coil spring retention
- Self-flanged trim ring sized to hide gaps caused by construction tolerances

Housings	Max Lamp Compatibility
H7ICT	H7RICT
H7ICAT	H7RICAT
E7ICAT	E7RICAT
75W PAR30S, 75W PAR30L, 65W BR30, 85W BR40	
H7UICAT	
75W PAR30S, 75W PAR30L, 65W BR30	
H27ICAT	E27ICAT
H27RICAT	E27RICAT
50W PAR30S, 75W PAR30L, 65W BR30	
H7T	E7TAT
H7TCP	
H7RT	E7RTAT
75W PAR30S, 75W PAR30L, 65W BR30	
H27T	E27TAT
H27RT	E27RTAT
75W PAR30S, 75W PAR30L, 65W BR30	

Compatible with Halogen, Incandescent, LED\* or CFL\* lamps.

IC

Non-IC

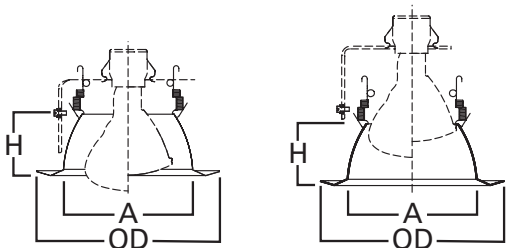

### Dimensions:

A: 5-7/16" [138mm]

H: 2-5/8" [65mm]

OD: 7-3/4" [197mm]

### ORDERING INFORMATION

SAMPLE NUMBER: 6107SC

Trim	Finish
6107= 6" Tapered Reflector, Self-flange	SC=Specular Reflector, White trim

### HALO HOUSING COMPATIBILITY

Trim #	Style	H7ICT	H7ICAT	H7RICT	H7RICAT	E7ICAT	E7RICAT	H7UICAT	H7ICTNB
6107	Reflector	•	•	•	•	•	•	•	—
		H7ICATNB	E7ICATNB	H27ICAT	H27RICAT	E27ICAT	E27RICAT		
		—	—	•	•	•	•		
		H7T	H7TCP	H7RT	E7TAT	E7RTAT	H7TNB	E7TATNB	H27T
		•	•	•	•	•	—	—	•
		H27RT	E27TAT	E27RTAT					
•	•	•							

For use in select other's housings, refer to U.L. Classification list at [www.cooperlighting.com](http://www.cooperlighting.com)

\*UL1993 listed LED & CFL equivalent lamps permitted. Consult lamp manufacturer for conditions of use. Cooper Lighting Solutions does not warranty the lamp.



**6107SC**  
Specular Reflector,  
White Trim

**6107**

**6-Inch Tapered Reflector  
Cone**



For use in Halo listed housings.



Select trims are classified for use in others housings. See [www.cooperlighting.com](http://www.cooperlighting.com)